

IN340107
INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, Ø34mm 85long, Non-flush, Sn: 20, 10-60V DC, PNP
NO, Cable 2m PVC, IP67, PBT


MECHANICAL FEATURES

Active area material of sensor	PBT
Alignment of cable entry	Axial
Ambient temperature	-25 °C ... 70 °C
Cable infeed	Axial
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cylinder plain
Housing material	PBT
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Non-flush
Number of cores	3
Pressure-proof	-
Sensor diameter	34 mm
Sensor length	85 mm

ELECTRICAL FEATURES

Cascadable	-
Correction factor (aluminum)	0.4
Correction factor (brass)	0.4
Correction factor (copper)	0.3
Correction factor (St37)	1
Correction factor (stainl. steel)	0.7
Hysteresis	10 %
No-load current	8 mA
Rated switching current	200 mA
Relative repeat accuracy	5 %
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 60 V
Switching distance	20 mm
Switching frequency	100 Hz
Type of electrical connection	Cable

ELECTRICAL FEATURES

Type of switching function

Normally open contact

Type of switching output

PNP

Voltage drop

2.5 V

Voltage type

DC

With LED display

+

With monitoring function of downstream devices

-

Other

Packaging dimensions

74.0mm x 74.0mm x 143.0mm

Shipping weight

0.28kg

Tariff code

85365019

Classification

ipf product group

203

eClass 8.0

27270101

eClass 9.0

27270101

eClass 9.1

27270101

ETIM-5.0

EC002714


ETIM-6.0

EC002714


ETIM-7.0

EC002714

Connection

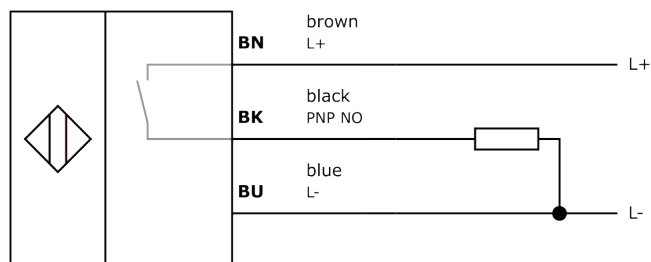

Dimensional drawing

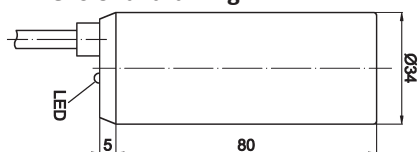

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.