
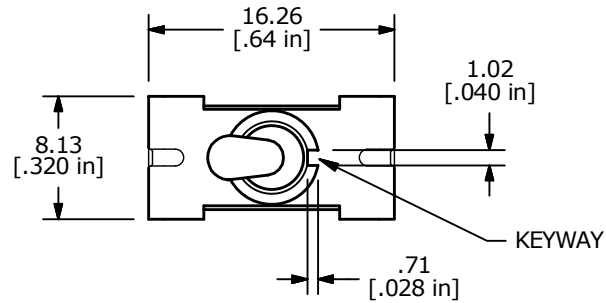
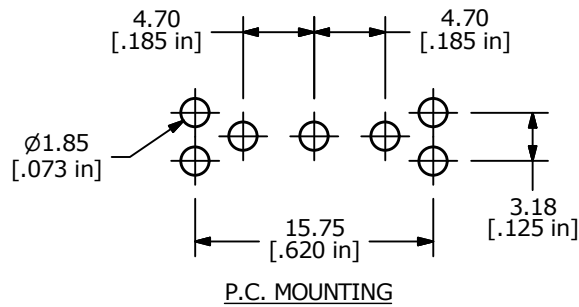



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	(ON)
2-3	N/A	2-1

() = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5A @ 120 VAC OR 28VDC
2A @ 250 VAC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. HARDWARE TO BE SHIPPED BULK:
T100011 - LOCK WASHER (Qty 1)
T100015 - LOCK RING (Qty 1)
T100000 - HEX NUT (Qty 2)

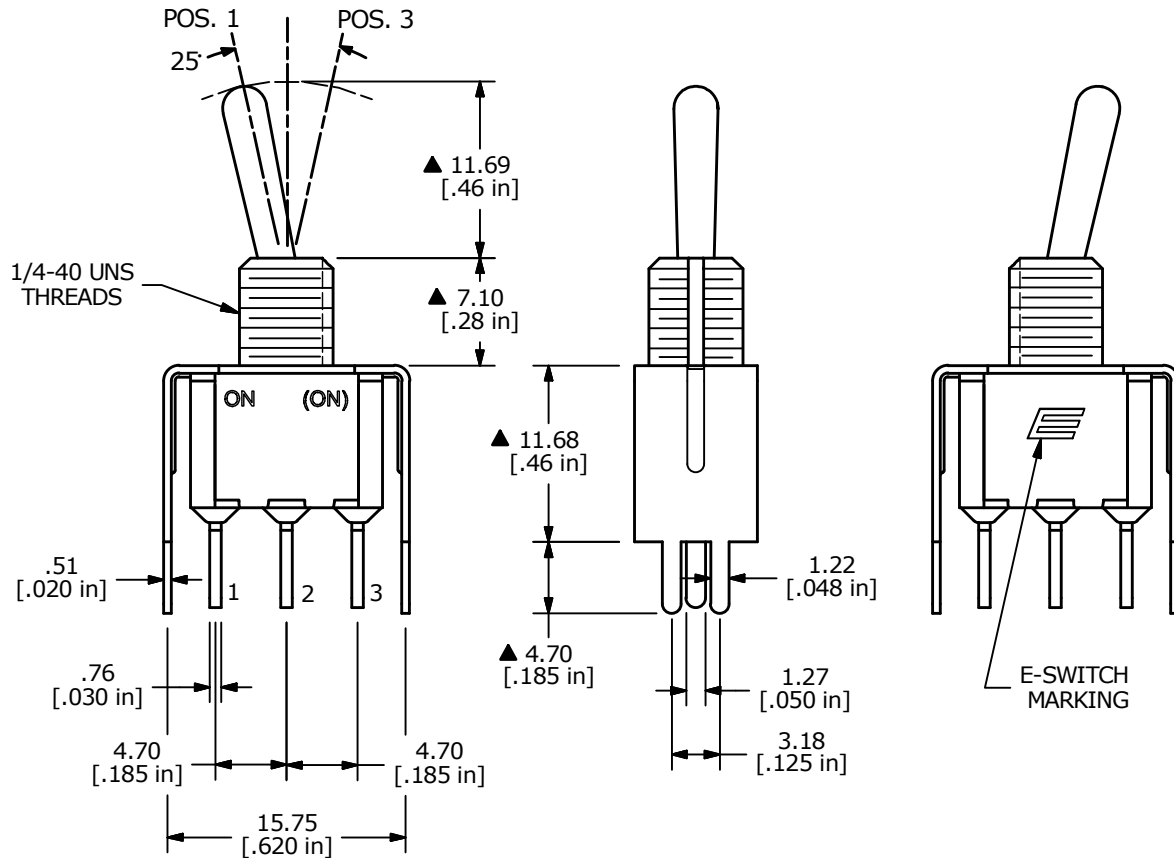

A	23980	RELEASE	8/7/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100SP2T1B3VS2QEH

SCALE 2:1	DATE 8/5/2019	DR MW	DWG ST112065	REV A
--------------	------------------	----------	-----------------	----------