
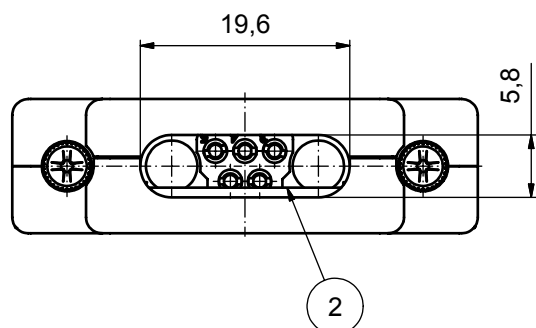
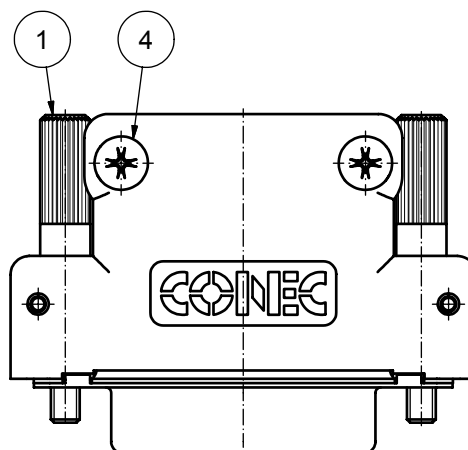
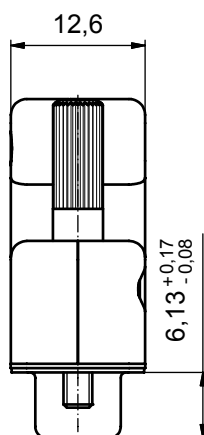
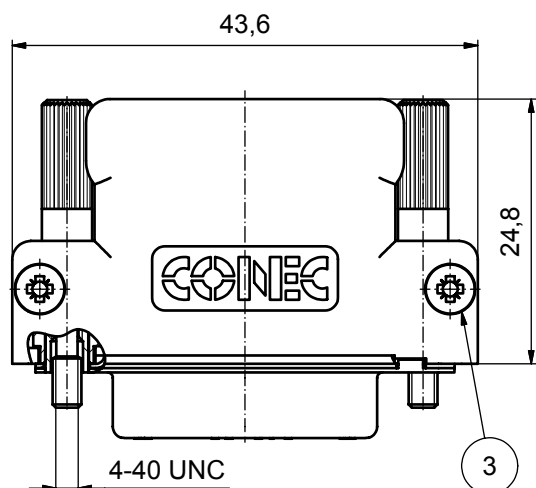
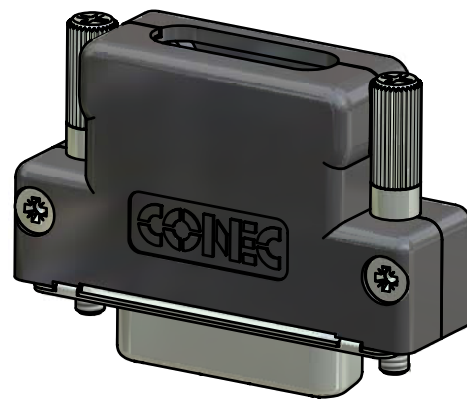


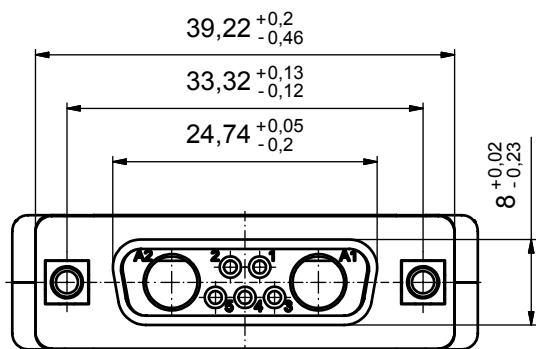

NOTES:

- HOOD: PBT GF UL 94 V0
- JACKSCREW 4-40 UNC: STEEL; NICKEL PLATED
- SCREW FOR STRAIN RELIEF: STEEL; NICKEL PLATED
- COVER SCREW: STEEL; NICKEL PLATED
- STRAIN RELIEF: STEEL; NICKEL PLATED
- FEMALE CONNECTOR 7W2, WITHOUT CONTACTS

Directive 2002/95/EC
"RoHS"
Compliant

POS. 1



2x JACKSCREW 4-40 UNC
with phillips head

POS. 2



1x CABLE STRAIN RELIEF

POS. 3



2x COVER SCREW

POS. 4



2x CABLE STRAIN RELIEF SCREW

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance	dim. in mm
				ISO 2768-m	
rev.	description	date	name	date	name
				drawn	17.12.07 Schmidt
				appd.	17.12.07 Mickenbecker
				norm	
				d-old	
a	Origin				

CONEC

scale: 2:1	
material: see notes	
title: PLASTIC HOOD with 7W2 Female Crimp Connector straight cable exit	
dwg no: Inventor 10	DIN-A3
13K4A2364	
sh: 1	
part no: 13-000380	