

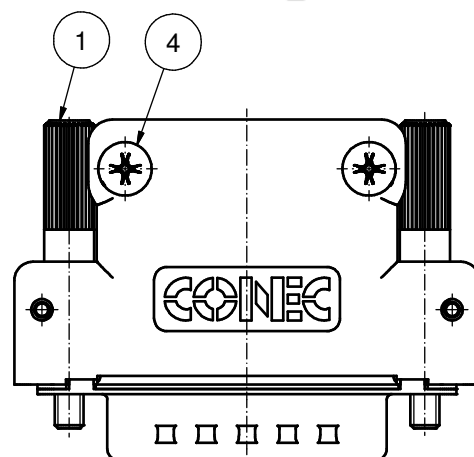
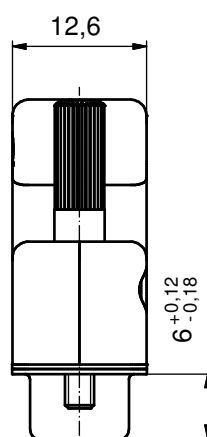
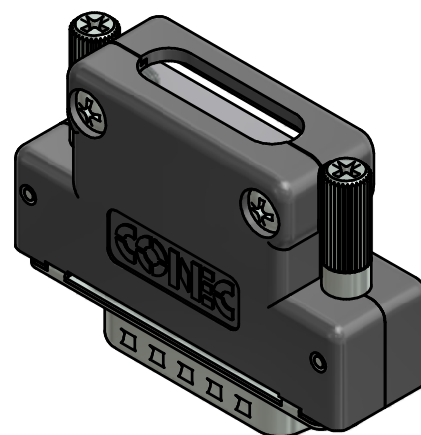
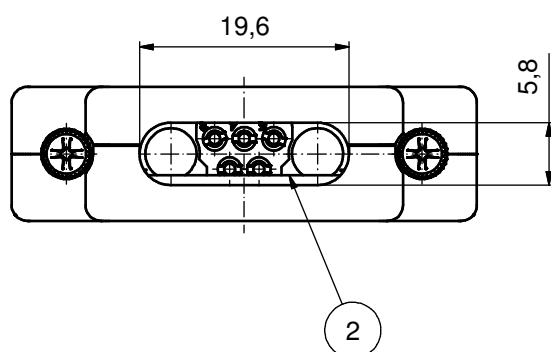


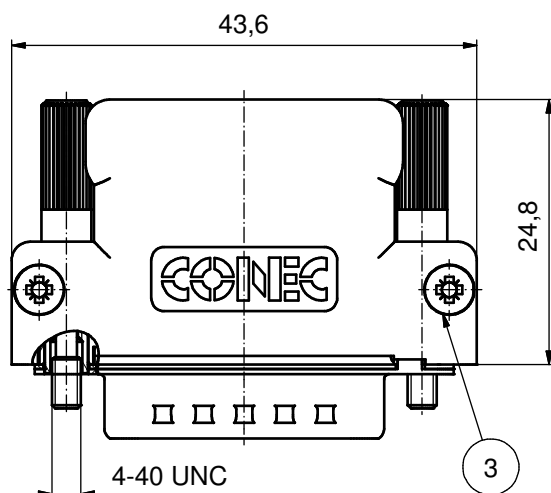

NOTES:


- HOOD: PBT GF UL 94 V0
- JACK SCREW 4-40 UNC: STEEL; NICKEL PLATED
- SCREW FOR STRAIN RELIEF: STEEL; NICKEL PLATED
- COVER SCREW: STEEL; NICKEL PLATED
- STRAIN RELIEF: STEEL; NICKEL PLATED
- MALE CONNECTOR 7W2, WITHOUT CONTACTS

POS. 1

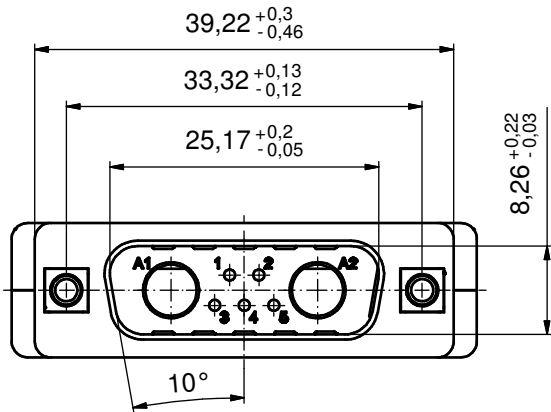

2x JACK SCREW 4-40 UNC
with cross recess and knurl

POS. 2



1x CABLE STRAIN RELIEF

POS. 3



2x COVER SCREW

POS. 4



2x CABLE STRAIN RELIEF SCREW

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1				
							material: SEE NOTES				
							date	name	title: PLASTIC HOOD with 7W2Male Crimp Connector straight cable exit		
							drawn 02.08.11	Henneboel			
							appd. 02.08.11	Fischer			
							norm				
			d-old		dwg no:		Inventor 10	DIN-A3			
a	Original					13K1A3734		sh: 1			
rev.	description	date	name			part no: 13-002760					