

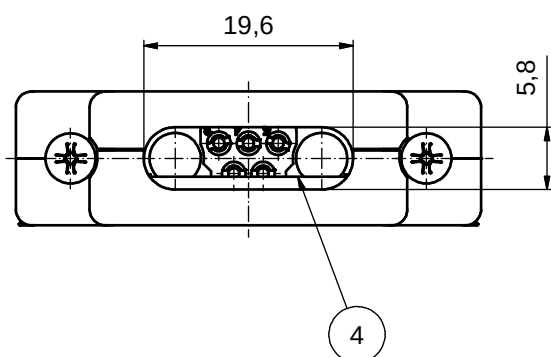
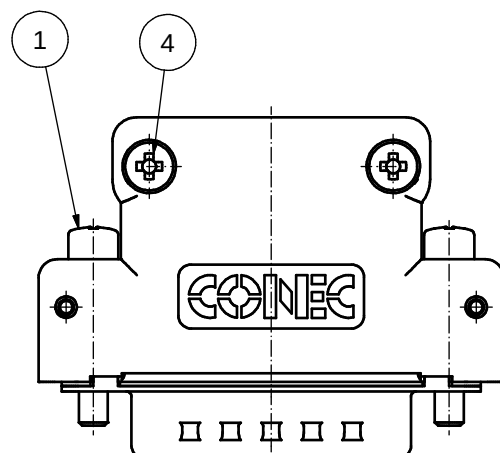
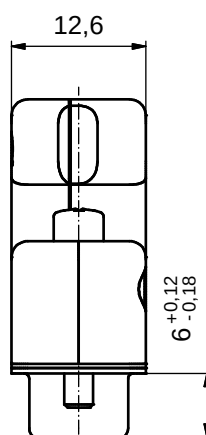
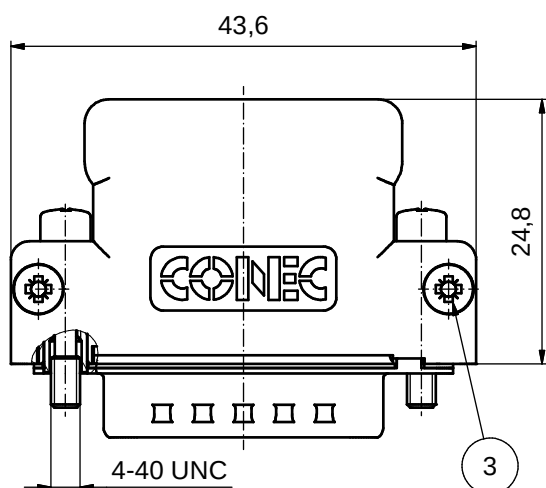
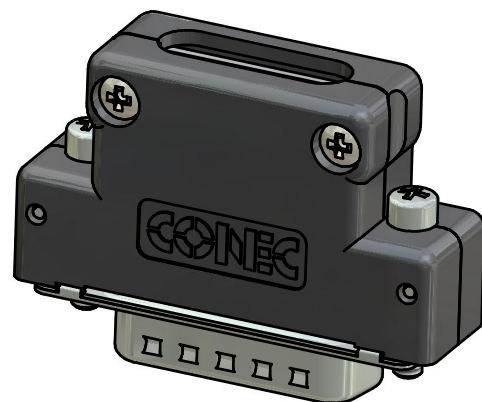


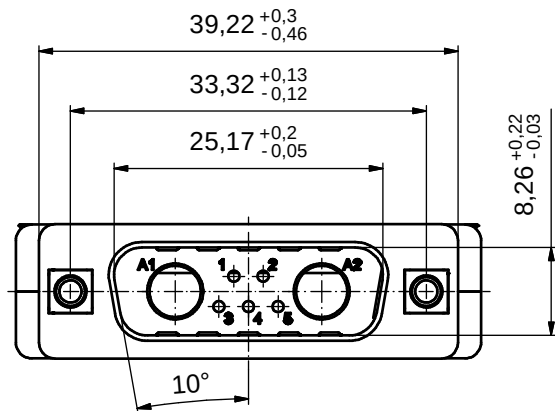


Directive 2002/95/EC
"RoHS"
Compliant

POS.1



2x SCREW 4-40 UNC
with cross recess

POS. 2



1x CABLE STRAIN RELIEF

POS. 3



2x COVER SCREW

POS. 4



2x CABLE STRAIN RELIEF SCREW

NOTES:

- HOOD: PBT GF UL 94 V0
- SCREW 4-40 UNC: STEEL; NICKEL PLATED
- SCREW FOR STRAIN RELIEF: STEEL; NICKEL PLATED
- COVER SCREW: STEEL; NICKEL PLATED
- STRAIN RELIEF: STEEL; NICKEL PLATED
- MALE CONNECTOR 7W2, WITHOUT CONTACTS

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	ISO 2768-m
dim. in mm	
drawn	24.06.2010 Henneboel
appd.	24.06.2010 Koch
norm	
d-old	

CONEC

scale:	2:1
material:	SEE NOTES
title:	PLASTIC HOOD with 7W2Male Crimp Connector straight cable exit
dwg no:	Inventor 10
part no:	13K1A3252
	13-002780

DIN-A3
sh: 1