



4

3

2

1

used for: D-SUB COMBINATION

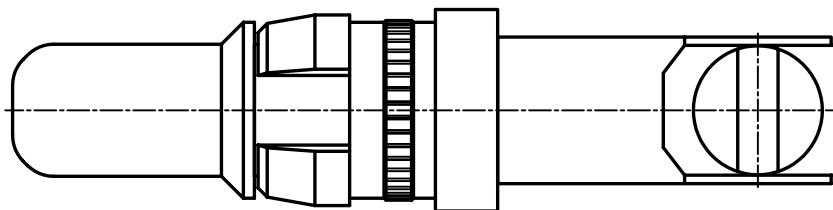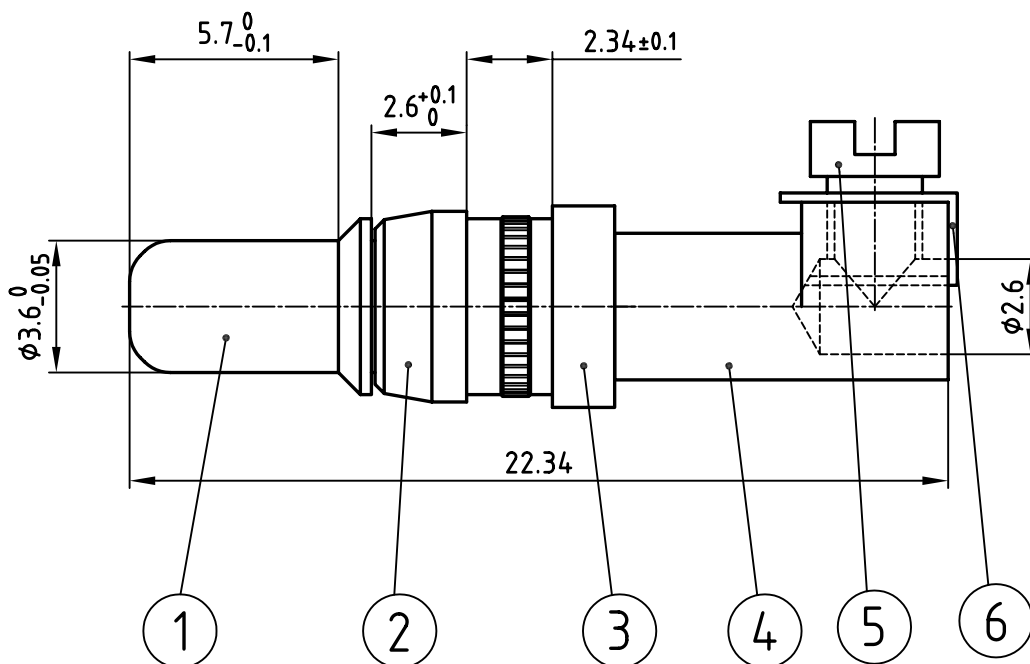

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: NICKEL PLATED

ITEM 3: NICKEL PLATED

ITEM 4: NICKEL PLATED

C ITEM 5: NICKEL PLATED

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				ISO 2768-m		
				2002	date	name
				drawn	08.03.	Schmidt
				appd.	08.03.	Mickenbecker
				norm		
				d-old		
1 x c	Ä 2304	01.09.2005	Lehmen			
1 x b	Ä 1564	08.07.2002	Schmidt			
rev.	description	date	name			

scale:	5:1	
material:	SEE NOTES	
title:	HIGH POWER CONTACT MALE Screw Termination for AWG 14, 20A D-SUB COMBINATION	
dwg no:	AutoCAD	DIN-A
	13K1A498	4
		sh: 1/1
part no:	131C36009X (b)	

4

3

2

1