


Stripping Dimensions/
Kabelvorbereitung:

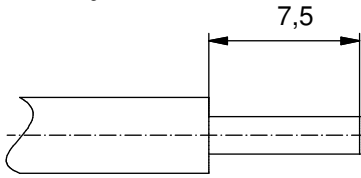

Materials/

Werkstoffe:

Cu alloy, Ni

Contact/

Kontakt:

Retaining ring/

Stainless Steel/

Haltering:

Edelstahl:

Installation specification/

Montagedaten:

Crimp-Tool/

360X10409X

Crimp-Werkzeug:

Tool insert/

360X20029X

Werkzeugeinsatz:



Selector Settings/

3 for AWG 16


Selektor Einstellungen:

2 for AWG 18

2 for AWG 20

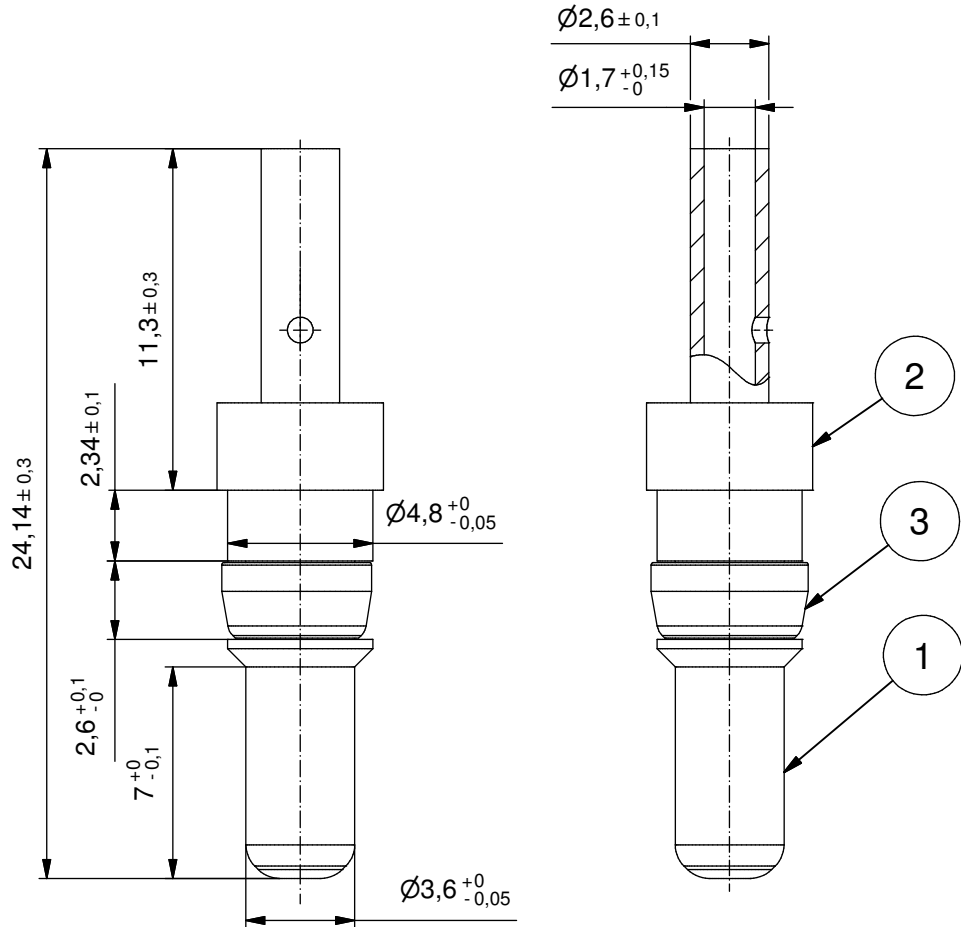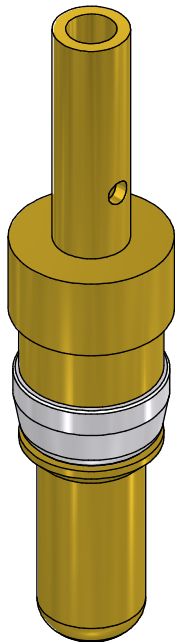

Part no. / Art.-Nr.:	Plating Pos. 1/ Veredelung Pos. 1:	Plating Pos. 2/ Veredelung Pos. 2:	Plating Pos. 3/ Veredelung Pos. 3:
131C11119X	min. 30 µm hard Gold over min. 50 µm Nickel min. 30 µm Gold über min. 50 µm Nickel	Gold over Nickel Gold über Nickel	Nickel plated/ vernickelt



dim. in mm

High power contact male
Crimp version 10 A premating solder pin

Hochstromkontaktstift

Crimp-Version 10 A Stiftkontakt voreilend

general tolerance/
Allgemeintoleranz:

ISO 2768-m

	Date/Datum	Name
drawn/ gez.	09.08.16	Henneboel
appd./ gepr.	09.08.16	Koch

CONEC®

dwg no /
Z.-nr.:

13K1A5263

DIN-
A4

Index:

scale/Maßstab:

Status: InBearbeitung

4:1

RoHS & REACH compliant/konform

1 / 1