
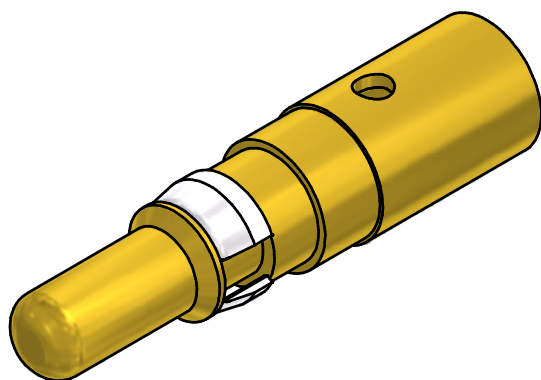
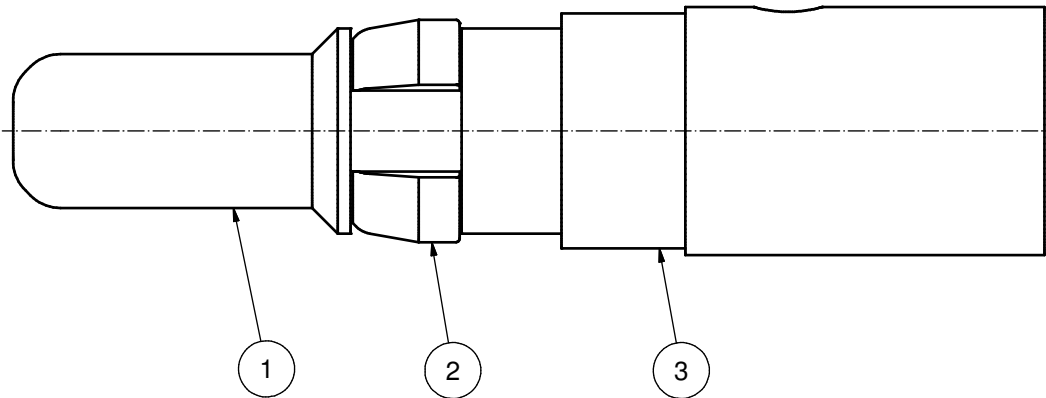


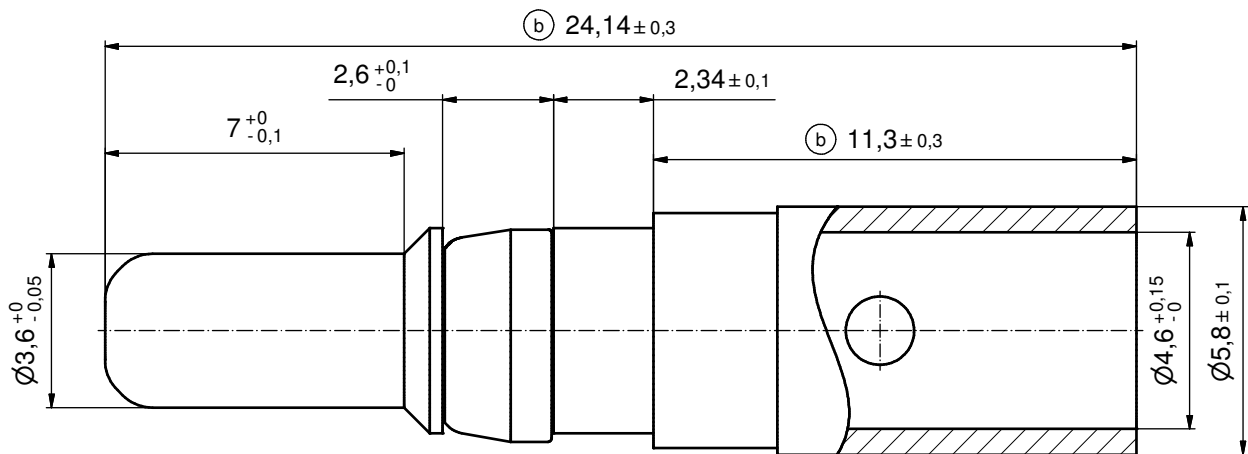


NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 36X20029X
 SELECTOR SETTINGS: 7 FOR AWG 8
 6 FOR AWG 10

(c)

plating	part no.
GOLD FLASH over NICKEL	131A11149X
30µin HARD GOLD over min. 50µin NICKEL	131C11149X

STRIPPING DIMENSIONS



3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL				
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED				
1	1	MATING SIDE	COPPER ALLOY	see table				
item	quantity	part description	material	plating				
partlist								
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND			tolerance		 dim. in mm	scale:	8:1	
			ISO 2768-m			material:	see partlist	
							title: HIGH POWER CONTACT MALE CRIMP VERSION 40A D-SUB COMBINATION	
					drawn	10.06.10		Schmidt
					appd.	10.06.10		Koch
					norm			
1 x c	Ä5113	28.02.2014	K.H.	d-old		dwg no:	DIN-A3	
2 x b	A4807	21.06.13	HS			13K1A3236	sh: 1	
a	Original							
rev.	description	date	name			part no:	see table	

CONEC®

Directive 2002/95/EC RoHS compliant