




PLUG CONTACT: **131J14519X**

(d) SHOULD BE USED FOR
D-SUB COMBINATION
MALE CONNECTORS

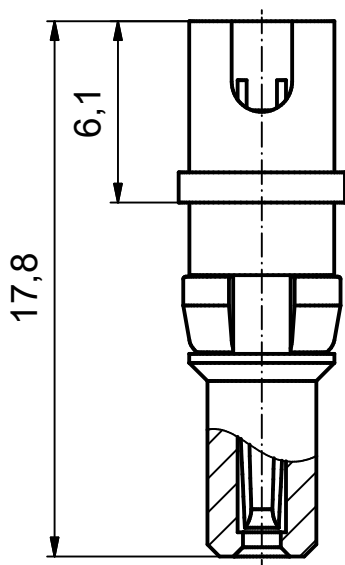


SOCKET CONTACT: **132J14519X**

(d) SHOULD BE USED FOR
D-SUB COMBINATION
FEMALE CONNECTORS

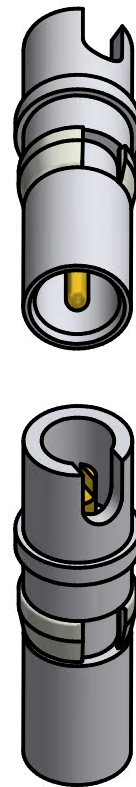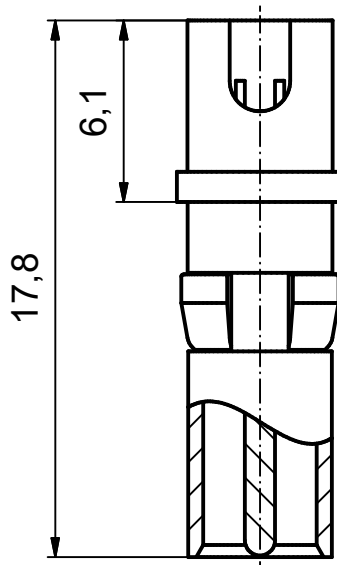


INSTALLATION DIMENSION

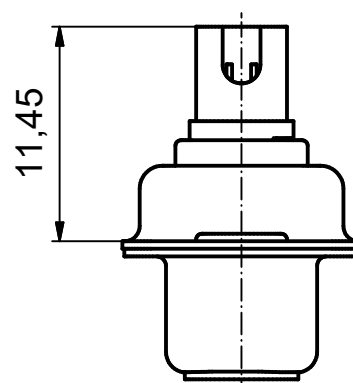

RoHS compliant

STRIPPING DIMENSIONS

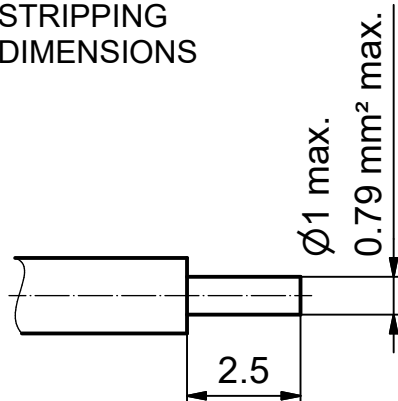

(d) (b)
(c)

NOTES:

1. INSULATOR:
PLUG CONTACT: PTFE, BLUE
SOCKET CONTACT: PTFE, WHITE
2. CONTACT: COPPER ALLOY,
PLATING CONTACT AREA:
50 µin HARD GOLD OVER NICKEL
3. SOLDER CUP ACCEPTS CABLE AWG 20
4. RETAINING RING: COPPER ALLOY, NICKEL PLATED
5. PLUG CONTACT MAY ONLY BE MOUNTED IN
D-SUB COMBINATION MALE CONNECTORS,
SOCKET CONTACT MAY ONLY BE MOUNTED IN
D-SUB COMBINATION FEMALE CONNECTORS

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
3 x d	Ä21-007	21.01.2021	JLE	norm		
1 x c	Ä3527	14.12.2009	Henneb.	d-old		
1 x b	Ä2434	01.02.2006	Lehmen,			
a	Original					
rev.	description	date	name			

CONEC®

scale:	4:1
material:	SEE NOTES
title:	
HIGH VOLTAGE PLUG + SOCKET CONTACT	
solder termination angled	
for D-SUB COMBINATION CONNECTORS	
dwg no:	13K1A569
part no:	SEE DRAWING
DIN-A4	sh: 1