



4

3

2

1

used for: D-SUB COMBINATION

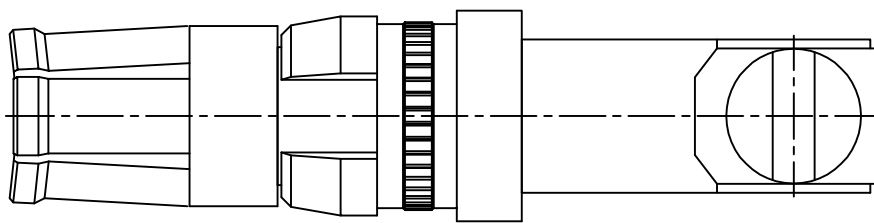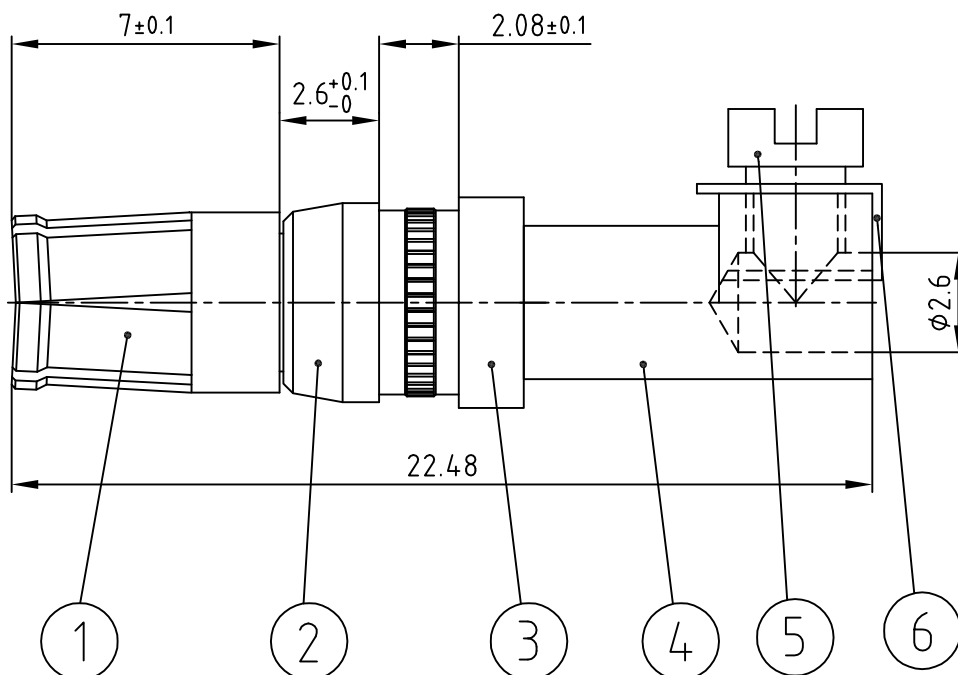

Plating item 1	Part-NO.
min. 30µ" HARD GOLD OVER min. 50µ" NICKEL	132C36009X
min. 50µ" HARD GOLD OVER min. 50µ" NICKEL	132J36009X

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: NICKEL PLATED

ITEM 3: NICKEL PLATED

ITEM 4: NICKEL PLATED


(b) ITEM 5: NICKEL PLATED

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				ISO 2768-m		
				2002	date	name
				drawn	01.07.	Schmidt
				appd.	01.07.	Mickenbecker
				norm		
				d-old		
						
1 x b	Ä 2304	01.09.2005	Lehmen.			
rev.	description	date	name			

scale: 5:1

material: SEE NOTES

title:

HIGH POWER CONTACT FEMALE

Screw Termination for AWG 14, 20A

D-SUB COMBINATION

dwg no: AutoCAD 2000 DIN-A

13K1A634 4

sh: 1/1

part no: SEE TABLE

4

3

2

1