

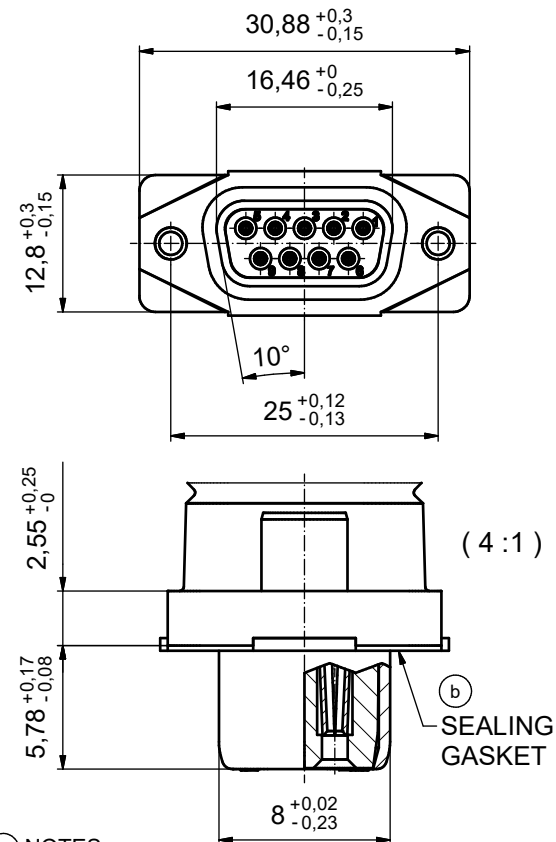


AT ALL TIMES WATER RESISTANT CONNECTORS NOT IN USE SHOULD BE COVERED WITH A CONEC WATER RESISTANT CAP OR WATER TIGHT HOOD.

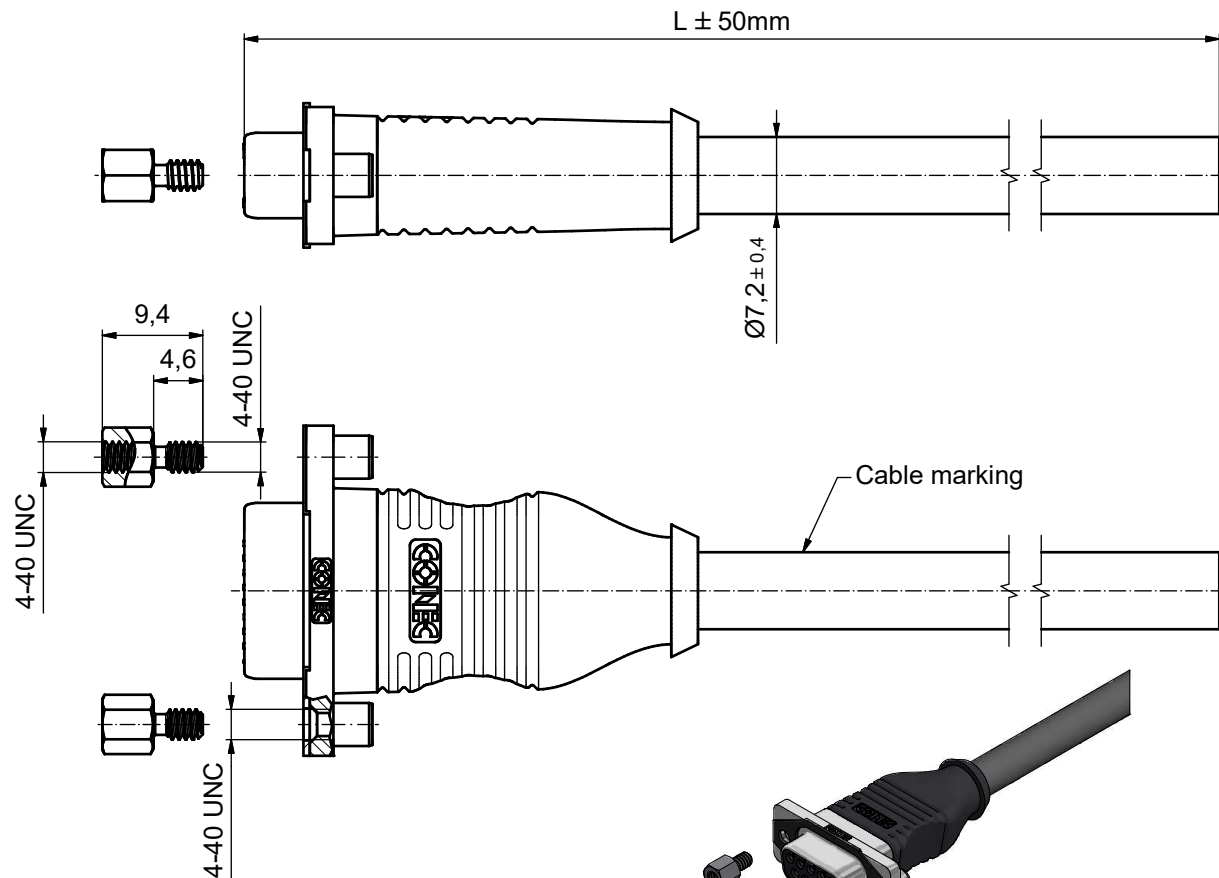

- NOTES:
1. IP RATING: IP 67
 2. METAL SHELL: ZINC DIE CAST;
min. 50µin NICKEL PLATING over COPPER
 3. INSULATORS: PBT GF UL 94 V-0
 4. SEALING COMPOUND: EPOXY
 5. CONTACTS: COPPER ALLOY; GOLD FLASH over NICKEL
 6. SEALING GASKET: SILICONE
 7. HEXLOCKING SCREWS: STAINLESS STEEL
 8. OVERMOLDING: TECHNOMELT
 9. RECOMMENDED TORQUE FOR MOUNTING SCREW
35Ncm (3.1 in.LB) / max.67Ncm (6 in.LB)
 10. CABLE MARKING: PART NO. CONEC DATE-CODE FA00XXXXXX

RECOMMENDED PANEL CUT-OUT

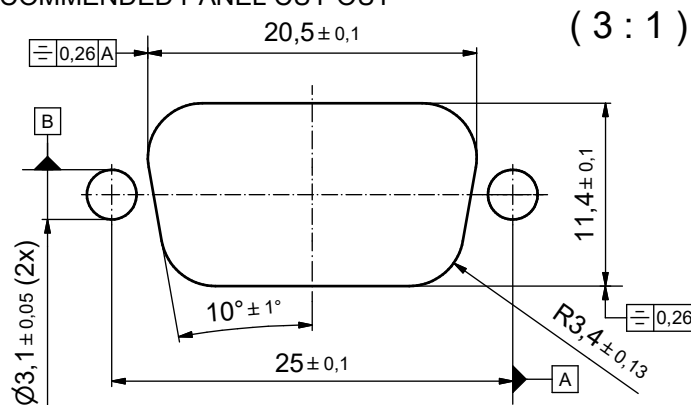

pin assignment:

- 1) white
- 2) brown
- 3) green
- 4) yellow
- 5) red
- 6) blue
- 7) grey
- 8) pink
- 9) -

RoHS compliant

part-no.:	length L:	cable:
15-007733	2m	
15-007743	4m	LiYCY (TP) 4x2x0,25mm² UL2464
15-007753	5m	cable: 781-GAQ280T
15-010313	7m	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance		scale:	1:1 (3:1) (4:1)
					date	name	material:	SEE NOTES
					drawn	19.02.2016	Heinrich	title: D-SUB FEMALE 9pos. MOLDED with closed 4-40 UNC thread
					appd.	26.02.2016	Fischer	
					norm			
c	Ä20-0437	08.02.2023	ABU		d-old		dwg no:	
2 x b	Ä6417	26.06.2017	Unkrüger					
a	Original							
rev.	description	date	name					

CONEC

15K1A1707

part no: SEE TABLE

DIN-A3
sh: 1