
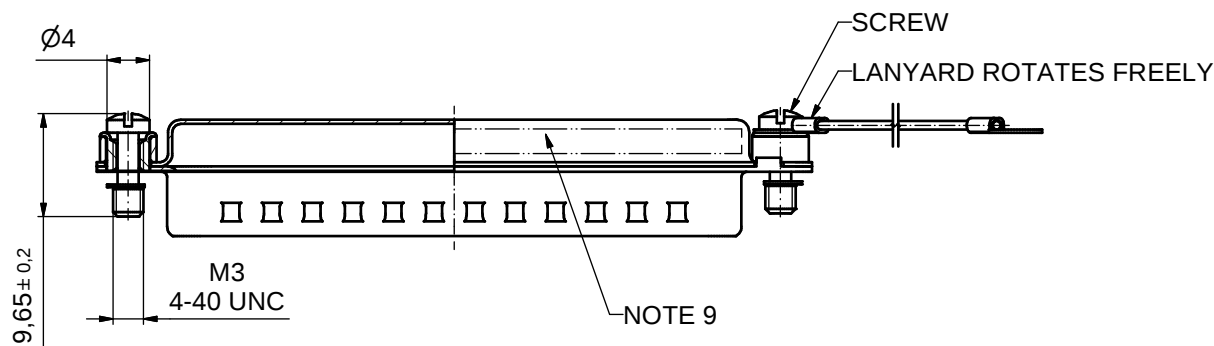
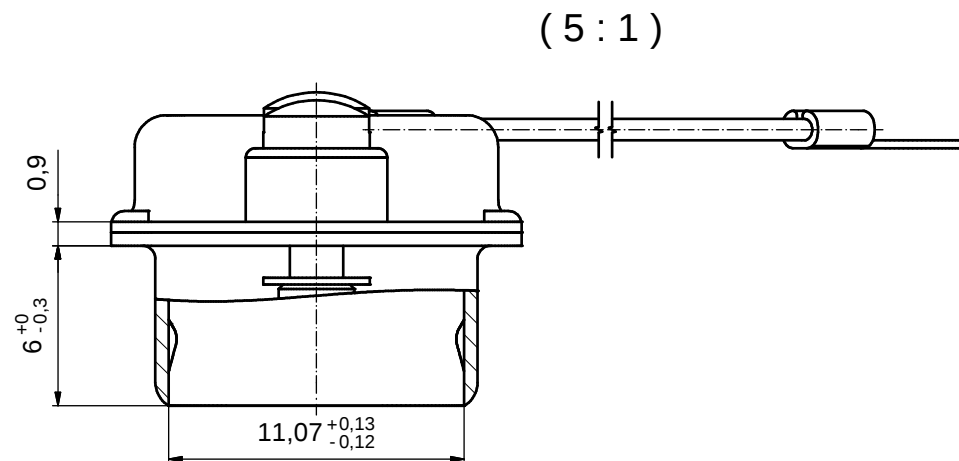
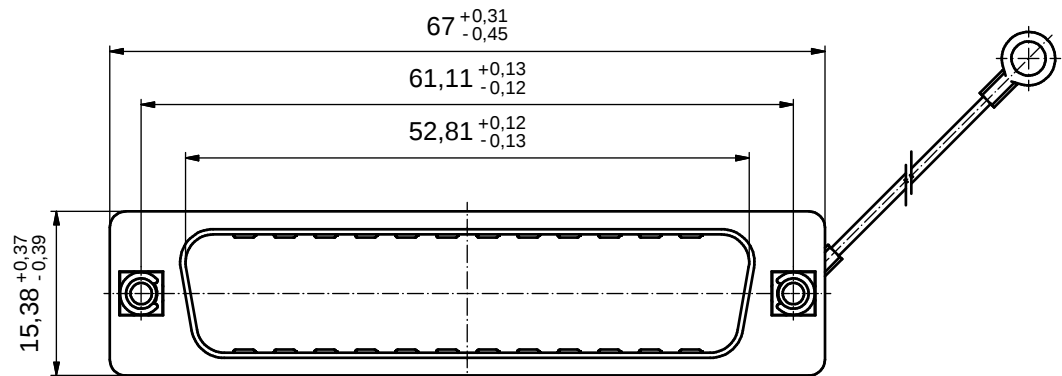


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
3. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
4. SCREW: STEEL; NICKEL PLATED
5. WIRE ROPE: STAINLESS STEEL 1.4401
6. RETAINING WASHER: STAINLESS STEEL 1.4122
7. TERMINAL RING: UNINSULATED, COPPER ALLOY; min. 200µinTIN over 80µin NICKEL
8. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
9. CONNECTOR IS PART MARKED: PART NO. CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance ISO 2768-m		 dim. in mm	scale: 2:1 (5:1)			
								material: SEE NOTES			
						date	name		title: SCREEN CAP 50pos. FOR SOCKET CONNECTOR with threaded insert, screw and wire rope		
						drawn	20.11.08	Petker			
						appd.	20.11.08	Fischer			
						norm					
						d-old		dwg no:			
								Inventor 10		DIN- A3 sh: 1	
	a	Origin						16K1A2403			
	rev.	description	date	name				part no:		see table	

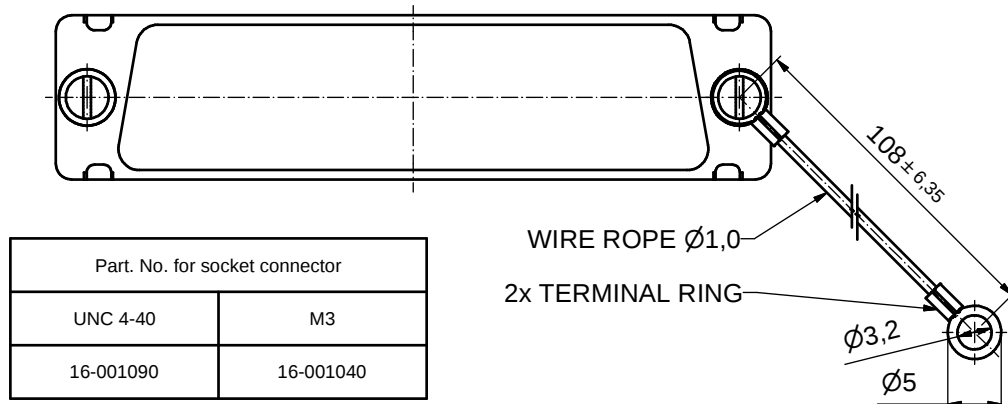

Part. No. for socket connector	
UNC 4-40	M3
16-001090	16-001040