
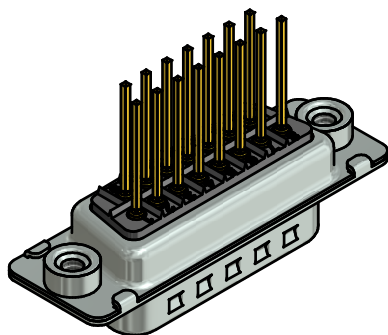

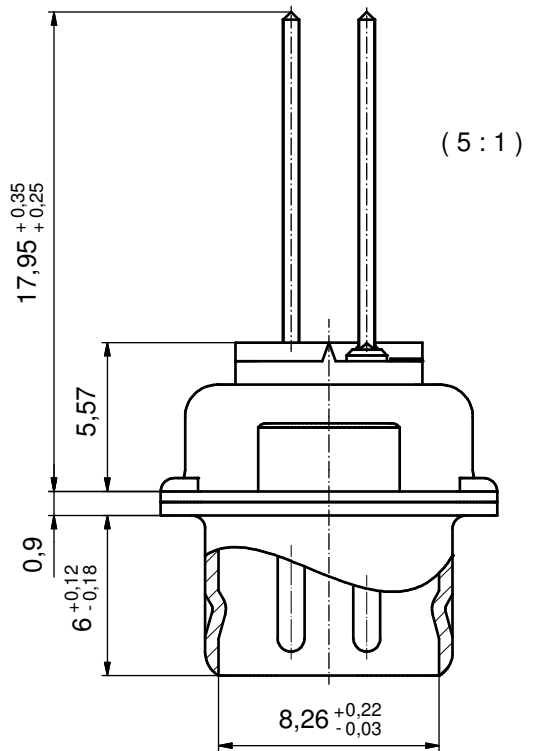
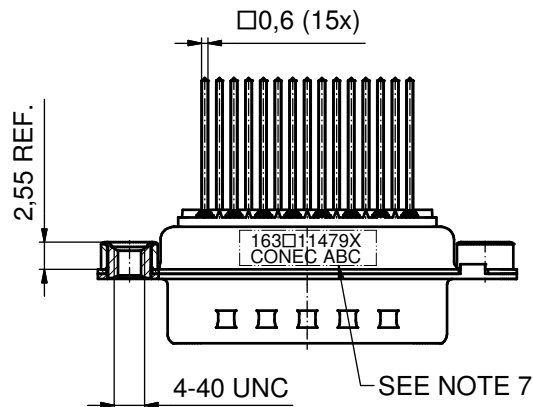


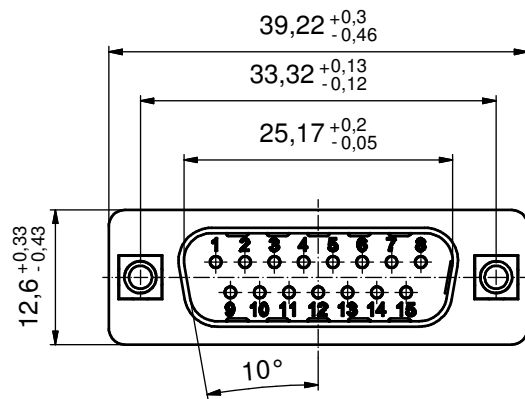

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
☐ PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
☐ PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
☐ PLEASE ADD J for 50µin HARD GOLD over min. 50µin NICKEL
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKET: 163□11479X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)						
							material: SEE NOTES						
									date	name	title: D-SUB MALE 15pos. WIRE WRAP with threaded insert		
								drawn	22.04.13	Henneboel			
								appd.	22.04.13	Fischer			
								norm					
								d-old					
											dwg no:		DIN-A3
				a	Original						16K1A3235		sh: 1
				rev.	description	date	name				part no: 163□11479X (see note 3)		