
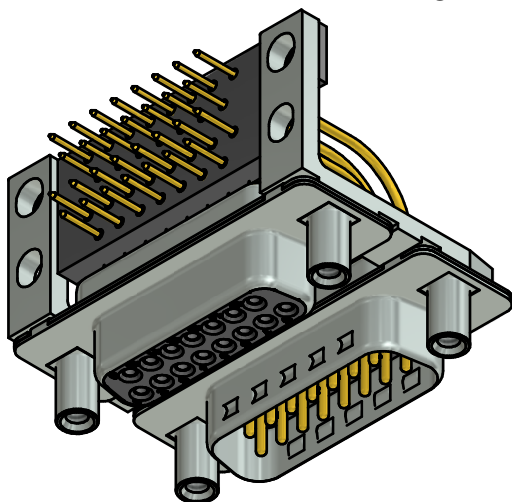
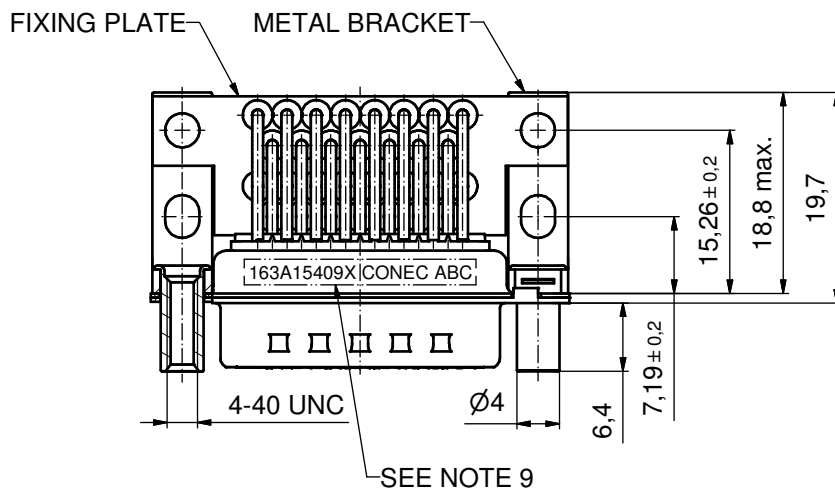
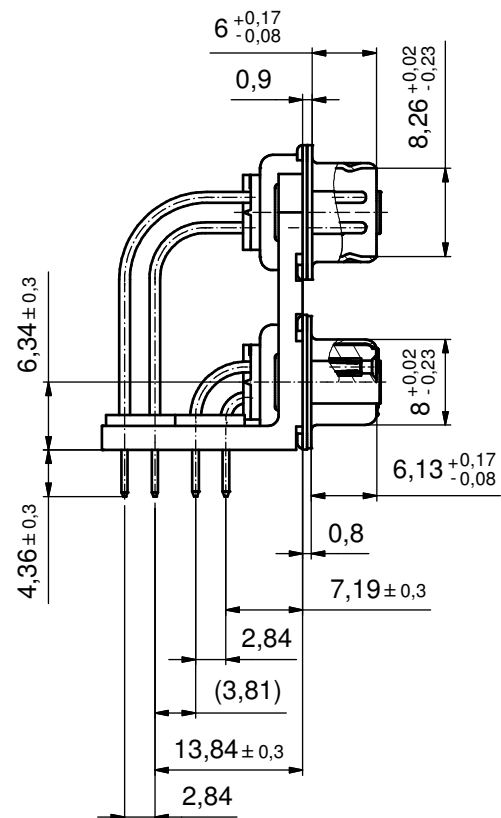


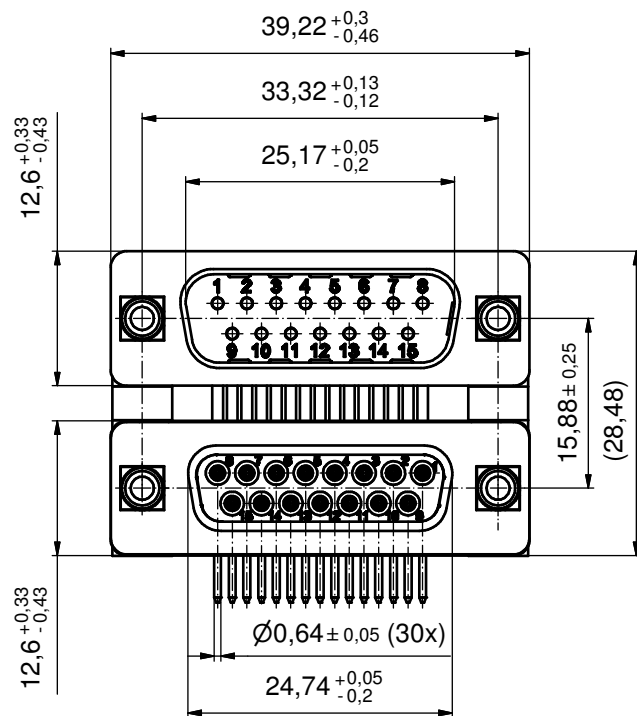

NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
- THREADED LOCKS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- FIXING PLATE: PBT GF UL 94 V-0, BLACK
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 163A15409X CONEC ABC


Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1			
							material: SEE NOTES			
							title:			
							D-SUB DUAL PORT 15,88mm			
							15pos. MALE / 15pos. FEMALE with threaded lock			
DO NOT ALTER CAD DRAWING BY HAND					date	name	dwg no:		Inventor 10	DIN-A3 sh: 1
					drawn	06.12.10	Henneboel			
					appd.	06.12.10	Fischer			
					norm					
					d-old					
						16K1A2748				
a	Origin									
rev.	description	date	name			part no: 163A15409X				

CONEC

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

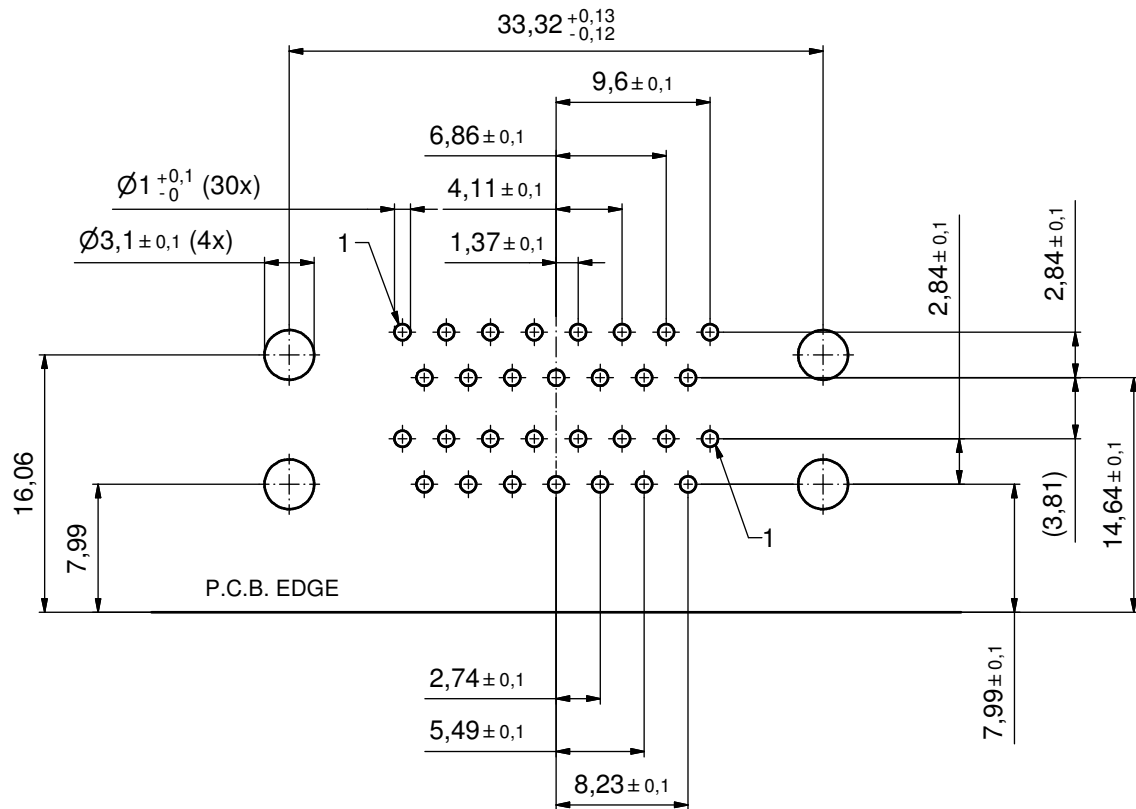

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1		
								material: SEE SHEET 1		
					date	name	title: P.C.B. HOLE DRILLINGS D-SUB DUAL PORT 15,88mm 15pos. MALE / 15pos. FEMALE			
					drawn 06.12.10	Henneboel				
					appd. 06.12.10	Fischer				
					norm					
					d-old		dwg no:		Inventor 10	DIN-A3
	a	Origin					16K1A2748		sh: 2	
	rev.	description	date	name			part no: SEE SHEET 1			