

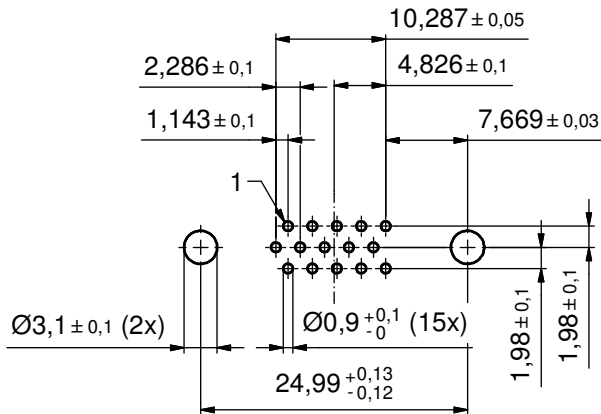

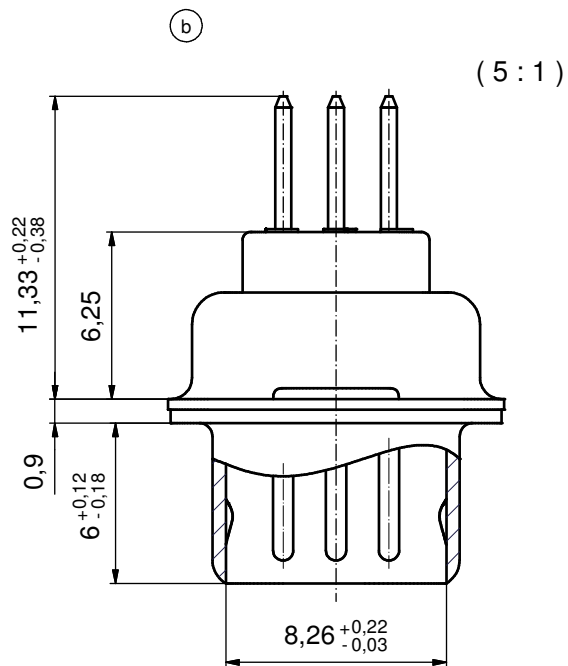


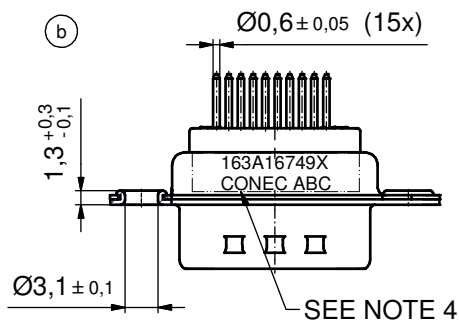


P.C.B. HOLE DRILLINGS
 (P.C.B. TOP SIDE)

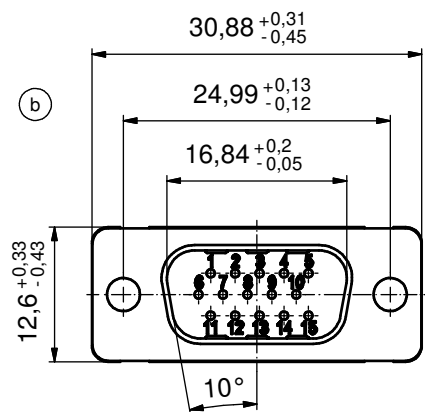

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY
 PLATING: GOLD FLASH over NICKEL
4. CONNECTOR IS PART MARKED: 163A16749X CONEC ABC



Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance			scale: 2:1 (5:1)					
				dim. in mm			material: SEE NOTES					
								date	name	title: D-SUB HD MALE 15pos. SOLDER PIN STRAIGHT		
								drawn 10.04.2002	Parei			
								appd. 10.04.2002	Mickenbecker			
				norm								
				d-old		dwg no:			DIN-A3			
4 x b	Ä4102	14.09.2011	K.H.			16K1A542			sh:1/6			
a	Original											
rev.	description	date	name			part no: 163A16749X						

DIN-A3
 sh: 1/6