
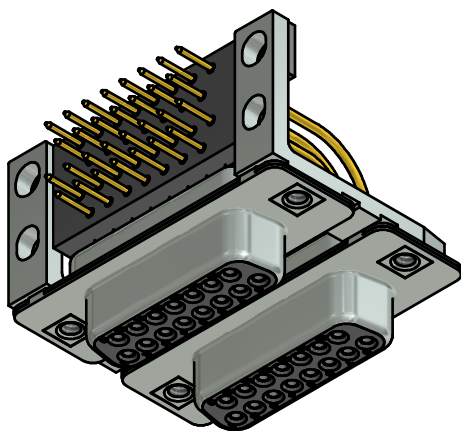
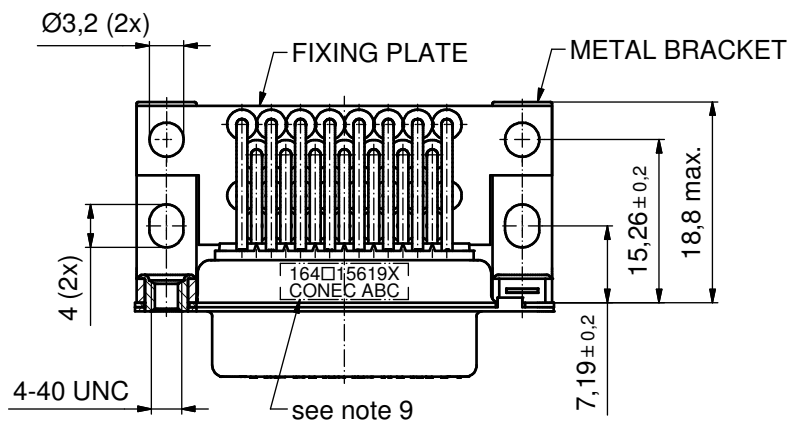
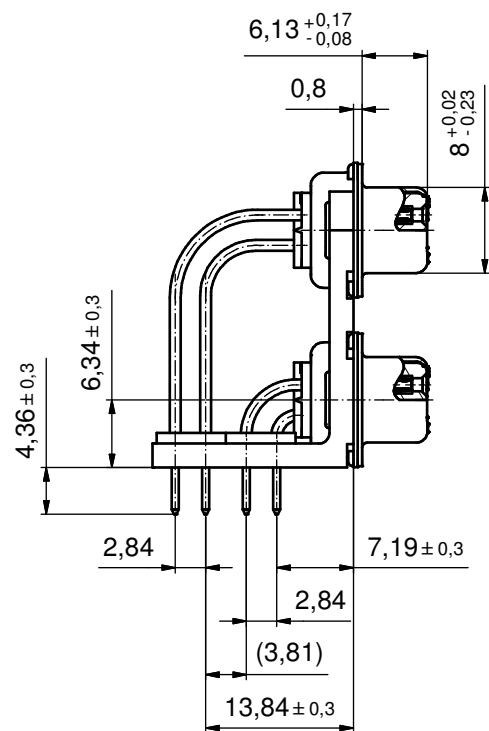


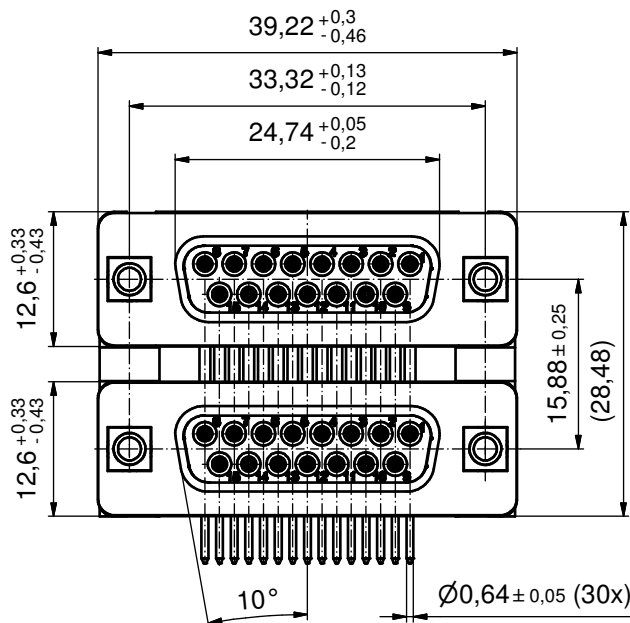


NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO):
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
☐ PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
☐ PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKETS:
 ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- FIXING PLATE: PBT GF UL 94 V-0, BLACK
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKET: 164□15619X CONEC ABC (see note 3)

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1		
								material: see notes		
					date	name	title: D-SUB DUAL PORT 15,88mm FEMALE / FEMALE 2x15pos. threaded insert, metal bracket, fixing plate			
					drawn	09.04.14				Henneboel
					appd.	10.04.14				Lehmenkühler
					norm					
					d-old					
								dwg no:		DIN-A3
	a	Original						16K1A3435		sh: 1/2
	rev.	description	date	name				part no: 164□15619X (see note 3)		

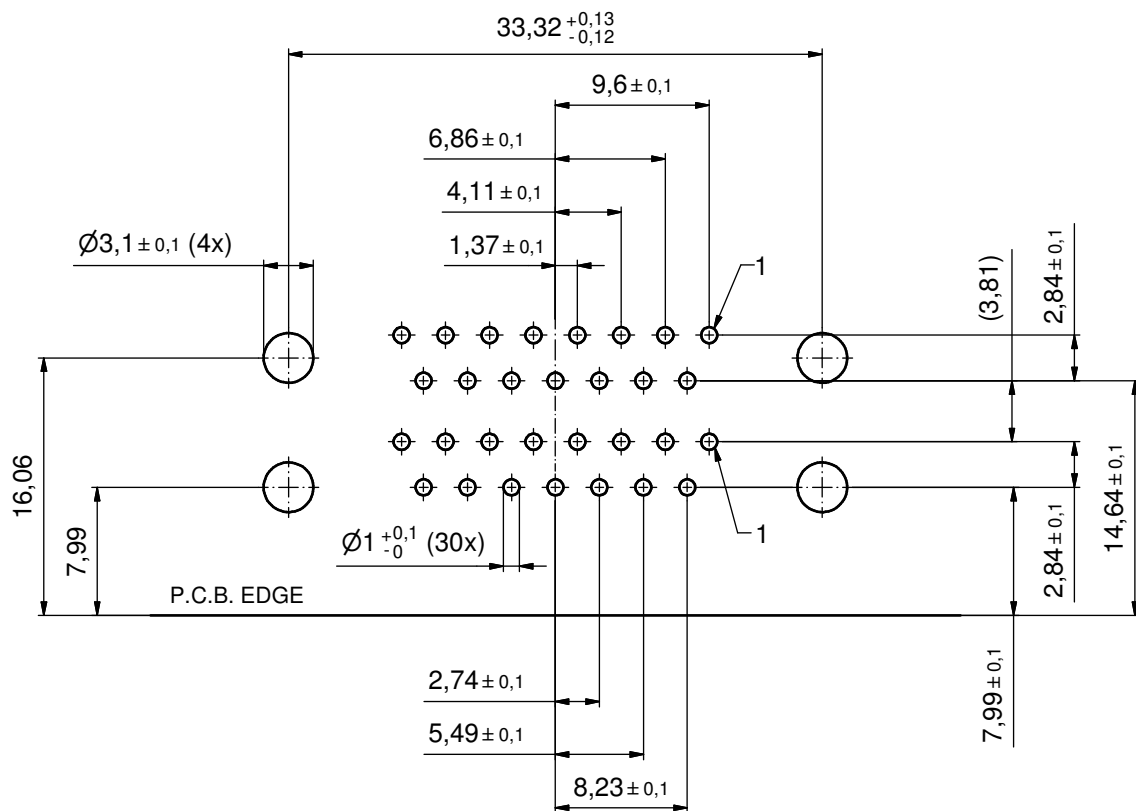

P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 3:1			
							material: see sheet 1				
					drawn	09.04.14	title: P.C.B. HOLE DRILLINGS D-SUB DUAL PORT 15,88mm FEMALE / FEMALE 2x15pos.				
					appd.	10.04.14				Lehmenkühler	
					norm						
					d-old						
								dwg no:		DIN-A3	
	a	Original						16K1A3435		sh: 2/2	
	rev.	description	date	name				part no: see sheet 1			

CONEC®