
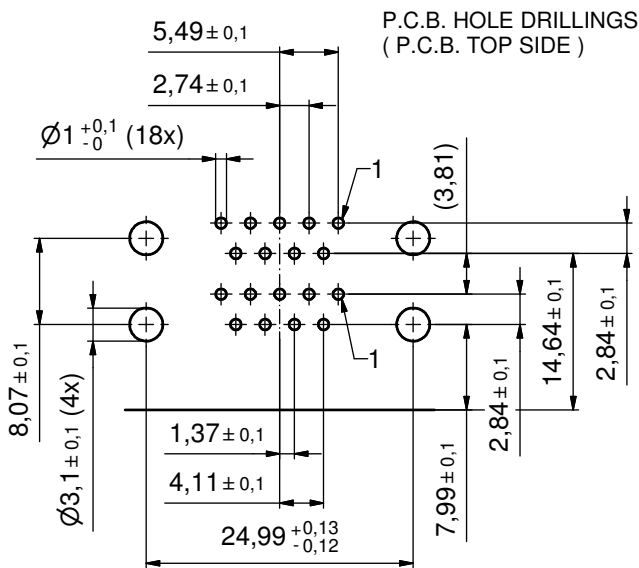
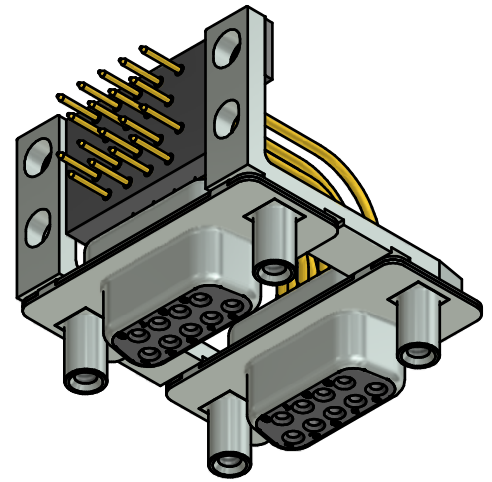
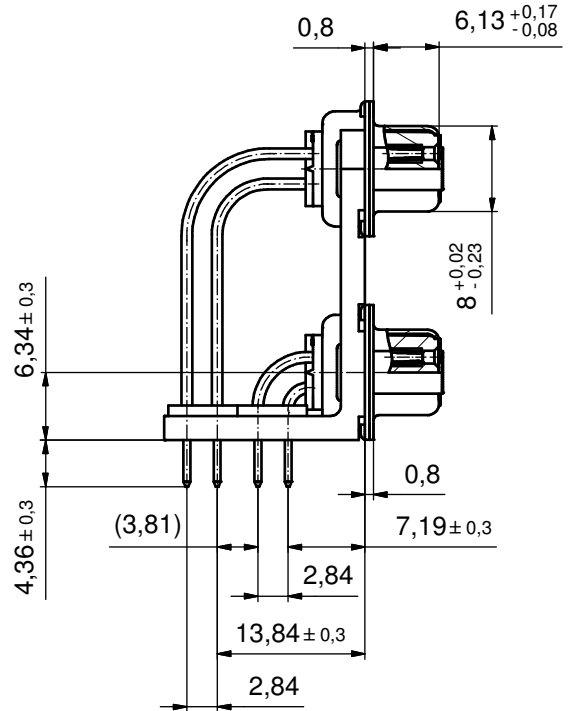
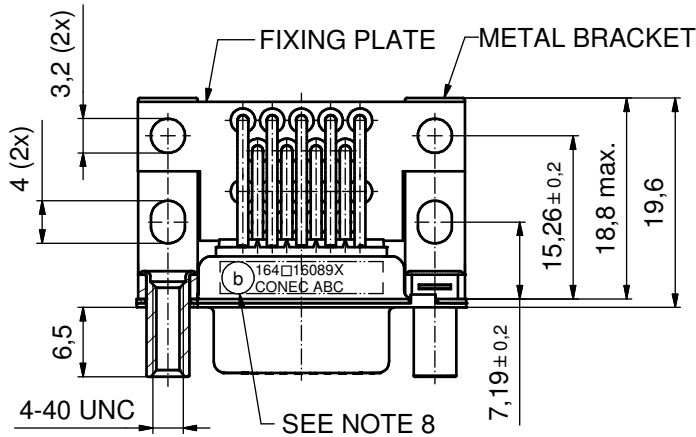


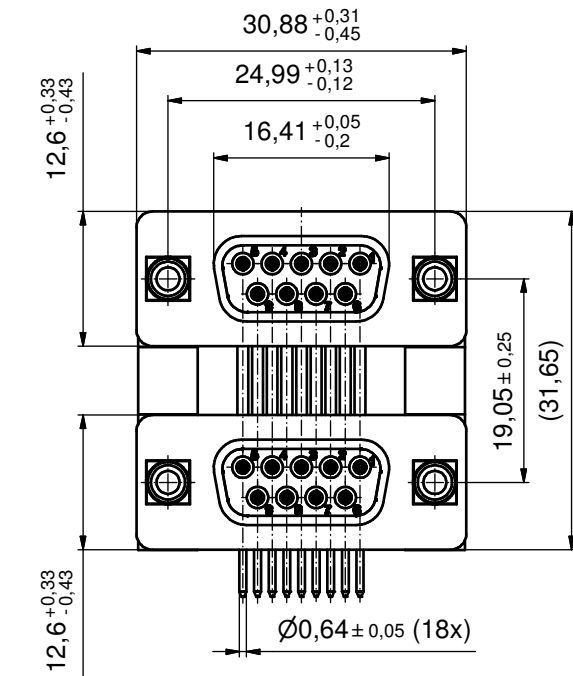

NOTES:

- METAL SHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
 (b) □ PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
 □ PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 □ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
- METAL BRACKETS:
 ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- THREADED LOCKS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- FIXING PLATE: PBT GF UL 94 V-0, BLACK
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 164□16089X CONEC ABC (see note 3)

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

3 x b	Ä4416	09.08.2012	K.H.
a	Original		
rev.	description	date	name

tolerance	dim. in mm
date	name
drawn 21.04.11	Henneboel
appd. 21.04.11	Fischer
norm	
d-old	16K1A638

scale:	2:1
material:	SEE NOTES
title:	D-SUB DUAL PORT 19,05mm FEMALE / FEMALE 2x9pos. with threaded lock and snap
dwg no:	16K1A2818
DIN-A3	sh: 1
part no:	(b) 164□16089X (see note 3)