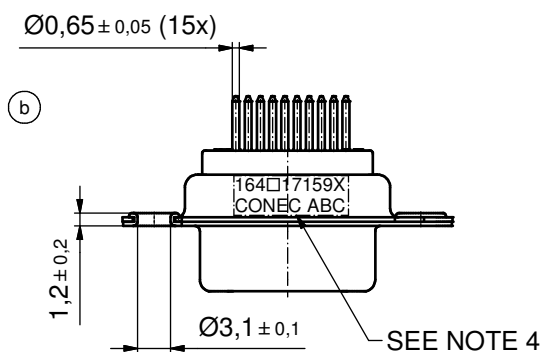
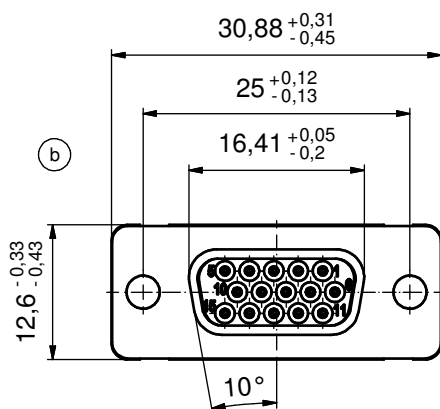
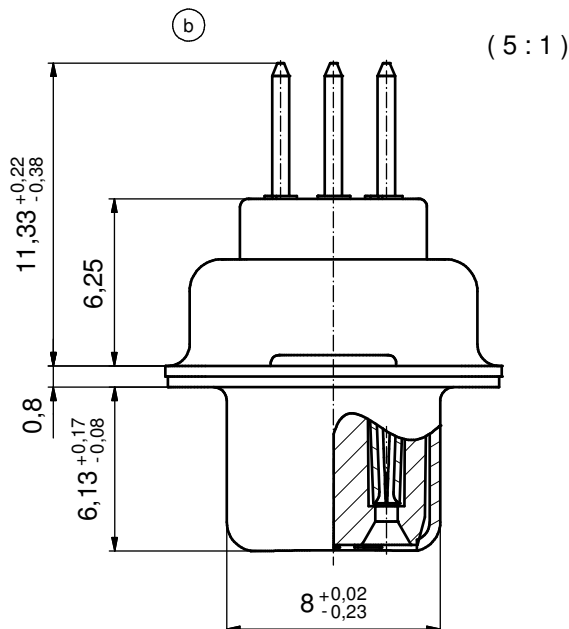
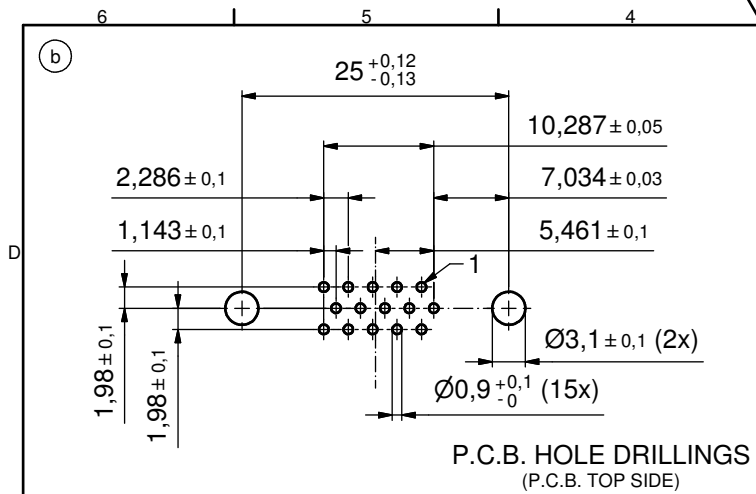


(b) NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0; BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 - PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- CONNECTOR IS PART MARKED: **164□17159X CONEC ABC** (see note 3)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)				
							material: SEE NOTES				
				DO NOT ALTER CAD DRAWING BY HAND				date		title: D-SUB HD FEMALE 15pos. SOLDER PIN STRAIGHT	
								name			
drawn 15.03.02		Schmidt									
appd. 15.03.02		Mickenbecker									
				norm							
				d-old		16K11X2A					
6 x b		Ã5160		21.07.2014		K.H.		CONEC®			
a		Original									
rev.		description		date		name					

Directive 2002/95/EC RoHS compliant