

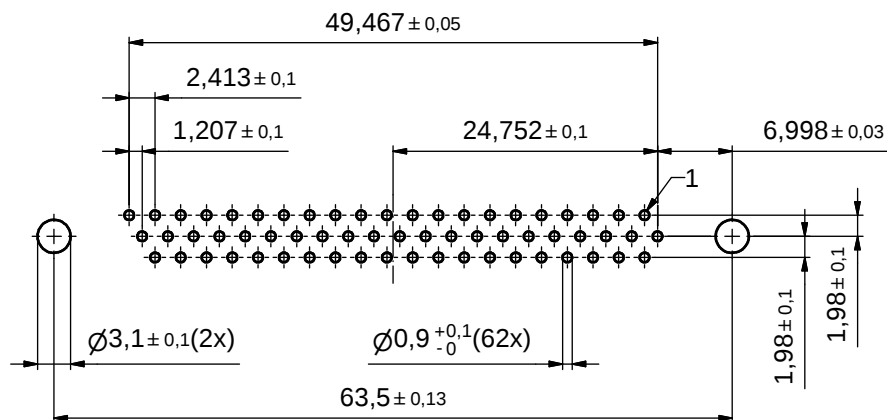
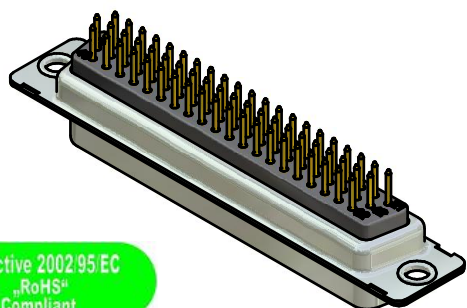


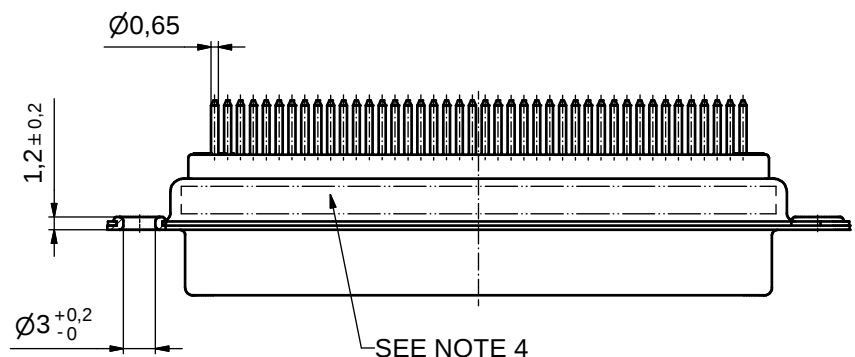



P.C.B. HOLE DRILLINGS

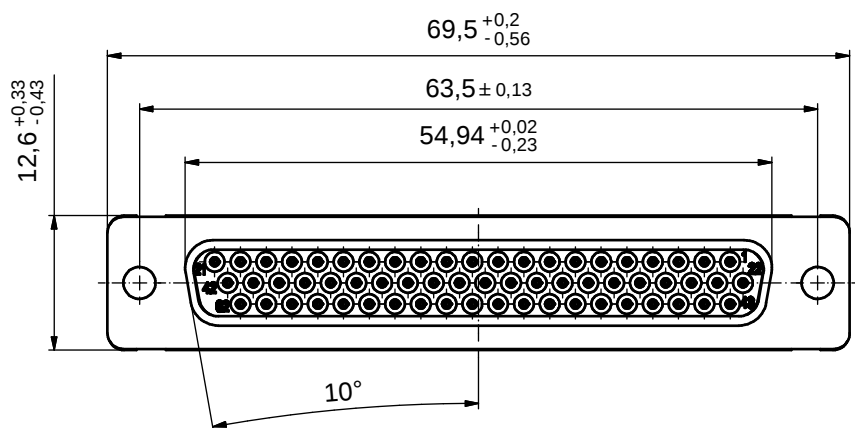

Directive 2002/95/EC
"RoHS"
Compliant

NOTES:

- METALSHELLS: STEEL; min. $315\mu\text{in}$ TIN OVER $40-80\mu\text{in}$ NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: $8\mu\text{in}$ HARD GOLD OVER min. $50\mu\text{in}$ NICKEL
- CONNECTOR IS PART MARKED: 164A17189X CONEC ABC

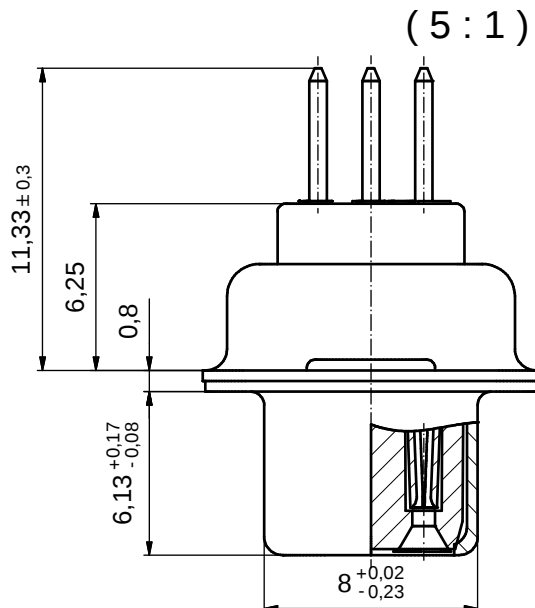

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
drawn	28.08.08
appd.	28.08.08
norm	
d-old	

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB HD Female 62pos. SOLDER PIN STRAIGHT	
dwg no:	Inventor 10
16K1A2351	
part no:	164A17189X

CONEC