

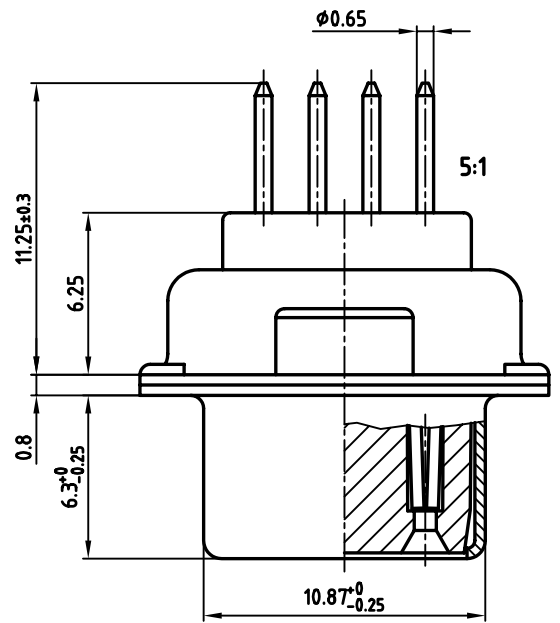
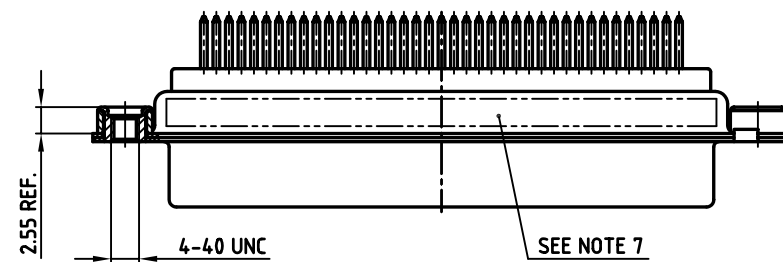



NOTES:

1. METAL SHELLS: STEEL; min. 315µin TIN over 40-80pin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD OVER min. 50µin NICKEL
4. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
5. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: **164A17249X CONEC ABC**

used for: D-SUB HD

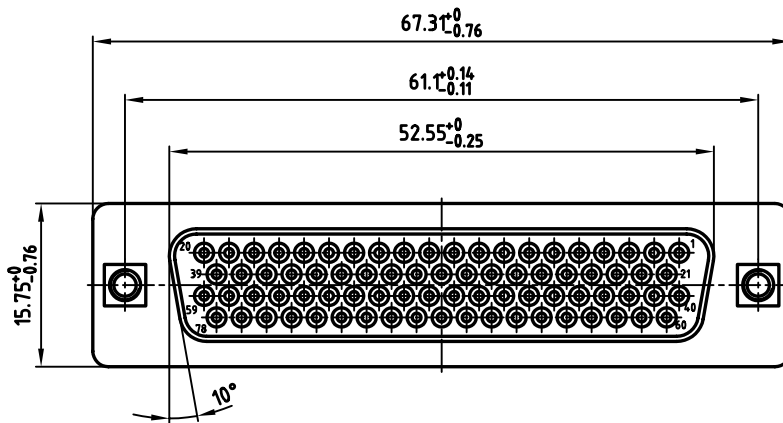

P.C.B. HOLE DRILLINGS

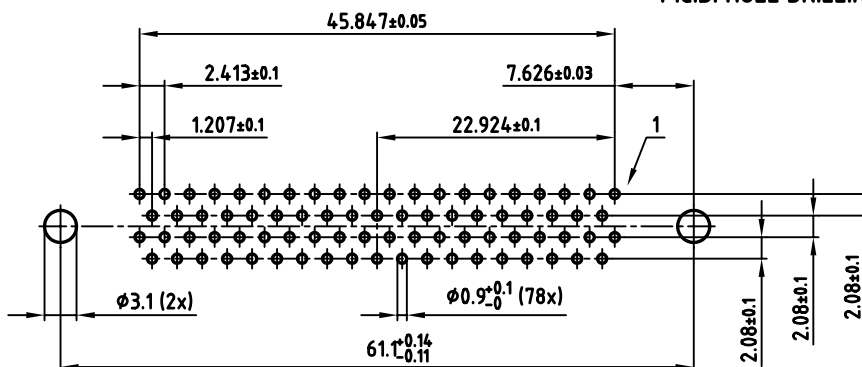

Directive 2002/95 EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	12.10.
appd.	12.10.
norm	DIN 41652
d-old	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB HD FEMALE	
78pos. SOLDER PIN STRAIGHT	
with threaded insert	
dwg no:	AutoCAD 2006
16K1A1913	
part no:	164A17249X

CONEC