
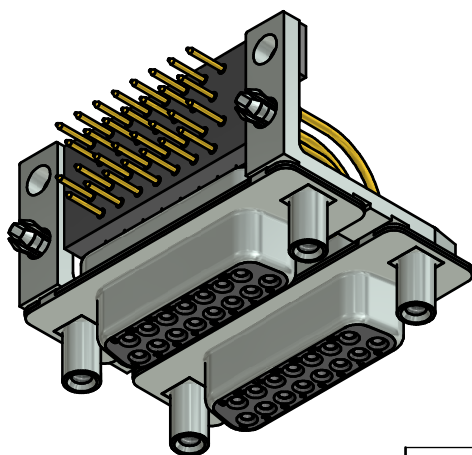
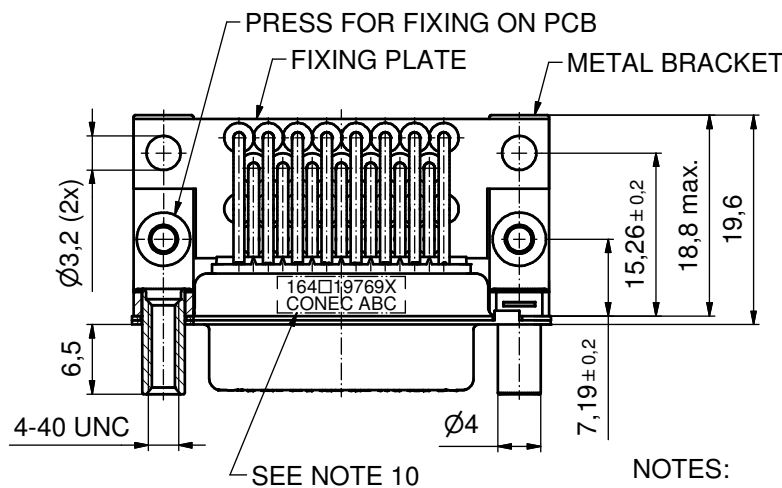
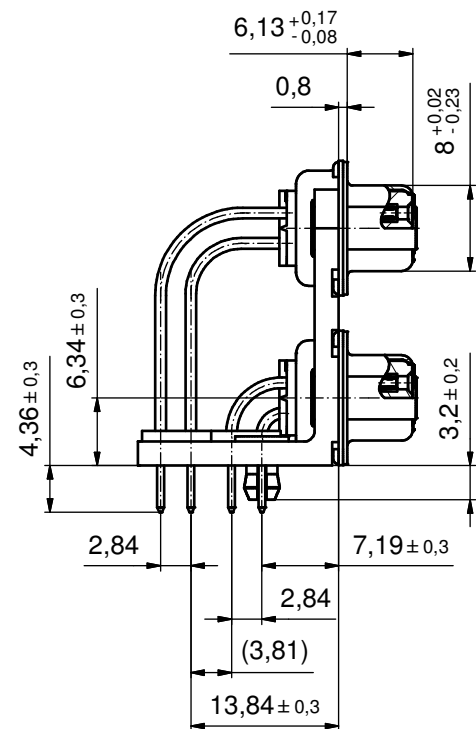


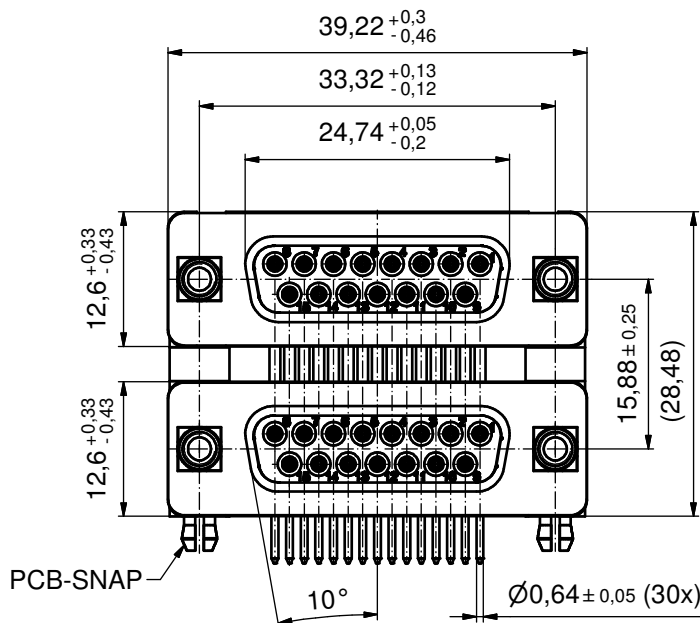

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
☐ PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
☐ PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKETS:
 ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- FRONT SPACERS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- FIXING PLATE: PBT GF UL 94 V-0, BLACK
- PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
 PCB HOLE: Ø3,1±0,1mm; PCB-THICKNESS: 1,6mm
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKET: 164□19769X CONEC ABC (see note 3)

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
rev.	description	date	name	date	name		
a	Original			drawn 25.09.15	Henneboel		
				appd. 25.09.15	Lehmenkühler		
				norm			
				d-old			
				CONEC			

scale: 2:1	
material: see notes	
title: D-SUB DUAL PORT 15,88mm FEMALE / FEMALE 2x15pos. with PCB-snap and front spacer	
dwg no:	DIN-A3
16K1A3715	sh: 1/2
part no: 164□19769X (see note 3)	



THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 3:1	
							material: see sheet 1	
					date	name	title: P.C.B. HOLE DRILLINGS D-SUB DUAL PORT 15,88mm FEMALE / FEMALE 2x15pos.	
					drawn 25.09.15	Henneboel		
					appd. 25.09.15	Lehmenkühler		
					norm			
					d-old		dwg no: 16K1A3715 DIN-A3 sh: 2/2	
								
	a	Original						
	rev.	description	date	name			part no: see sheet 1	