



CABLE STRAIN RELIEF (1x)

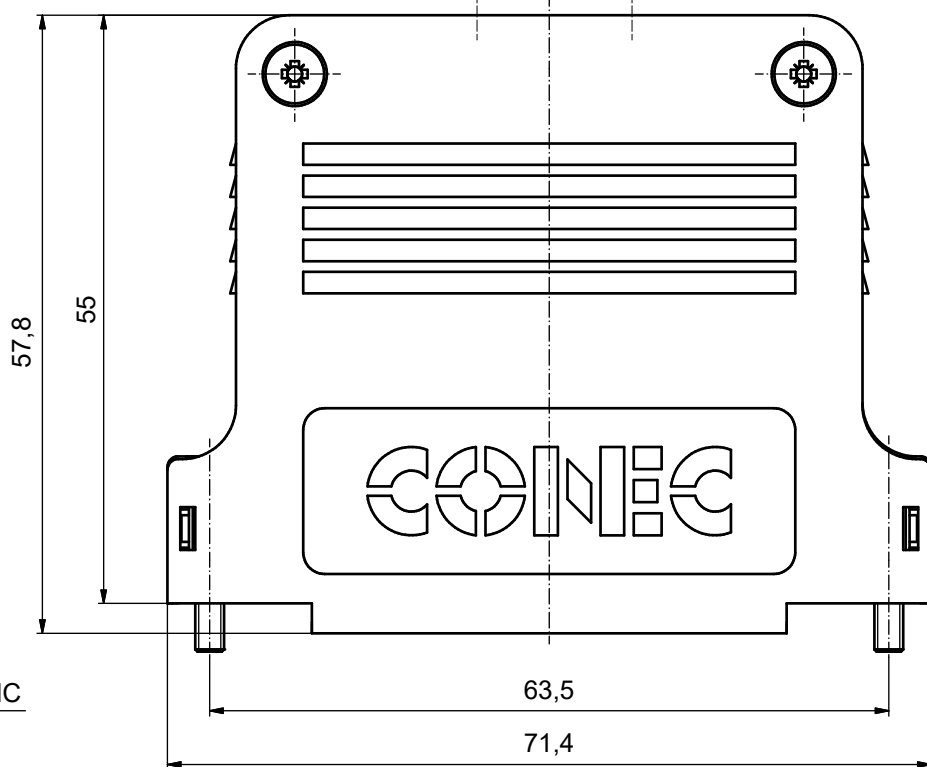


LENS HEAD SCREW (2x)

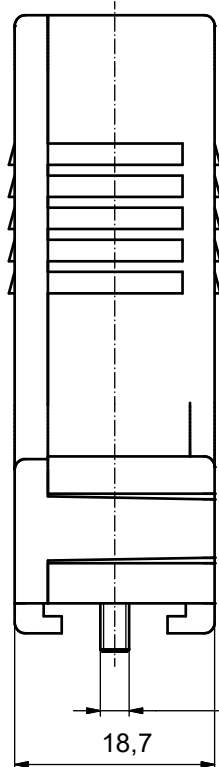


SHORT SCREW (2x)



PRESS INSERT (1x)



COVER SCREW (2x)

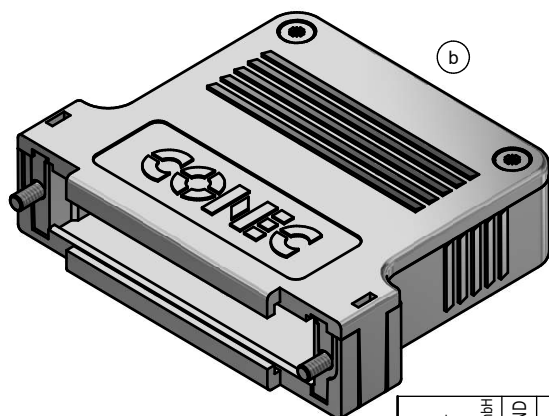

NOTES:

1. HOOD + COVER: ABS UL 94 V-0; METALLIZED
2. CABLE STRAIN RELIEF: STEEL; NICKEL PLATED
3. PRESS INSERT: ABS UL 94 V-0; METALLIZED
4. SHORT SCREWS: BRASS; NICKEL PLATED
5. COVER SCREWS: STEEL; NICKEL PLATED
6. LENS HEAD SCREWS: STEEL; NICKEL PLATED

TECHNICAL DATA:

- TEMPERATURE RANGE: - 33°C to + 90°C

ROHS compliant, exemption 6c/
ROHS konform, Ausnahme 6c

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm	
				date	name		
				drawn 03.09.2014	Unkrüer		
				appd. 03.09.2014	Lehmenkühler		
				norm			
1 x c	Ä21-0233	06.06.2024	JLE	d-old	16K2A171A		
3 x b	Ä 5304	03.09.2014	Unkrüer				
a	Original						
rev.	description	date	name				

CONEC

scale:	2:1
material:	SEE NOTES
title:	
PLASTIC HOOD	
37pos.	
with straight cable exit	
dwg no:	
part no:	165X13499X
dwg no:	16K1A3496
DIN-A3	sh: 1