


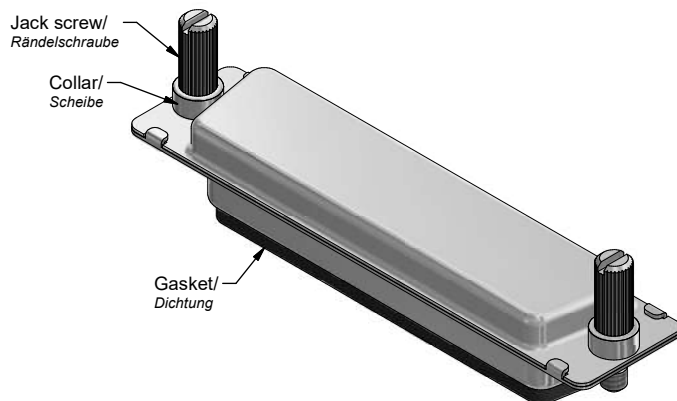

Materials/




Werkstoffe:

Shell/ Gehäuse:	Cu alloy, Sn over Ni
Gasket/ Dichtung:	TPE
Threaded insert/ Gewindeeinsatz:	Cu alloy, Sn over Ni
Collar/ Scheibe:	Cu alloy, Sn over Ni
Screw/ Schraube:	Steel, Ni/ Stahl, Ni

Installation specification/

Montagedaten:

Recommended torque value for thread/ Empfohlenes Drehmoment für Gewinde:	max. 6 in.LB/ max. 67 Ncm
---	------------------------------

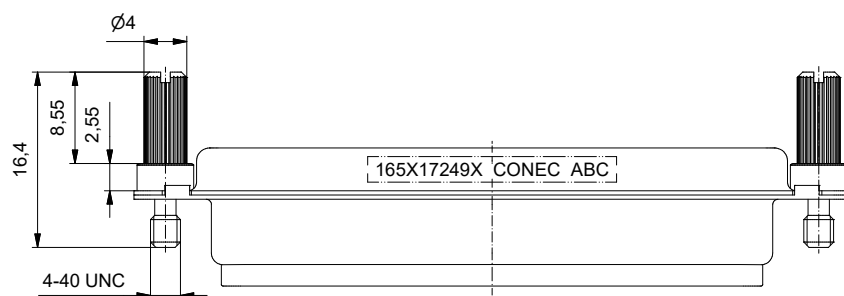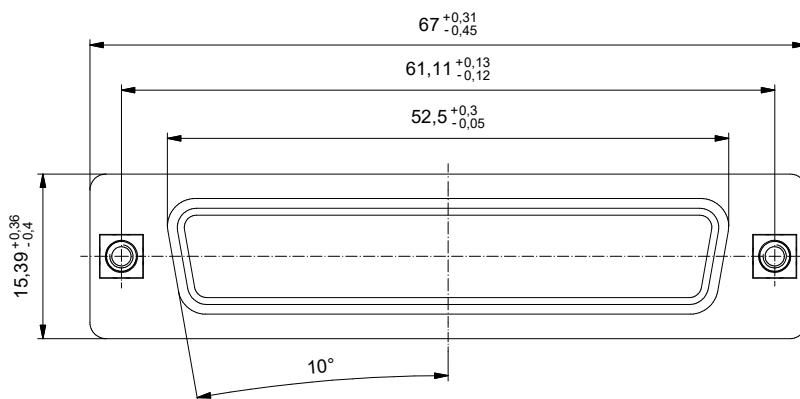

Part no. / Part marked/
Art.-Nr. / Bedruckung:

165X17249X

		dim. in mm		IP67 D-SUB Protection cap 50pos. with gasket for EMI/RFI protection - with jack screw	
		drawn/ gez.	Date/Date	Name	IP67 D-SUB Schutzkappe 50pol. mit Dichtung zum Schutz vor EMI/RFI - mit Rändelschraube
		appd./ gepr.	14.02.2020	Lehmenkühler	
			17.02.2020	Schmidt	
Index: a Original	scale/ Maßstab: 2:1	CONEC			dwg no / Z.-nr.: 16K1A4191
Status: Freigegeben					DIN-A3
RoHS compliant/ konform					1 / 1