
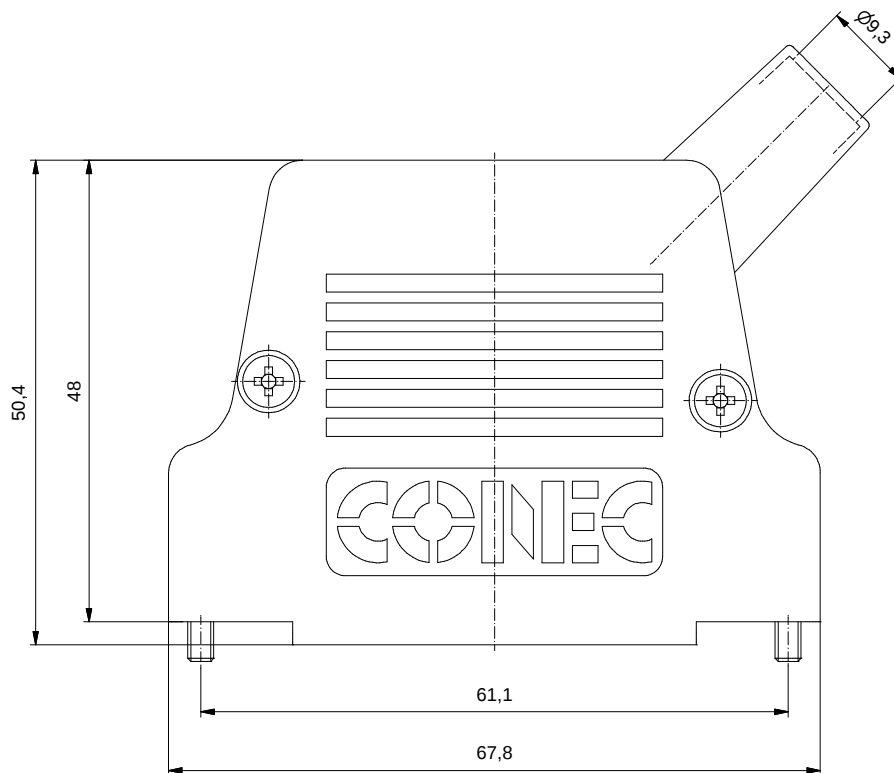
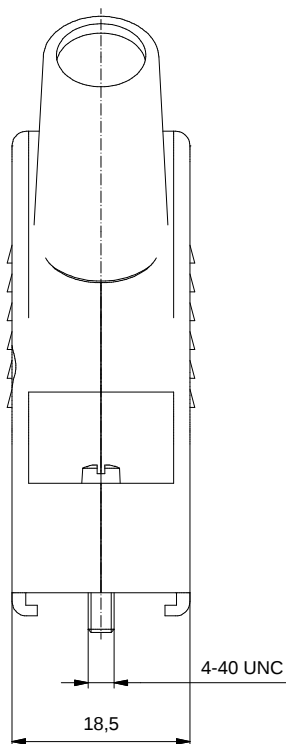
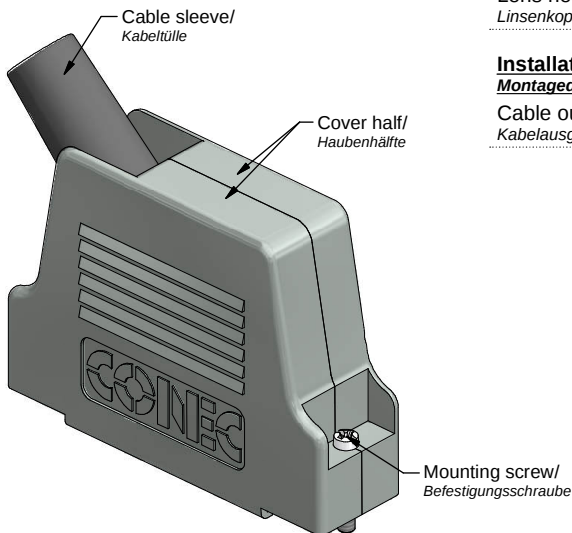


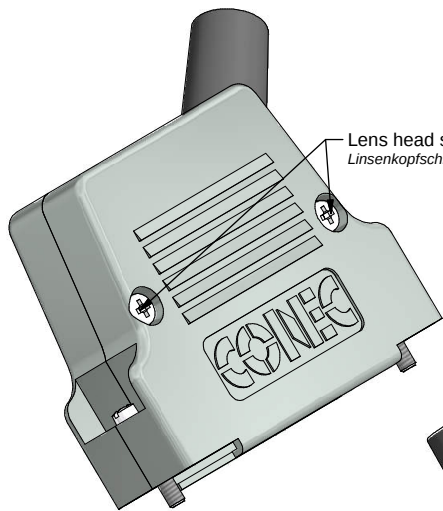

b) Technical specification:

Technische Daten:

Temperature range/ - 35 °C ... + 90 °C
Temperaturbereich:

Materials/ Werkstoffe:

Cover half/
Haubenhälfte: GD-Zn, Ni

Cable strain relief/
Kabel Zugentlastung: Steel, Ni

Cable sleeve/
Kabeltülle: Rubber

Mounting screw/
Befestigungsschraube: Steel, Ni

Lens head screw/
Linsenkopfschraube: Steel, Ni

Installation specification/ Montagedaten:

Cable outlet/
Kabelausgang: side/Seite

Part no./
Art.-Nr.

165X17599X

				dim. in mm		Full metal hood 50pos. with side cable exit Vollmetallhaube 50pol. mit seitlichem Kabelausgang	
		drawn/ gez. appd./ gepr.	Date/Datum 16.04.2018	Name Unkrüer			
			17.04.2018	Schmidt			
Index: b Ä7223 16.04.18 L.U.	scale/Maßstab: 2:1			dwg no / Z.-nr.: 16K1A4046		DIN- A3	
Status: InBearbeitung							
RoHS compliant/ konform						1 / 1	