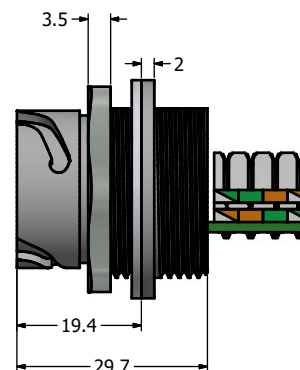
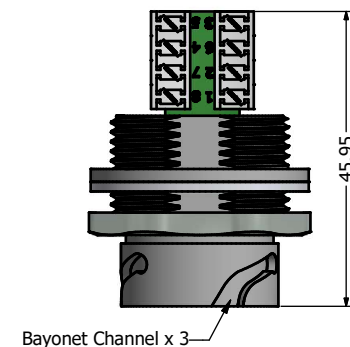
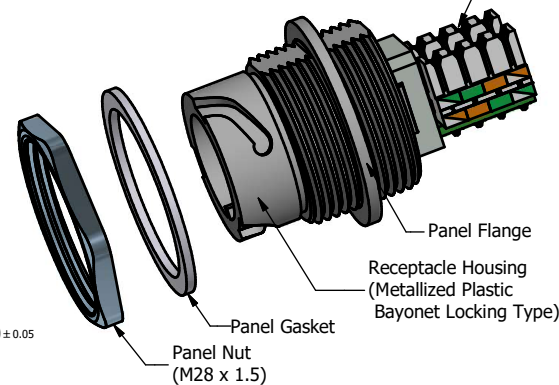
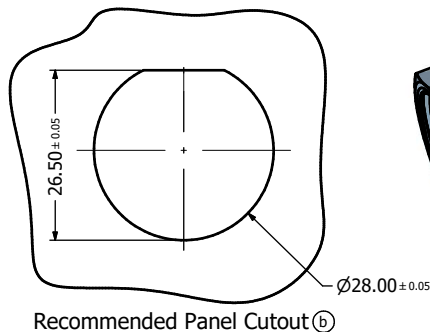
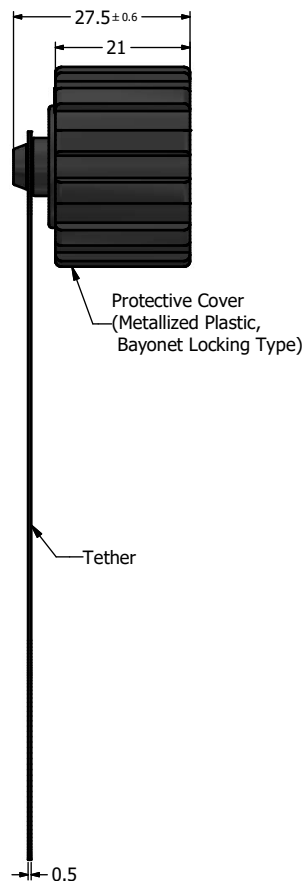
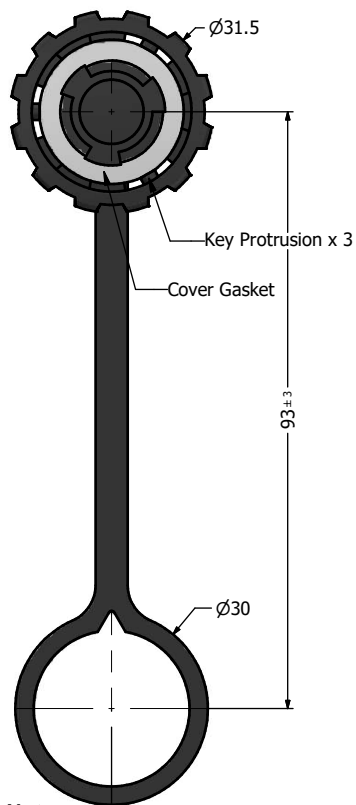


Notes:

1. Electrical Specifications:

- Meets EIA/TIA-568-B.2 Cat.5e Specification
- Contact Resistance: 20mOhm max.
- Insulation Resistance: 500MOhm min. @ 100 VDC
- Current Rating: 1.2A max. at 25°C
- Working Voltage: 100 VDC
- DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
- Operating Temperature: -40°C to +85°C

2. Material and Finish:

- Receptacle Housing: Metallized ABS (Nickel Plated); UL94 V-0
- Cover Coupling Ring: Metallized ABS (Nickel Plated); UL94 V-0
- Panel Nut: Brass, Finish: Nickel Plated
- Panel Gasket: Silicon, Color: White
- Cover Gasket: Silicon, Color: White
- Tether: Polycarbonate, Color: Black
- Cat.5e RJ45 IDC Jack Metal Shell: Copper Alloy, Nickel Plated
- Cat.5e RJ45 IDC Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
- Cat.5e RJ45 IDC Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel

3. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

4. IP67 rated when covered or fully mated with the appropriate mating connector

5. RoHS compliant

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	DOT NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified			Scale: 1.2:1	Dim. in mm	
		Name	Title	Approval Date				Autodesk Inventor	Material: See Notes	
									Title: Receptacle & Cover Assembly Kit Metallized Plastic Receptacle Housing with Shielded Cat. 5e RJ45 IDC Jack	DIN A3
					2011	Date	Name			
					Draw.	Jan. 28	Vincent Ke			
					Appd.	Jan. 28	J. Chaudry			
					Norm					
		1 x c	Ä21-0426	29.10.2021	Bub	D-old			Drawing No.: 17K1A196	Sheet
		b		Mar/08/2011	Vincent Ke				Part No.: 17-10022	1/1
		a	original							
Rev.	Changes	Date	Name							

CONEC