
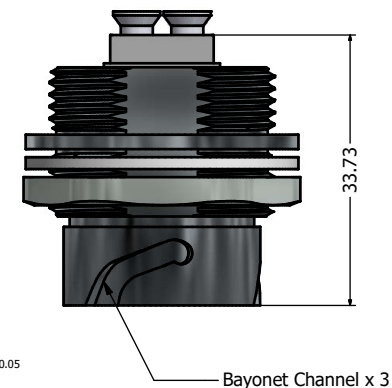
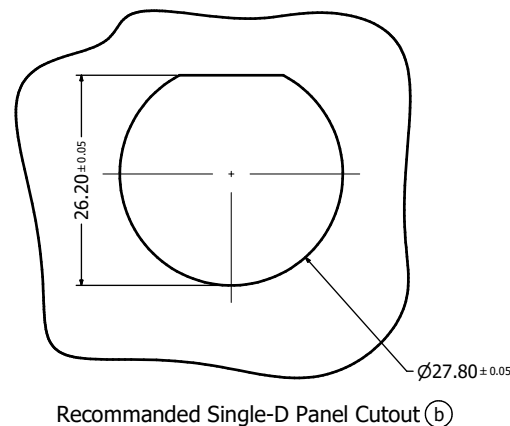
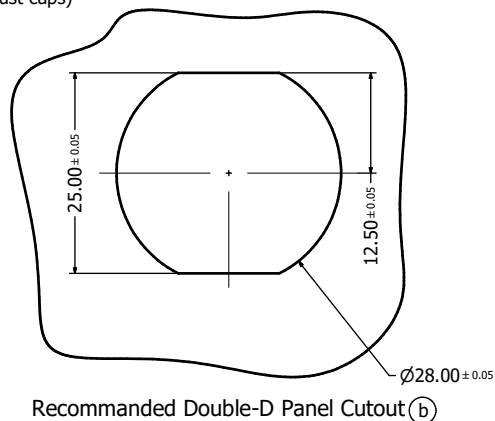


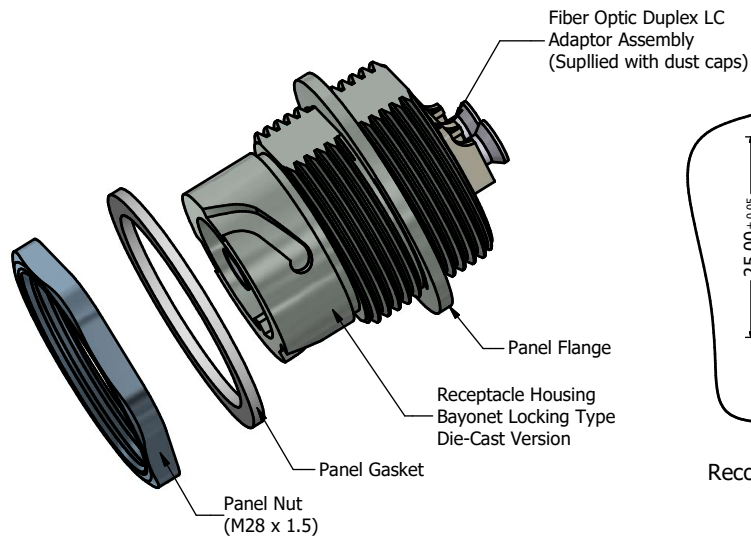

Notes:




1. Material and Finish:

- Receptacle Housing: Zinc Die-Cast, Nickel Plated
- Panel Nut: Brass, Finish: Nickel Plated
- Panel Gasket: Silicone, Color: White
- Duplex LC Adaptor Assembly:
- Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
- Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
- Dust Cap: PP, Color: Neutral transparent
- Operating Temperature: -40°C to +85°C

2. Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.

3. IP67 rated when covered or fully mated with the appropriate mating connector

④ 4. Recommended Mounting Panel Nut torque is 20 to 25 lb-inch

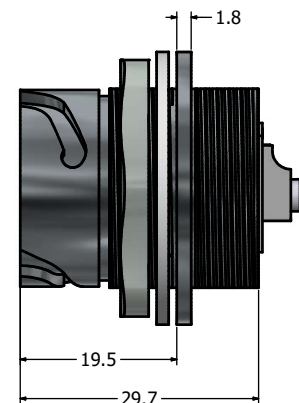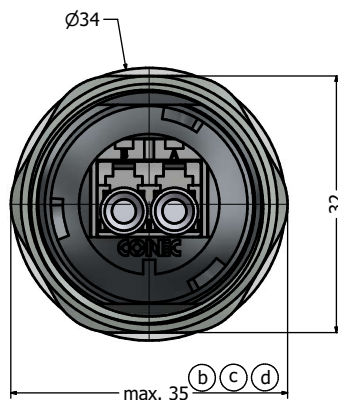

Description	Part Number
Single Mode (SM)	17-300060
Multi Mode (MM)	17-300070
⑥ APC Single Mode (APC SM)	17-300180

RoHS compliant

Customer:				Tolerance Unless otherwise specified		Autodesk Inventor	Scale: 1.5:1	Dim. in mm
Name	Title	Approval Date		0 PLC ±0.50	1 PLC ±0.38		Material: See Notes	
				2 PLC ±0.25	3 PLC ±0.10		Title: IP67 Industrial Duplex LC Receptacle Assembly Kit Nickel Plated Die-Cast Version	
				ANGLES ±3°				
1 x d	A21-0426	26.10.2021	Bub	2008	Date	Name		
c	3 x c	Sep/25/2013	Vincent Ke	Draw.	Jun. 03	Vincent Ke		
b	4 x b	Feb/25/2011	Vincent Ke	Appd.	Jun. 03	J. Chaudry	Drawing No.: 17K1A171	
a	original			Norm				
Rev	Changes	Date	Name	D-old			Part No.: SEE PART NUMBER TABLE	
				CONEC®			DIN A3	
							Sheet 1/1	