

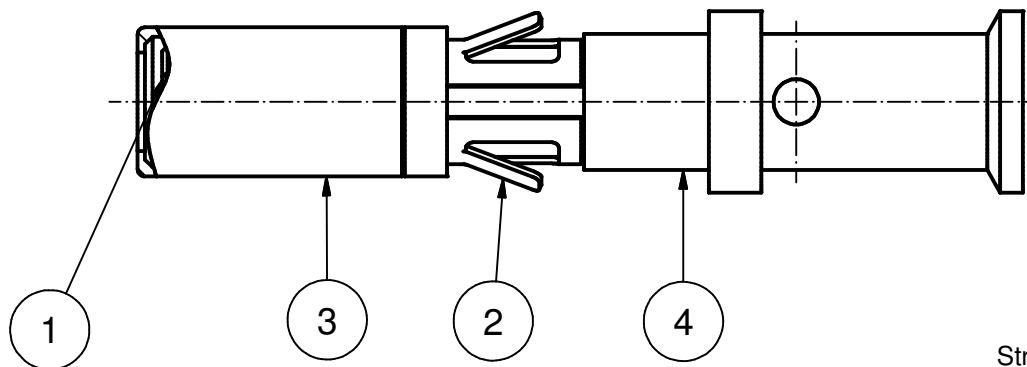
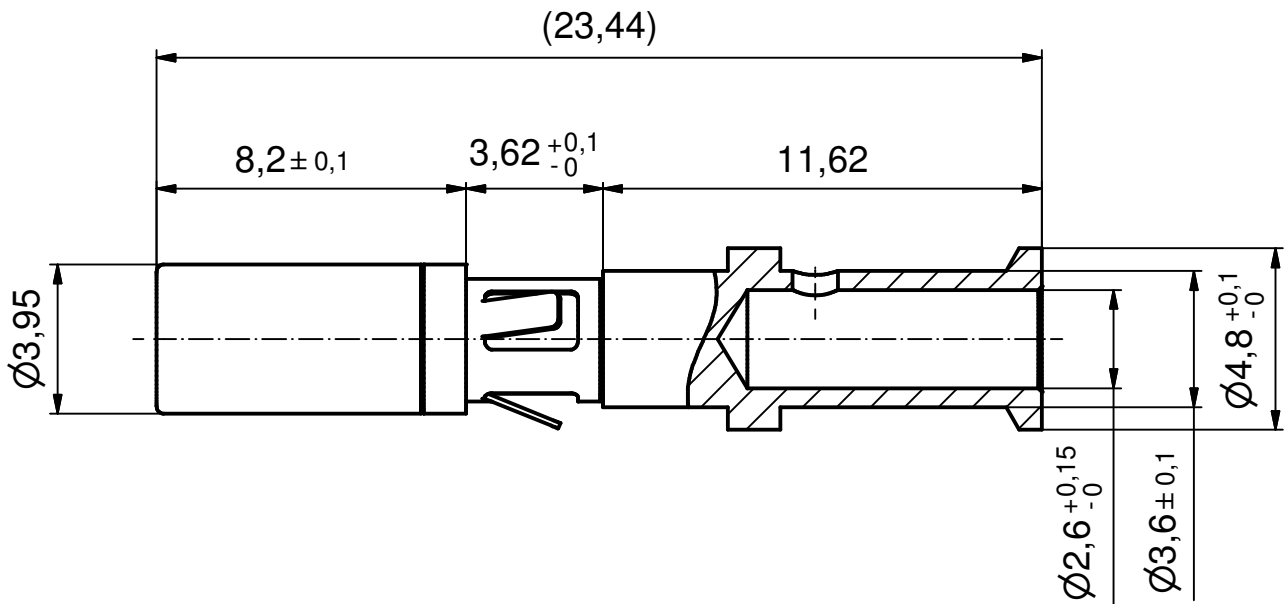


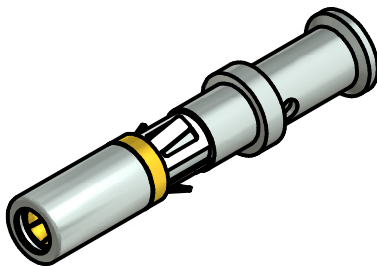


Stripping Dimensions
(2,5 : 1)



NOTES:

1. MATERIAL:
ITEM 1 + 3 + 4: COPPER ALLOY
ITEM 2: STAINLESS STEEL
2. PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
3. CRIMPING: USE CRIMP TOOL 360X21079X
WITH TOOL INSERT 36-000430
TURRET POSITION: 12
SELECTOR SETTINGS: 8 FOR AWG 12
7 FOR AWG 14

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				DO NOT ALTER CAD DRAWING BY HAND							tolerance		 dim. in mm	scale: 10:1								
								material: see partlist														
														date	name		title: HIGH POWER CONTACT FEMALE CRIMP VERSION 20A FOR AWG 12-14					
												drawn	19.11.2013	Strakerjahn								
												appd.	13.12.2013	Koch								
												norm										
												d-old	SK0603Z8_neu			dwg no: 17K1A434 part no: 17-400223						
																				DIN-A4		
				a	Original			sh: 1														
				rev.	description	date	name															