

# Technical data sheet

Cable gland, metric thread with multi-way seal insert,  
light grey

Item no. 2022128



Cable gland with metric connection thread in cap nut design, suitable for junction boxes, housings, distributor cabinets in private and industrial areas. With strain relief and integrated sealing lip, tested according to DIN EN 62444. Protection class IP68. Can be used between -20°C and +65°C.




PA Polyamide

## Master data

Item no.	2022128
Type	V-TEC VM25 2x8
Description 1	Cable gland
Description 2	with multi-way seal insert
Dimension	M25
Colour	Light grey
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	25 Piece
Weight	1,36 kg/100 pc.

## Technical data

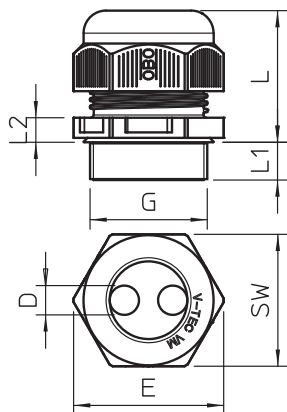

Dimension D	8,00 mm
Dimension E	32,00 mm
Dimension L min.	26,00 mm
Dimension L max.	35,00 mm
Dimension L1	10,00 mm
Dimension L2	6,00 mm
WAF	29,00 mm
Number of drill holes	2
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Thread	M25 x 1,5
Thread type	Metric
Thread length	10,00 mm
Thread increase	1,50 mm

# Technical data sheet

Cable gland, metric thread with multi-way seal insert,  
light grey  
Item no. 2022128



## Technical data

Nominal thread size	25
Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Installation torque	5,00 Nm
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Hexagonal corner dimension	32,00 mm
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief option	<input checked="" type="checkbox"/>