

RES90F16

Rev. 0

CHARACTERISTICS:



Rated Voltage:	250VAC max
Rated Current at Ambient:	16A @ 40°C
Operating Frequency:	DC-60HZ
Climatic Class (IEC60068-1):	25/100/21
Temperature Range:	-25°C to +100°C
Over load Current:	1.5 x Rated Ct. for 1 Min
Operational Leakage current : (at 230VAC and Total C +/-20%)	1.02 mA max
Worst case Leakage current : (N interrupted and Total C +/-20%)	<3.46 mA max
DCR @ 25°C (+/-25%) :	15 mΩ
Test Voltage (100%) for 2 sec:-	P-P: 1100VDC
	P-GND: 3000VDC
Ingress Protection:	IP 20
Weight (approximate):	420 gr

FILTER PARAMETERS:

Total Inductance (P-P'+N-N') @10KHz:	8mH +50%,-30%
Total Capacitance (P-P/P-N) @1KHz:	3μF +/- -20%
Total Capacitance (P/N-GND) @1KHz:	22nF +/- -20%
Total Resistance (P-P/P-N):	220K Ω +/- -10%
Total Resistance (P/N-GND):	

APPROVALS:REACH
ROHS
ULAPPROVED
BY
AJAY

Date: 15-03-2014

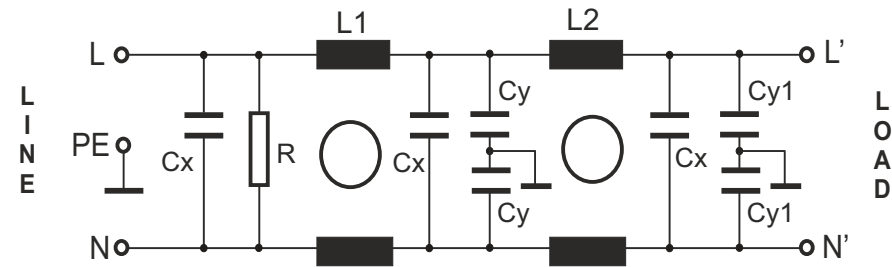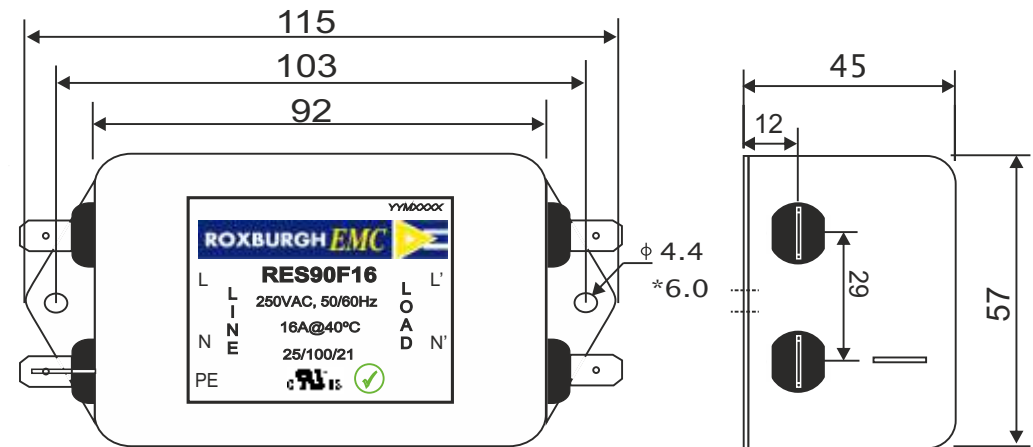CIRCUIT DIAGRAM:**MECHANICAL DIMENSION (mm):****Note:**


Housing matl. Fe with Ni Plated
Fast-On Terminal (6.38 x 0.8mm)
Connections

TOLERANCE: +/-1.0 mm




ROXBURGH EMC
FILTER INSERTION LOSS CHARACTERISTICS
CISPR 17 - 50 OHM METHOD

RES90F16

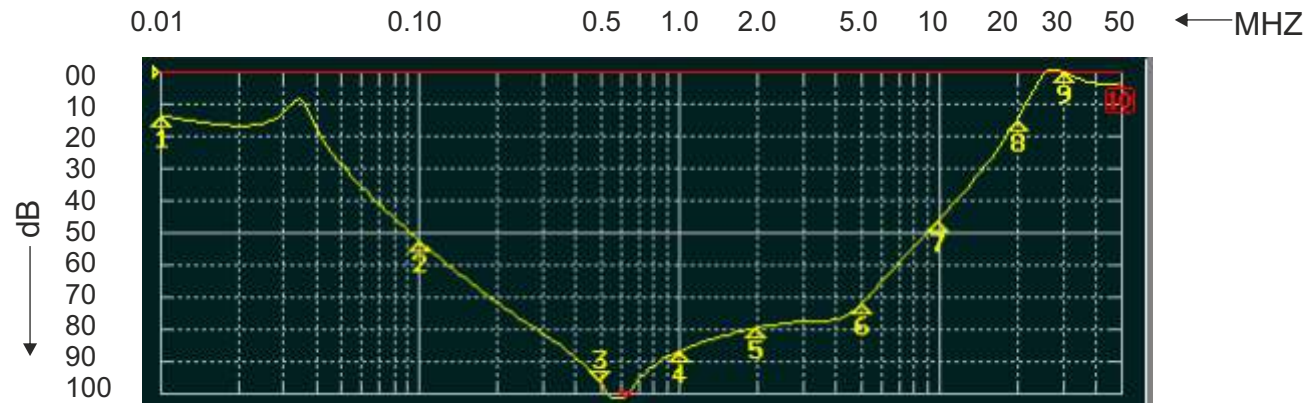

COMMON MODE

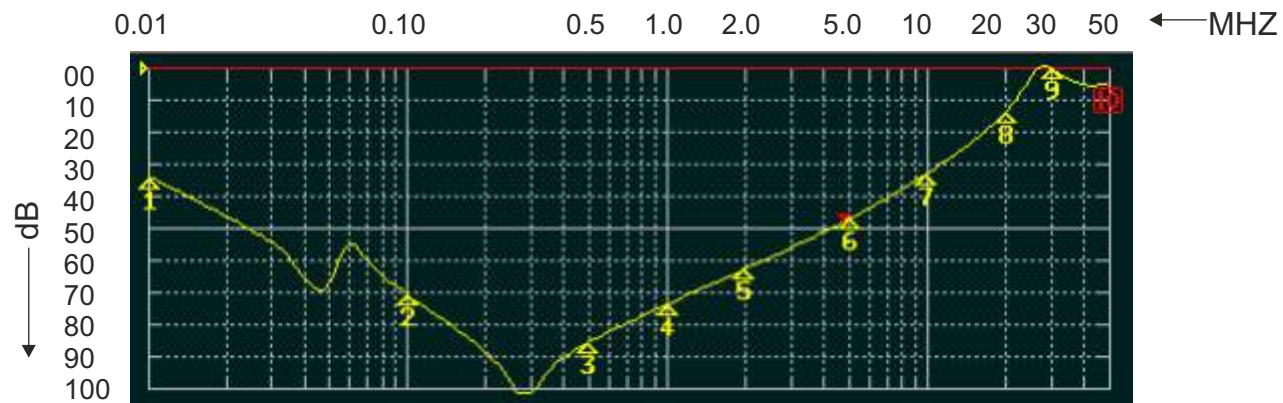

DIFFERENTIAL MODE

