

Data Sheet | Item Number: 2687-2143

Power supply unit; Eco 2; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED

<https://www.wago.com/2687-2143>



Similar to illustration



Similar to illustration




Similar to illustration



Similar to illustration



Similar to illustration

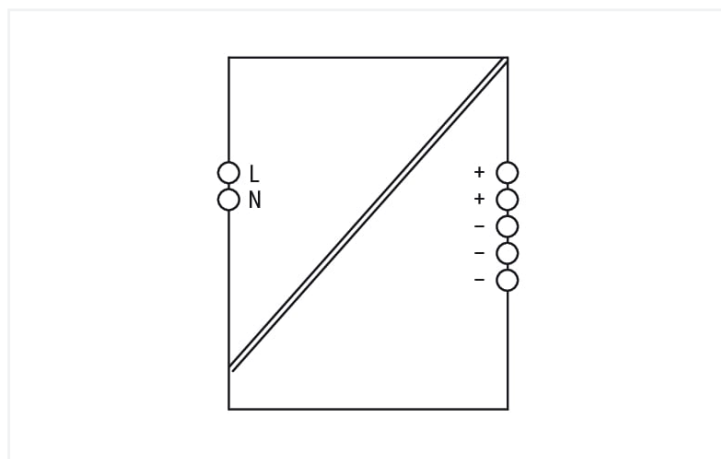

Features:

- Optical status indication
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Connection technology with push-in termination and tool-free lever operation
- Electrically isolated output voltage (SELV/PELV) per EN 61010/UL 61010
- Marker slot (Item No. 2789-1233, not included) for WAGO's marking cards (WMB) and WAGO's marking strips



Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\,nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i\,nom}$	1 x AC 100 ... 240 V	Output voltage range	DC 22 ... 29 V (adjustable)
Input voltage range	1 x AC 90 ... 264 V	Default setting	DC 24 V
Nominal mains frequency range	50 ... 60 Hz	Nominal output current $I_{o\,nom}$	2.5 A (24 VDC)
Input current I_i	≤ 0.5 A (230 VAC; nominal load); ≤ 1.1 A (100 VAC; nominal load)	Nominal output power	60 W
Inrush current	≤ 20 A (after 1 ms)	Deviation	≤ 1 %
Power factor correction (PFC)	Passive	Residual ripple	≤ 20 mV (peak-to-peak, at 230 VAC)
Mains failure hold-up time	≥ 130 ms (230 VAC); ≥ 23 ms (110 VAC)	Overload behavior	Constant power up to 130 %; shutdown and automatic restart in the event of a short circuit

Signaling and communication	
Signaling	1 x LED DC OK (green)

Efficiency/power losses	
Power loss P_i	≤ 0.1 W (no load); ≤ 6 W (nominal load)
Efficiency (typ.)	90.5 %

Circuit protection	
Internal fuse	T 2 A / 250 VAC
Backup fusing (recommended)	16 A (for USA/Canada: 15 A)

Safety and protection	
Isolation voltage (pri.-sec., AC)	3510 V
Protection class	II
Protection type	IP20; per EN 60529
Resistance to reverse feed	$\leq$ DC 35 V
Overvoltage category	III (≤ 2000 m a. s.l.); II (>2000 m a. s.l.)
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	$> 1.100.000$ h

Connection data	
Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.2 ... 4 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 4 mm² / 24 ... 12 AWG

Physical data	
Width	35 mm / 1.378 inches
Height	100 mm / 3.937 inches
Depth from upper-edge of DIN-rail	90 mm / 3.54 inches



Mechanical data	
Mounting type	DIN-35 rail

Material data	
Fire load	0 MJ
Weight	250 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	Siehe Typenschild/Handbuch
Climatic category	3K3 (per EN 60721)
Operating altitude (max.)	5000 m

Standards and specifications	
Conformity marking	CE; UKCA
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 61010-1 UL 61010-2-201 SEMI F47

Commercial data	
PU (SPU)	1 pcs
Country of origin	CN
GTIN	4066966480061
Customs tariff number	85044083900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II

Approvals / Certificates

General approvals			Approvals for hazardous areas		
 					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03080	UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	UL_E198726
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081			
UL Underwriters Laboratories Inc.	UL 61010-2-201	UL_E255817			



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2687-2143

↓

Documentation

Manual

Product Manual Power supply unit; Eco 2; 1-phase; 24 VDC output voltage; 2.5 A output current

V 1.0.0
19.03.2024

pdf
6561.51 KB

↓

Instruction Leaflet

Stromversorgung; Eco 2

V 1.0.0
10.10.2023

pdf
2364.21 KB

↓