

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline F, Communication module, interface RS-232, RS-485, RS-422: 1, transmission speed in the local bus: 100 Mbps, degree of protection: IP20, including bus base module and Axioline F connectors

Product description

The module is designed for use within an Axioline F station. The module is used to operate standard I/O devices with serial interfaces on a bus system.

Your advantages

- A serial input and output channel in RS-232, RS-422, and RS-485 format
- Various protocols supported
- Transmission speed can be set up to 250000 bps
- Parameterization via the PDI channel
- Device rating plate stored

Commercial data

Item number	2688666
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI251
Product key	DRI251
Catalog page	Page 88 (C-6-2019)
GTIN	4046356730860
Weight per piece (including packing)	185 g
Weight per piece (excluding packing)	182 g
Customs tariff number	85176200
Country of origin	DE

AXL F RS UNI 1H - Communication module




2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Technical data

Dimensions

Dimensional drawing	
Width	35 mm
Height	126.1 mm
Depth	54 mm
Note on dimensions	The depth applies when a TH 35-7.5 DIN rail is used (in accordance with EN 60715).

Interfaces

Axioline F local bus

Number of interfaces	2
Connection method	Bus base module
Transmission speed	100 Mbps

RS-232, RS-485, RS-422

Number of interfaces	1
Connection method	Push-in connection
Transmission speed	110 bps ... 250 kbps (can be parameterized)
Transmission physics	Copper
Protocols supported	Transparent, end-to-end, XON/XOFF, Modbus/RTU (client support)
Termination resistor	active, integrated
Data bits	5 ... 8
Stop bits	1 or 2
Input buffer	4 kByte
Output buffer	1 kByte

System properties

Module

Input address area	20 Byte
Output address area	20 Byte
Required parameter data	14 Byte
Required configuration data	7 Byte

Product properties

Product type	I/O component
--------------	---------------

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Product family	Axioline F
Type	block modular
Mounting position	any (no temperature derating)
Scope of delivery	including bus base module and Axioline F connectors

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Potentials: Axioline F local bus supply (U_{Bus})

Supply voltage	5 V DC (via bus base module)
Current draw	max. 240 mA
	typ. 200 mA
Power consumption	max. 1.2 W
	typ. 1 W

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply of the local bus (U_{Bus}) / 5 V supply (I/Os)	1000 V DC, 1 min.
Test voltage: 5 V supply of the local bus (U_{Bus}) / functional ground	1000 V DC, 1 min.
Test voltage: 5 V supply (I/O)/functional ground	1000 V DC, 1 min.

Connection data

Connection technology

Connection name	Axioline F connector
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Axioline F connector

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline F: system and installation" user manual.
Conductor cross section, rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Stripping length	8 mm

Environmental and real-life conditions

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
Mounting position	any (no temperature derating)

AXL F RS UNI 1H - Communication module




2688666


<https://www.phoenixcontact.com/gb/products/2688666>

Drawings

Connection diagram

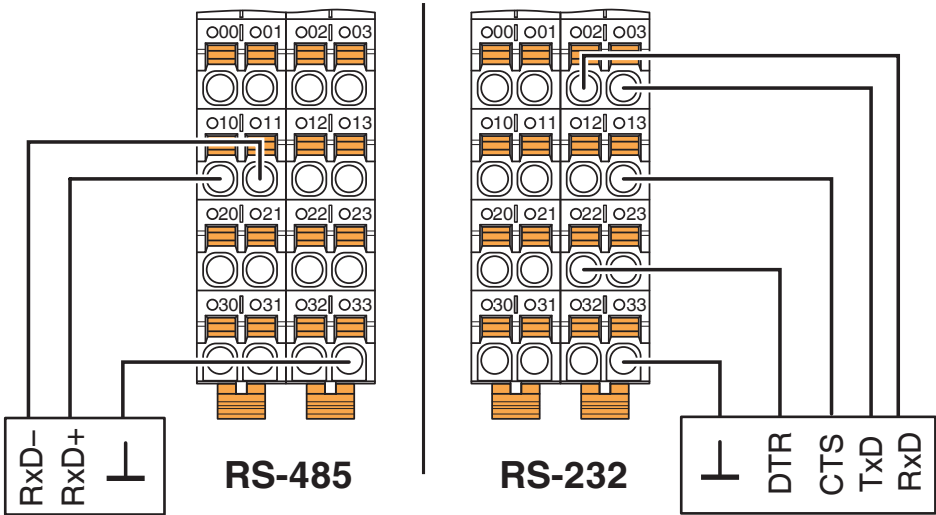


Dimensional drawing

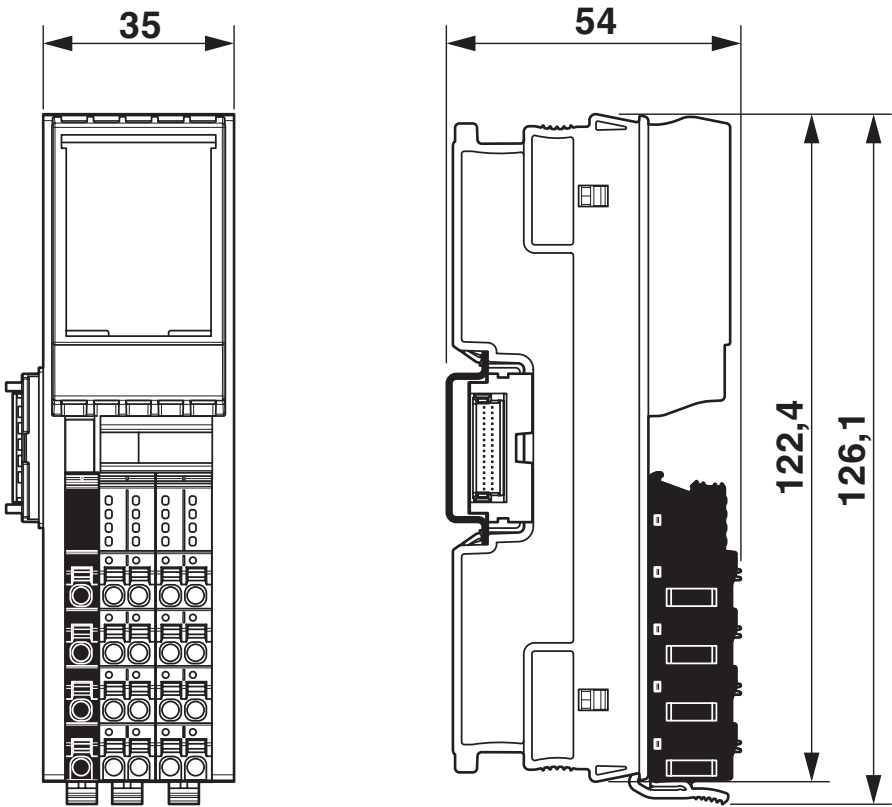

Dimensions

Block diagram

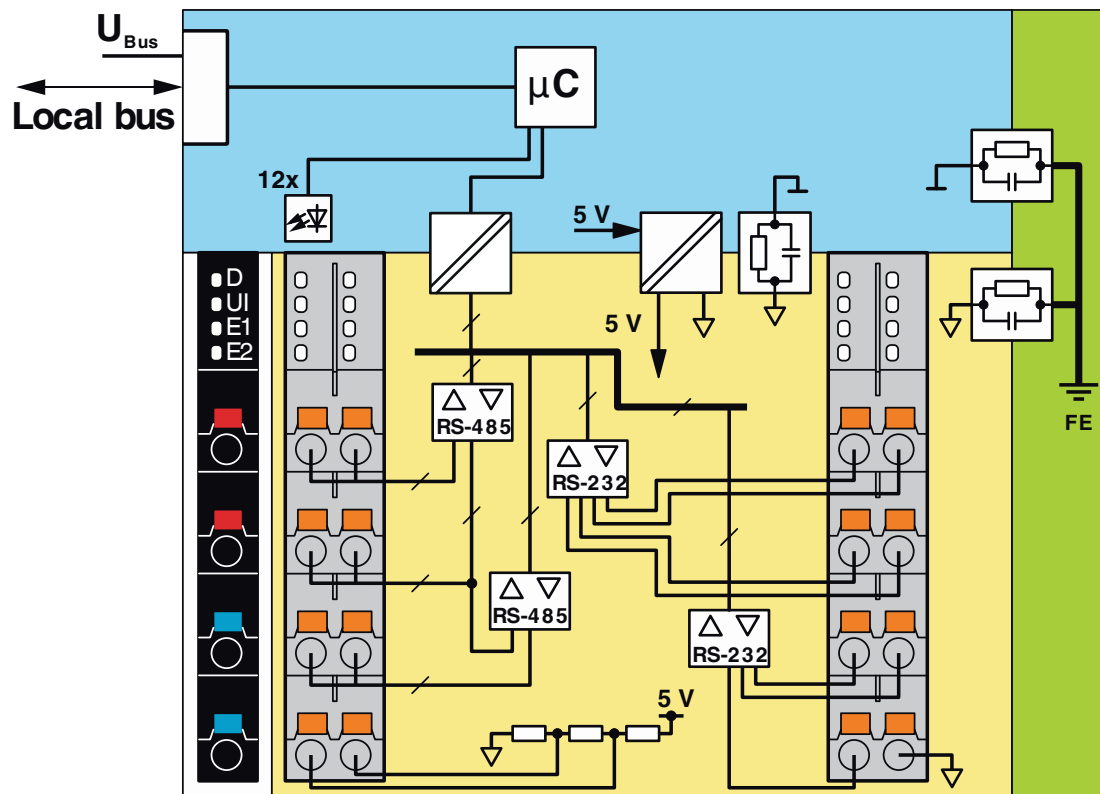

Internal wiring of the terminal points

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2688666>



DNV GL

Approval ID: TAA00000DF



LR

Approval ID: LR2001902TA-08



BV

Approval ID: 36433/B4 BV



PRS

Approval ID: TE/1020/880590/21



UL Listed

Approval ID: FILE E 238705



cUL Listed

Approval ID: FILE E 238705

BSH

Approval ID: 840



RINA

Approval ID: ELE008423XG

ABS

Approval ID: 23-2449604-PDA



EAC

Approval ID: TR_TS_D_01831-19



EAC

Approval ID: TR_TS_D_01831-19

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>



cUL Listed

Approval ID: FILE E 238705



UL Listed

Approval ID: FILE E 238705

ABS

Approval ID: 23-2449604-PDA

BSH

Approval ID: 840



BV

Approval ID: 36433/B4 BV



DNV GL

Approval ID: TAA00000DF



PRS

Approval ID: TE/1020/880590/21



RINA

Approval ID: ELE008423XG



LR

Approval ID: LR2001902TA-08

UAE-RoHS

Approval ID: 23-02-63242

UAE-RoHS

Approval ID: 23-02-63242

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Classifications

ECLASS

ECLASS-11.0	27242608
ECLASS-12.0	27242608
ECLASS-13.0	27242608

ETIM

ETIM 9.0	EC001604
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	a323d349-35de-42e4-9a85-8d03e30c52a2
EF3.0 Climate Change	
CO2e kg	7.19 kg CO2e

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

Accessories

AXL F BS H - Bus connector

2700992

<https://www.phoenixcontact.com/gb/products/2700992>

Axioline F bus base module for housing type H



ZB 20,3 AXL UNPRINTED - Zack marker strip

0829579

<https://www.phoenixcontact.com/gb/products/0829579>



Zack marker strip for Axioline F (device labeling), in 2 x 20.3 mm pitch, unprinted, 25-section, for individual labeling with B-STIFT 0.8, X-PEN, or CMS-P1-PLOTTER

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

ZBF 10/5,8 AXL UNPRINTED - Zack Marker strip, flat

0829580

<https://www.phoenixcontact.com/gb/products/0829580>




Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.15 mm, lettering field size: 4 x 10, 15 x 5 mm, 1 x 5.8 x 5 mm, Number of individual labels: 50

AXL SHIELD SET - Shield connection

2700518

<https://www.phoenixcontact.com/gb/products/2700518>



Axioline shield connection set (contains 2 shield bus holders and 2 SK 5 shield connection clamps)

AXL F RS UNI 1H - Communication module



2688666

<https://www.phoenixcontact.com/gb/products/2688666>

EMT (35X28)R - Insert label

0801602

<https://www.phoenixcontact.com/gb/products/0801602>



Insert label, for marking the Axioline F series from Phoenix Contact, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, lettering field size: 35 x 28 mm, Number of individual labels: 500

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk