

PRODUCT SHEET


M12-C251S-AS-i Cable

2TLA910094R0000

2.5 m cable with 5-pin M12 female connector.
Can be used when connecting HD5-B to an AS-i system.




Pin configuration



connector pin assignment

Nr.	Colour	Comment
1	bn	
2	-	
3	bl	
4	-	
5	-	

Dimensions

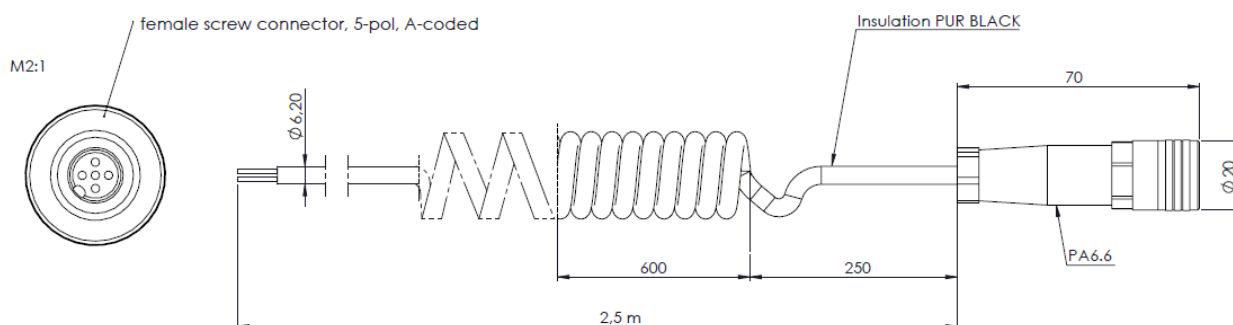

Ordering information

Description	Type	Order code
M12-C251S-AS-i Cable Spiral cable 2 * 0.75mm ² , 0.6 / 2 + 1.4m	M12 Cable	2TLA910094R0000

Technical data

Technical data	
Wire diameter	2x0.75 mm ²
Wire material	Finely stranded copper
Wire insulation color	Brown, Blue
Jacket insulation Material	PUR 11Y, halogen-free
Jacket insulation Outer Diameter	6.20 mm ± 0.20 mm
Jacket insulation Color	Black RAL 9005
M12-contact Material	PVC
M12-contact Outer Diameter	20 mm
M12-contact Color	Black
Nominal Voltage	24 V DC
Maximum Rated Voltage	36 V DC
IP-class	IP65
Temperature range	-20 to +70 C°

ABB Electrification Sweden AB
SE-721 61 Västerås, Sweden
abb.com/lowvoltage

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

Copyright© 2020 ABB
All rights reserved