

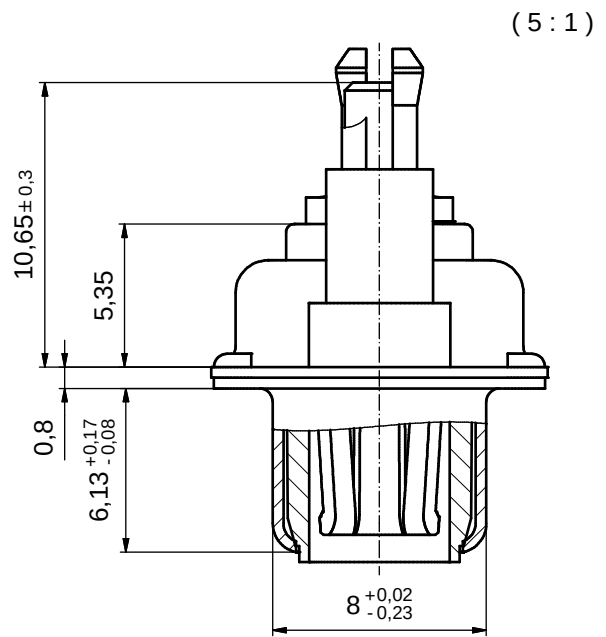
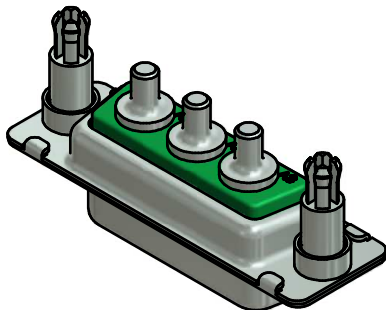
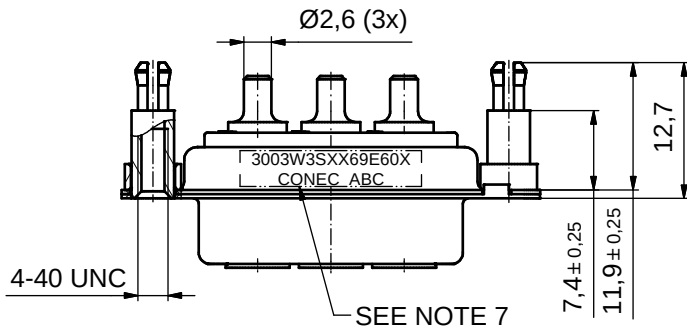


P.C.B. HOLE DRILLINGS
(P.C.B. TOP SIDE)

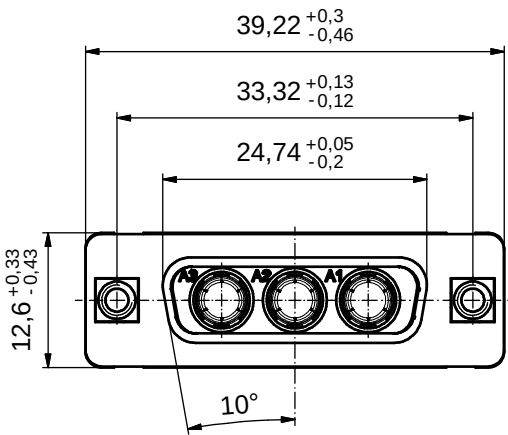

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: PBT GF UL 94 V-0; GREEN
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
- THREADED REAR SPACER PCB CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLES: Ø3,1±0,1mm; PCB-THICKNESS: 3,2mm
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3003W3SXX69E60X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)						
							material: SEE NOTES						
								date	name	title: D-SUB COMBINATION FEMALE 3W3S with threaded rear spacer PCB clip			
								drawn	26.11.15			Unkrüer	
								appd.	26.11.15			Lehmenkühler	
								norm					
								d-old					
											dwg no: 13K1A5099		DIN-A3
				a	Original								sh: 1
				rev.	description	date	name						part no: 3003W3SXX69E60X

CONEC