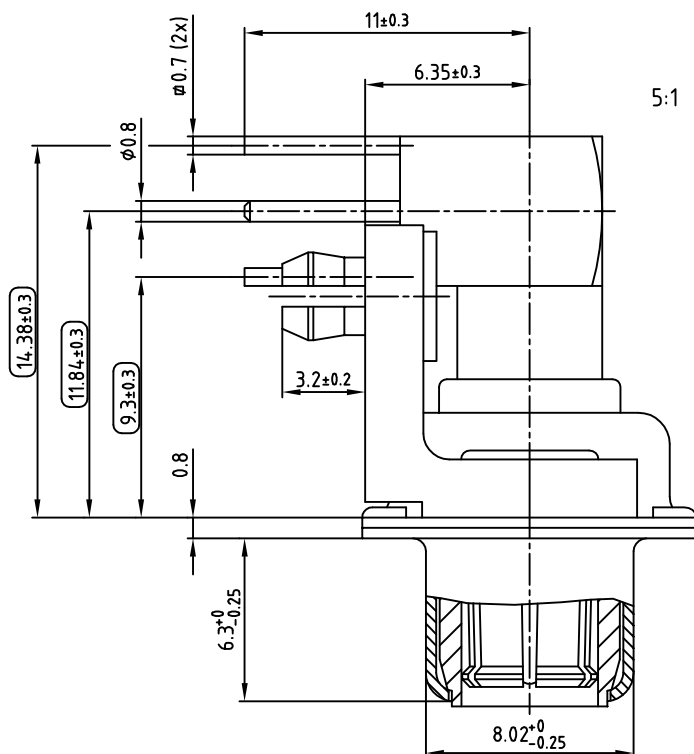
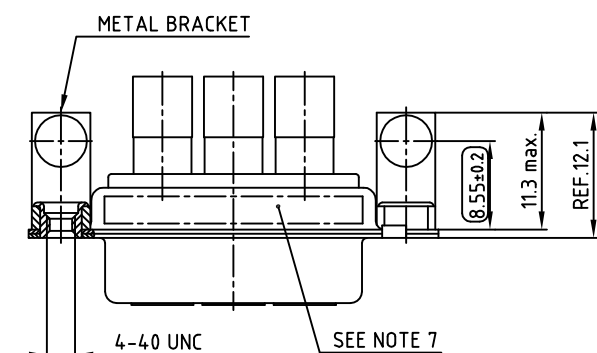
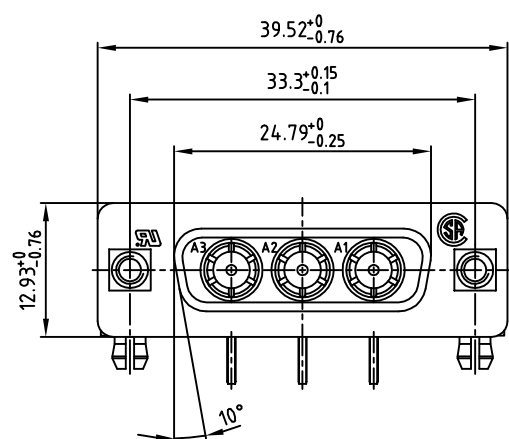


1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING INNER CONDUCTOR: 50µ" HARD GOLD OVER min. 50µ" NICKEL
PLATING OUTER CONDUCTOR: 30µ" HARD GOLD OVER min. 50µ" NICKEL
4. METAL BRACKET: STEEL; min. 320µ" TIN over 80µ" NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. PCB-SNAP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
7. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
8. CONNECTOR IS PART MARKED: 3003W3SXX78N40X CONEC ABC
9. = CHECK DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1 (5:1)	
						dim. in mm		material: SEE NOTES	
				2004	date	name		title:	
				drawn	09.07.	Lehmenkühler		D-SUB COMBINATION FEMALE 90°	
				appd.	09.07.	Mickenbecker		3W3S	
				norm			with threaded insert, metal bracket and clip		
				d-old			dwg no:		
						AutoCAD 2004		DIN-A	
						13K1A1185		3	
								sh: 1/1	
rev.	description	date	name					part no: 3003W3SXX78N40X	