


Collar/
Scheibe

Threaded insert/
Gewindeeinsatz



Technical specification/

Technische Daten:

Dielectric withstanding voltage/ Spannungsfestigkeit:	1000 V, 50 Hz 1 min.
Current rating/ Strombelastbarkeit:	7,5 A (UL), 5 A (CSA,VDE)
Insulation resistance/ Isolationswiderstand:	$\geq 5 \text{ G}\Omega$
Temperature range/ Temperaturbereich:	- 55 °C ... + 125 °C
Solder cup accepts cable/ Lötkelch geeignet für Kabel:	max. AWG 20
Mating cycles/ Steckzyklen:	Quality class 3 = 50 Gütestufe 3

Materials/




Werkstoffe:

Contact/ Kontakt:	Cu alloy, Au over Ni
Insulator/ Isolierkörper:	PBT GF UL 94 V-0, green/grün
Shell/ Gehäuse:	Steel, Sn over Ni
Threaded insert/ Gewindeeinsatz:	Cu alloy, Sn over Ni
Collar/ Scheibe:	Cu alloy, Sn over Ni

Installation specification/

Montagedaten:

Recommended torque value for thread/ Empfohlenes Drehmoment für Gewinde:	max. 6 in.LB/max. 67 Ncm
---	--------------------------

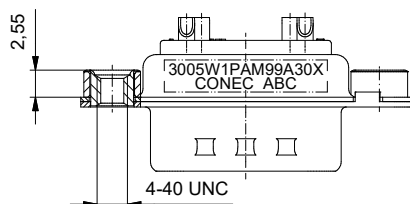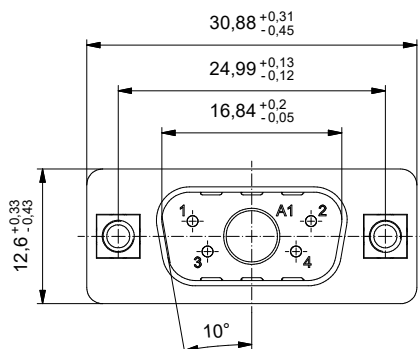

Part no. / Part marked/ Art.-Nr. / Bedruckung:	Contact plating/ Kontakt Veredelung:
3005W1PAM99A30X	Signal contact Signalkontakt: gold flash over nickel Gold über Nickel
	No contact on pos. A1/ Kein Kontakt an Pos. A1

			dim. in mm		D-SUB Combination Male 5W1P Solder cup with threaded insert <i>D-SUB Combination Stiftleiste 5W1P Lötkelch mit Gewindeeinsatz</i>	
			Date/Datum	Name		
		drawn/ gez. appd./ gepr...	02.04.2020	Lehmenkühler	dwg no / Z.-nr.: 13K1A6004	
			02.04.2020	Henneboel		
Index: a Original						
Status: InBearbeitung					DIN-A3	
RoHS compliant/ konform					1 / 1	