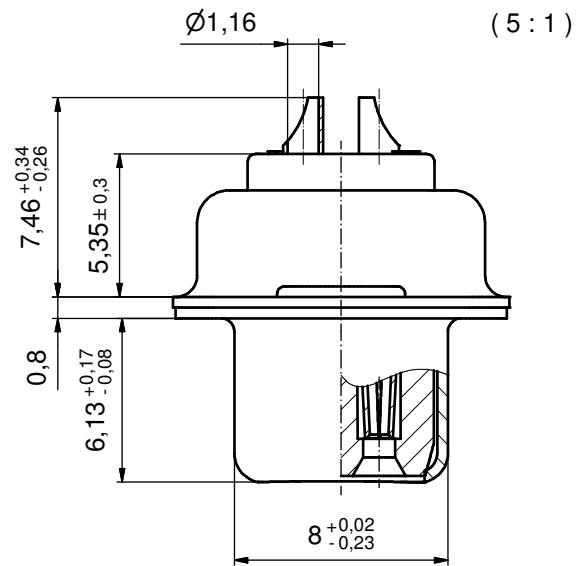
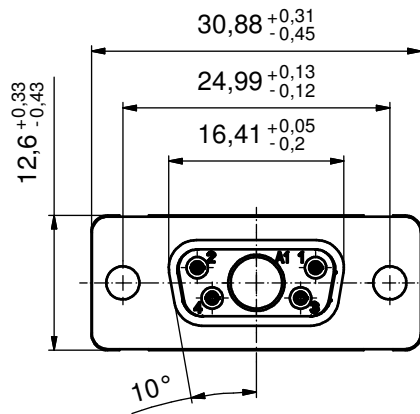


NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- CONNECTOR IS PART MARKED: 3005W1SAM99A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)				
							material: SEE NOTES				
								date	name	title: D-SUB COMBINATION FEMALE 5W1S SOLDER CUP	
								drawn 16.12.10	Henneboel		
								appd. 16.12.10	Koch		
				norm		dwg no:		Inventor 10	DIN-A3		
				d-old							
	a	Origin				13K1A3528		sh: 1			
rev.	description	date	name			part no: 3005W1SAM99A10X					