
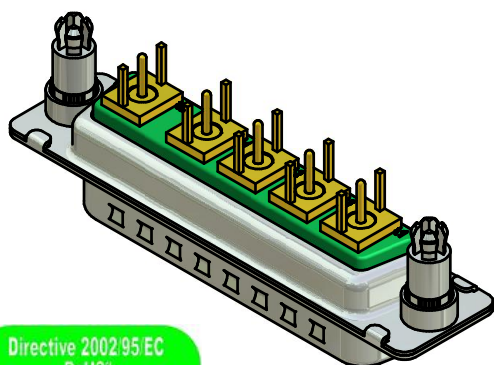
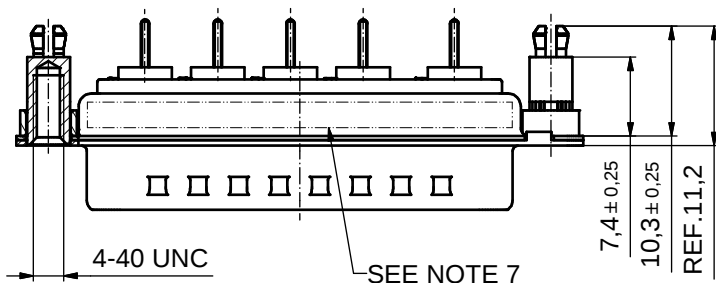




Directive 2002/95/EC
"RoHS"
Compliant

1. METAL SHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING INNER CONDUCTOR: 50µin HARD GOLD over min. 50µin NICKEL
PLATING OUTER CONDUCTOR: 30µin HARD GOLD over min. 50µin NICKEL
4. THREADED SPACER CLIP: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\varnothing 3.1 \pm 0.1$; PCB THICKNESS 1,6mm
5. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3005W5PXX76E20X CONEC ABC

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

DO NOT ALTER CAD DRAWING BY HAND

a	Origin		
rev.	description	date	name



scale:	2:1 (5:1)		
material:	SEE NOTES		
title:			
D-SUB COMBINATION MALE			
5W5P			
with treaded spacer clip			
dwg no:	Inventor 10		DIN-
13K1A2213		A3	
		sh: 1	
part no:	3005W5PXX76E20X		