
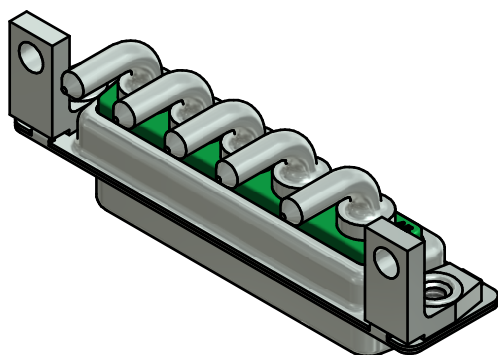

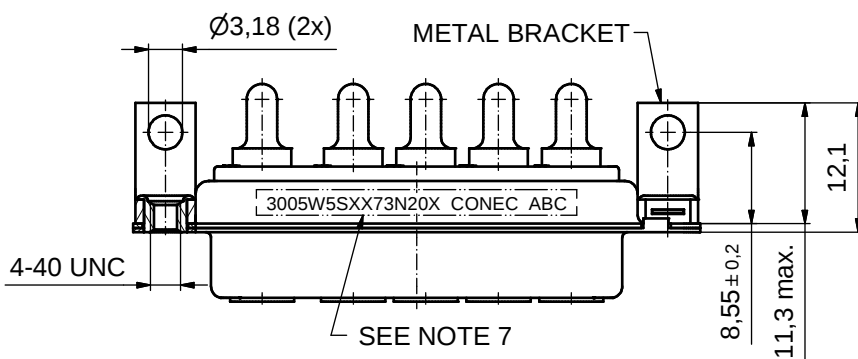
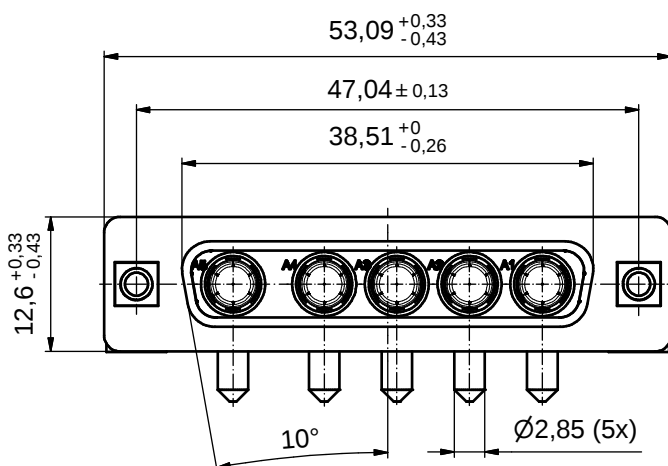
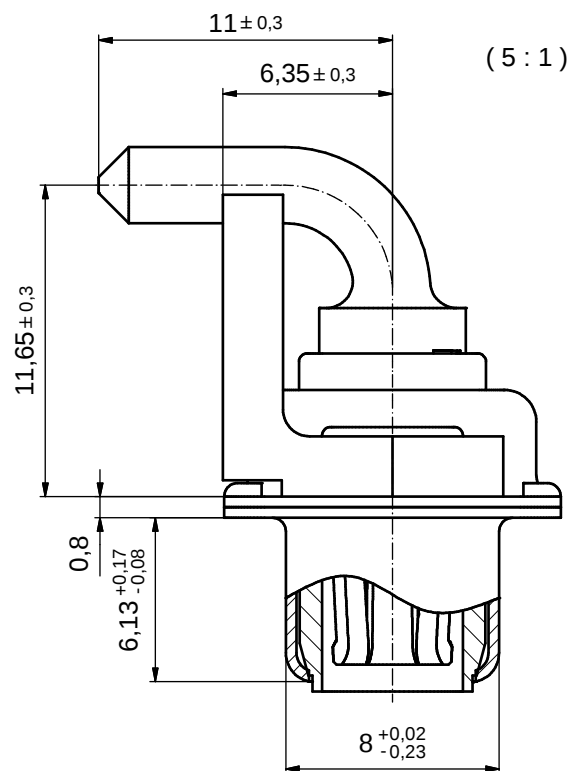


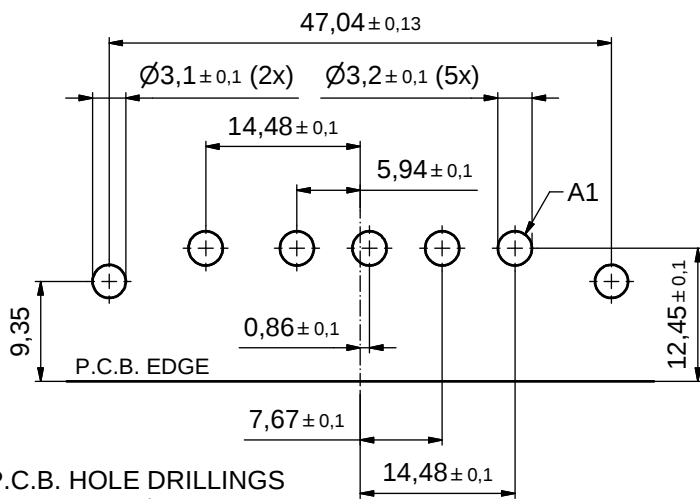

NOTES:

- METALSHELLS: STEEL; min. $315\mu\text{in}$ TIN over $40\text{--}80\mu\text{in}$ NICKEL
- INSULATOR: PBT GF UL 94 V-0; GREEN
- HIGH POWER CONTACTS 20A: COPPER ALLOY;
PLATING MATING AREA: GOLD FLASH over NICKEL
PLATING TERMINATION SIDE: $160\text{--}240\mu\text{in}$ TIN over $80\mu\text{in}$ NICKEL
- METAL BRACKETS: ZINC DIE CAST; $300\mu\text{in}$ COPPER/ $40\text{--}120\mu\text{in}$ NICKEL/ $120\text{--}200\mu\text{in}$ TIN
- THREADED INSERTS: COPPER ALLOY; min. $200\mu\text{in}$ TIN over $80\mu\text{in}$ NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3005W5SXX73N20X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
date	name	date	name	date	name		
drawn	30.01.14	Schmidt		appd.	30.01.14	Lehmenkühler	
norm				d-old			
a	Original						
rev.	description	date	name				

CONEC

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB COMBINATION FEMALE 90°	
5W5S	
with threaded insert and metal bracket	
dwg no:	DIN-A3
13K1A4568	sh: 1
part no:	3005W5SXX73N20X