
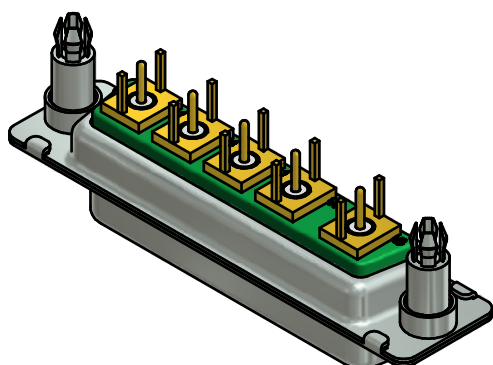

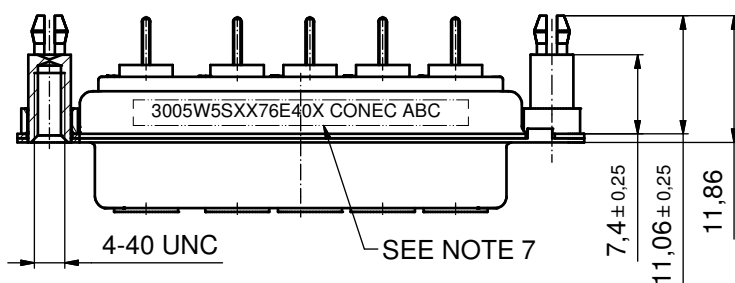
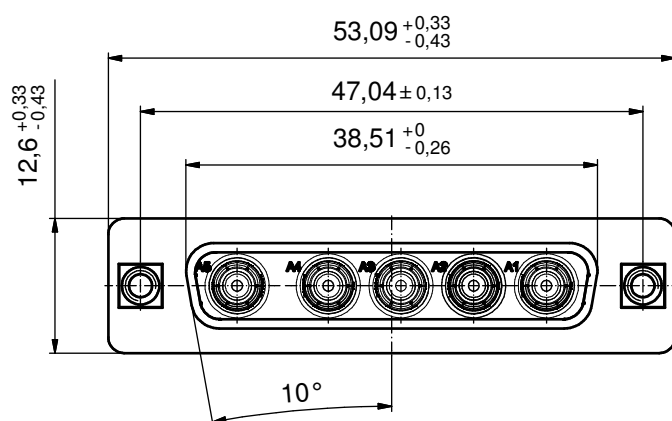
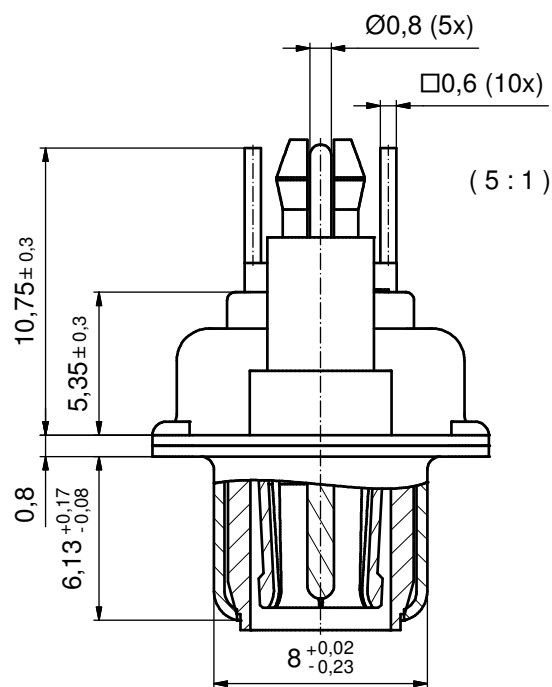




1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATOR: PBT GF UL 94 V-0, GREEN
3. COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING, INNER CONDUCTOR: 50µin HARD GOLD over min. 50µin NICKEL
PLATING, OUTER CONDUCTOR: MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL
TERMINATION SIDE: GOLD FLASH over NICKEL
4. THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\varnothing 3,1 \pm 0,1$ mm; PCB-THICKNESS: 2,3 mm
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: 3005W5SXX76E40X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm		scale: 2:1 (5:1)		
								material: SEE NOTES		
DO NOT ALTER CAD DRAWING BY HAND					date	name		title: D-SUB COMBINATION FEMALE 5W5S with threaded spacer clip		
					drawn	13.01.14	Henneboel			
					appd.	13.01.14	Lehmenkühler			
					norm					
					d-old					
							dwg no: 13K1A4549		DIN-A3 sh: 1	
				a						
rev.	description	date	name	part no: 3005W5SXX76E40X						

Directive 2002/95/EC RoHS compliant