
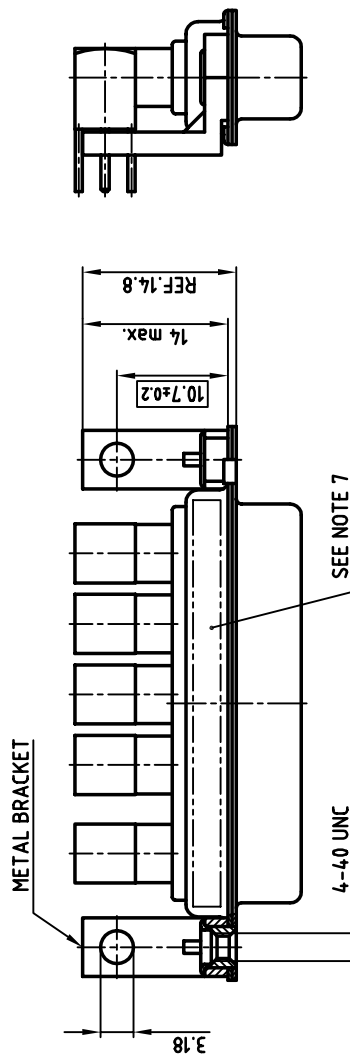
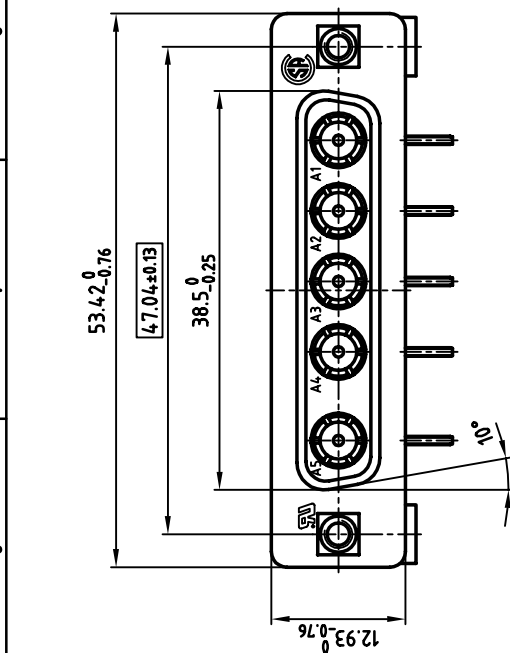
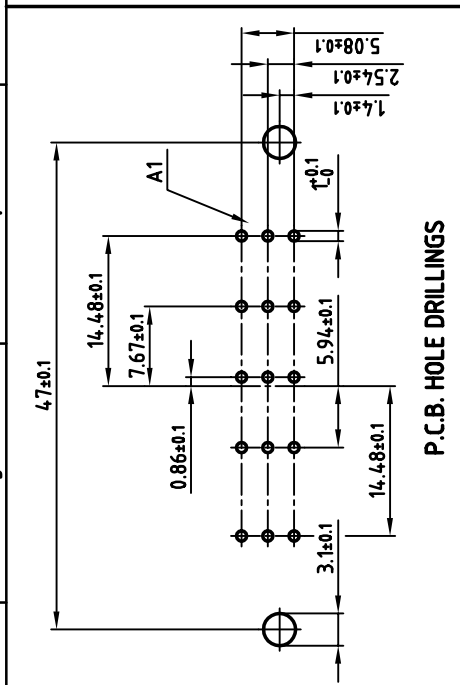


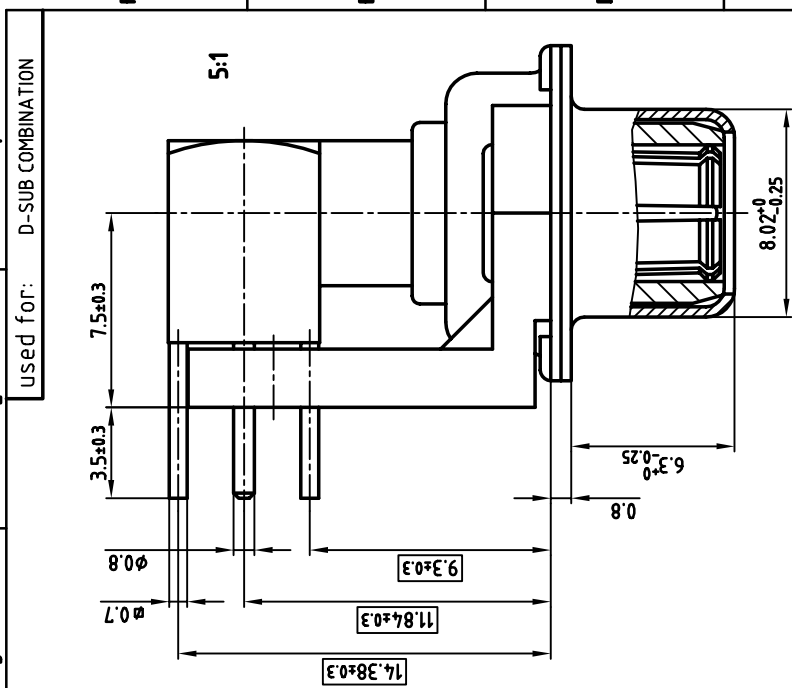

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING: INNER CONDUCTOR: min. 50μ" HARD GOLD OVER min. 50μ" NICKEL
OUTER CONDUCTOR: min. 30μ" HARD GOLD OVER min. 30μ" NICKEL
4. METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
7. CONNECTOR IS PART MARKED: 3005W5SXX78G20X CONEC Y/W/W

8. = CRITICAL DIMENSION

DO NOT ALTER CAD DRAWING BY HAND												tolerance				scale: 2:1 (5:1) material: SEE NOTES					
												title: D-SUB COMBINATION FEMALE 90° 5W5S with threaded insert and metal bracket		dwg no: AutoCAD 2000 DIN-A 13K1A502 3		sh: 1/1					
DO NOT ALTER CAD DRAWING BY HAND OWNERSHIP AND COPYRIGHT OF CONEC GmbH THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.																		part no: 3005W5SXX78G20X			
																		rev	description	date	name