
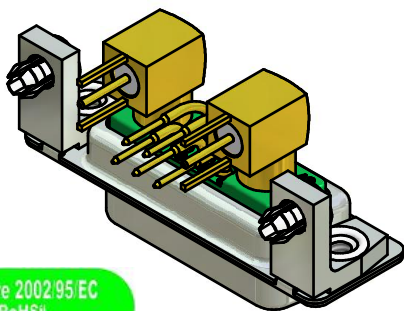

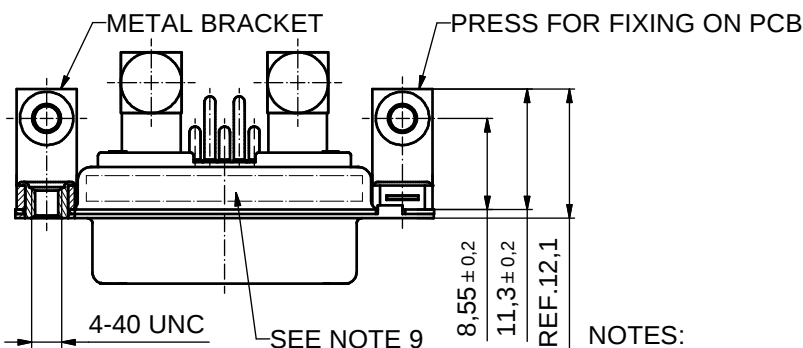
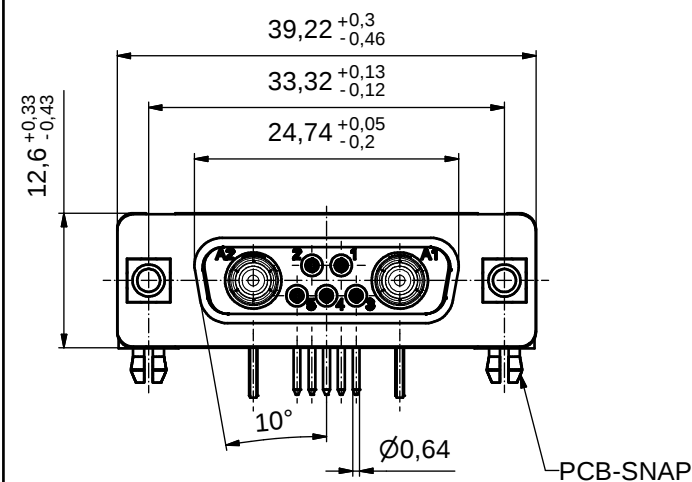
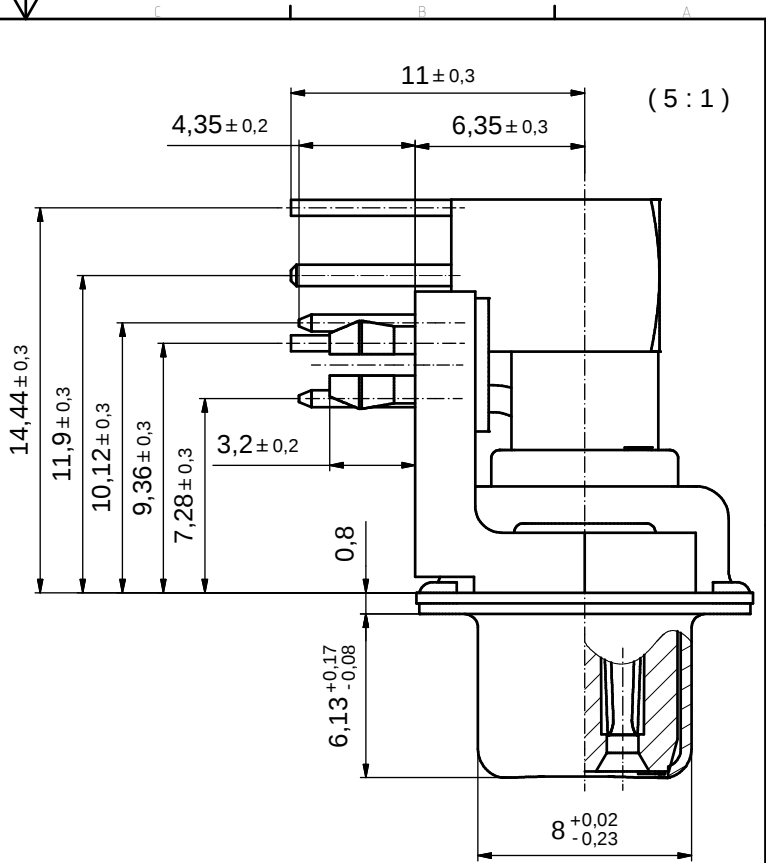


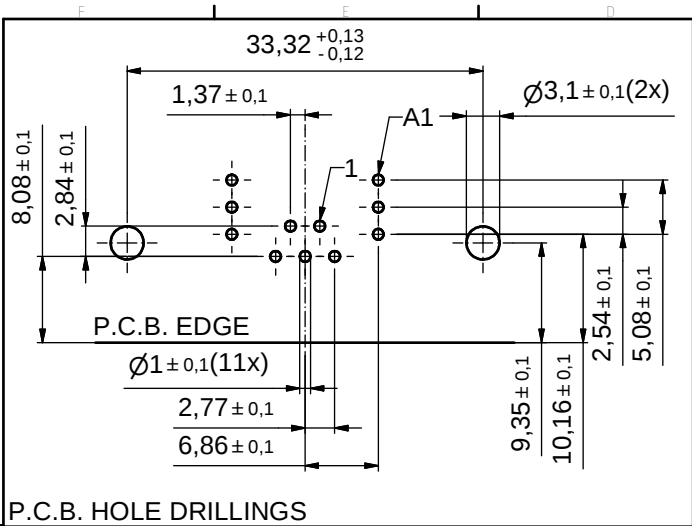

Directive 2002/95/EC
RoHS
Compliant

NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
- COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING INNER CONDUCTOR: 50µm HARD GOLD over min. 50µm NICKEL
PLATING OUTER CONDUCTOR: 30µm HARD GOLD over 50µm NICKEL
- METAL BRACKET: ZINC DIE CAST; 300µm COPPER/ 40-120µm NICKEL/ 120-200µm TIN
- THREADED INSERT: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- PCB-SNAP: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6 mm
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3007W2SAT78N40X CONEC ABC

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
rev.	description	date	name	date	name	
				drawn	30.08.2007	Sonnenberg
				appd.	30.08.2007	Mickenbecker
				norm		
				d-old		
a	Origin					

CONEC

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB COMBINATION FEMALE 7W2S with threaded insert, metal bracket and clip	
dwg no:	Inventor 10	DIN-A3
	13K1A2224	sh: 1
part no:	3007W2SAT78N40X	