
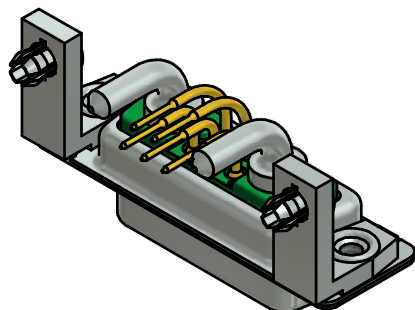

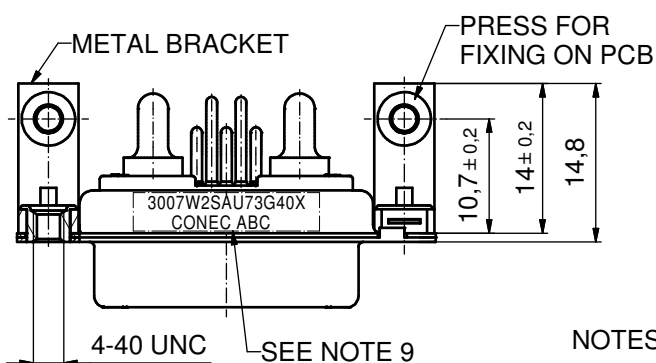
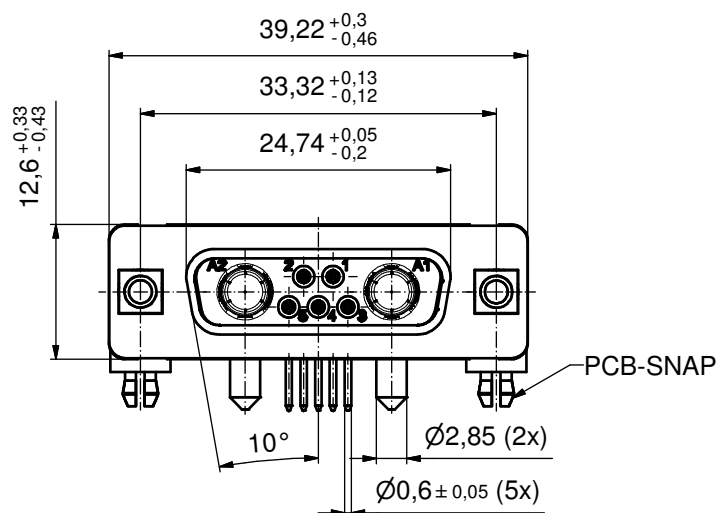
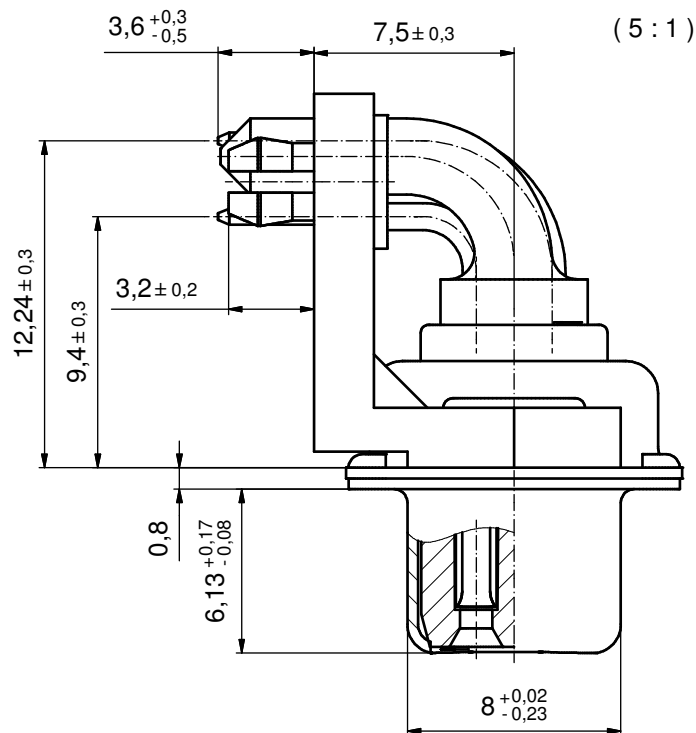


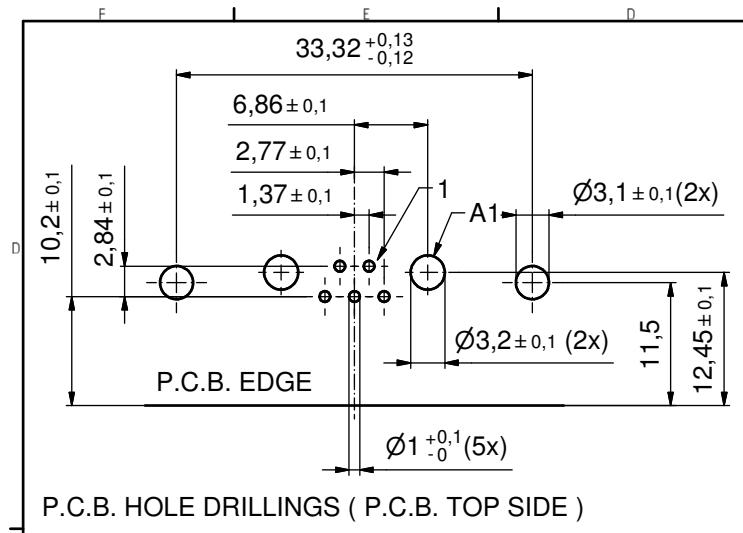

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING, MATING AREA: GOLD FLASH over NICKEL
PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/ 40-120µin NICKEL/ 120-200µin TIN
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\varnothing 3.1 \pm 0.1$; PCB THICKNESS 1.6 mm
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: [3007W2SAU73G40X CONEC ABC]

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					tolerance		 dim. in mm	scale: 2:1 (5:1)	
								material: SEE NOTES	
						date	name	title: D-SUB COMBINATION FEMALE 90° 7W2S with threaded insert, metal bracket and snap	
					drawn	11.03.15	Henneboel		
					appd.	11.03.15	Lehmenkühler		
					norm				
					d-old		dwg no:		DIN-A3 sh: 1
	a	Original					13K1A4910		
	rev.	description	date	name			part no:		3007W2SAU73G40X