
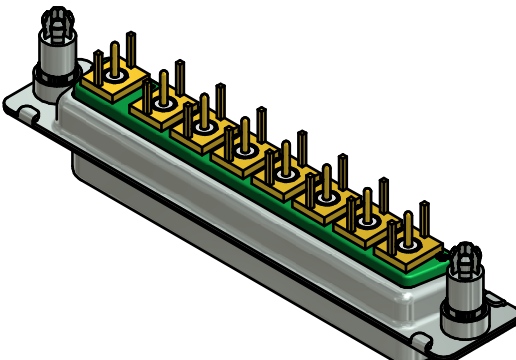

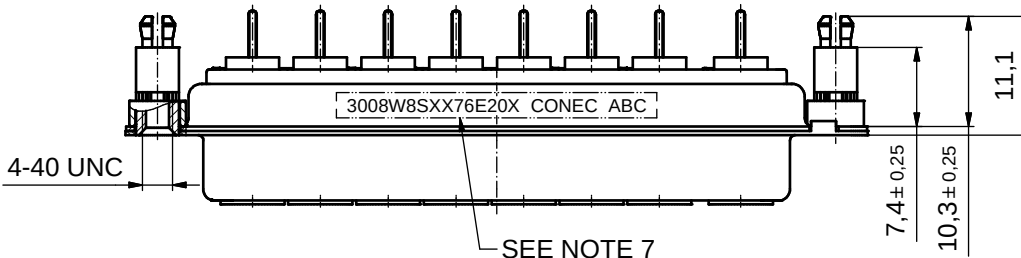
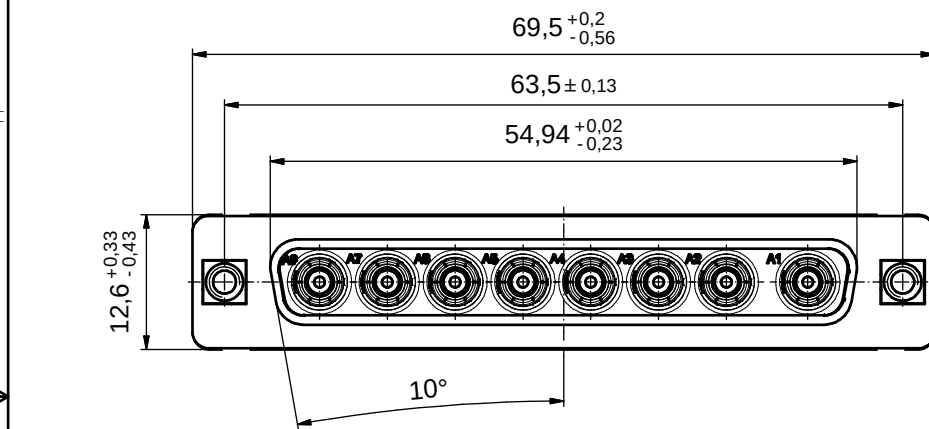
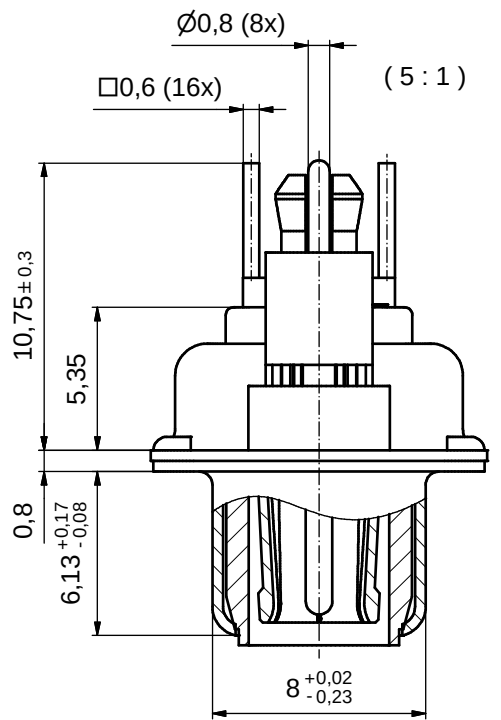


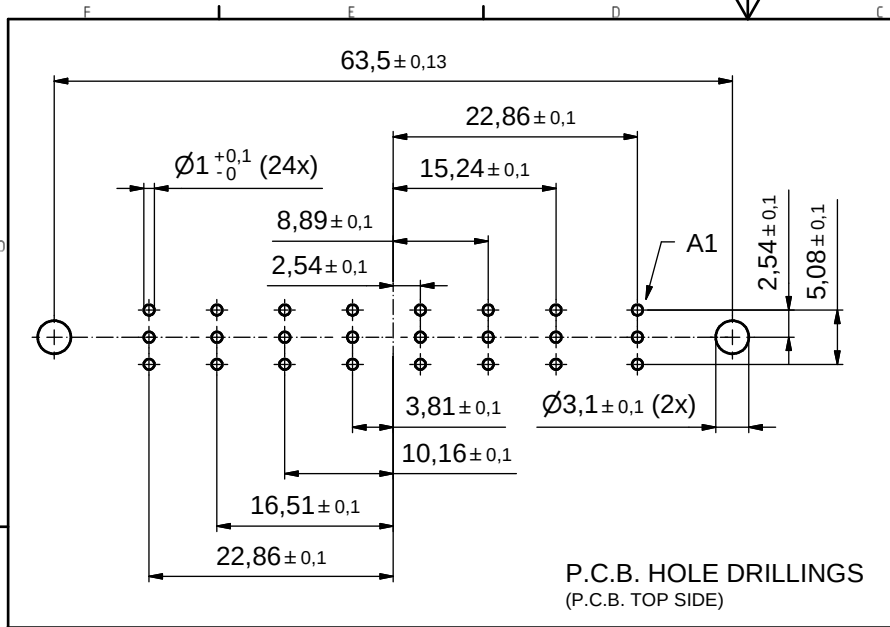

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATOR: PBT GF UL 94 V-0; GREEN
- COAXIAL CONTACTS 50 OHM: COPPER ALLOY
PLATING, INNER CONDUCTOR: 50µin HARD GOLD over min. 50µin NICKEL
PLATING, OUTER CONDUCTOR: MATING AREA: 30µin HARD GOLD over min. 50µin NICKEL
TERMINATION SIDE: GOLD FLASH over NICKEL
- THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\varnothing 3,1 \pm 0,1$ mm; PCB-THICKNESS: 1,6mm
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3008W8SXX76E20X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)		
						date	name	material: SEE NOTES		
					drawn	19.12.14	Lehmenkühler	title: D-SUB COMBINATION FEMALE 8W8S with threaded spacer clip		
					appd.	19.12.14	Koch			
					norm					
					d-old					
	a	Original							dwg no:	DIN-A3
	rev.	description	date	name					13K1A4854	
									part no:	3008W8SXX76E20X