
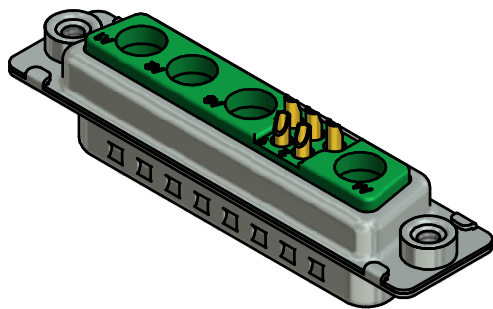

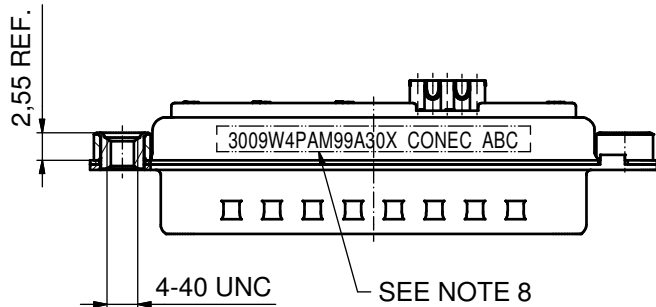
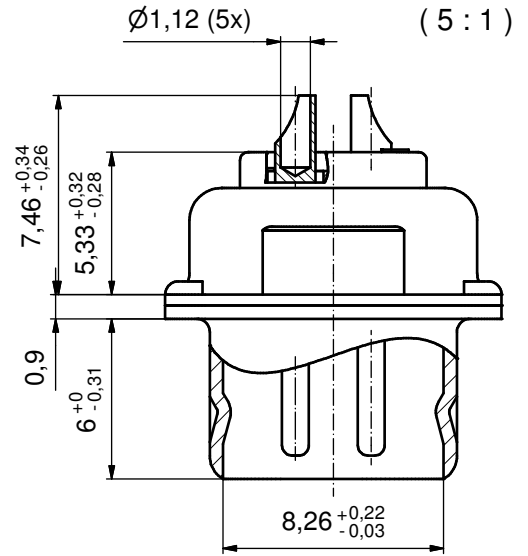


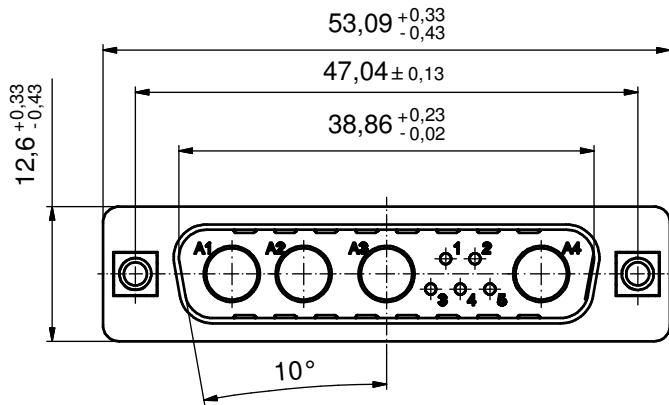

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- NO CONTACTS ON POS. A1 - A4
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3009W4PAM99A30X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH										tolerance			 dim. in mm	scale: 2:1 (5:1)																																																																																																																																																																																																																																																																																																																																																			
														material: SEE NOTES																																																																																																																																																																																																																																																																																																																																																			
															drawn	31.08.11	Henneboel	title: D-SUB COMBINATION MALE 9W4P SOLDER CUP with threaded insert																																																																																																																																																																																																																																																																																																																																															
																appd.	31.08.11					Koch																																																																																																																																																																																																																																																																																																																																											
															norm																																																																																																																																																																																																																																																																																																																																																		