


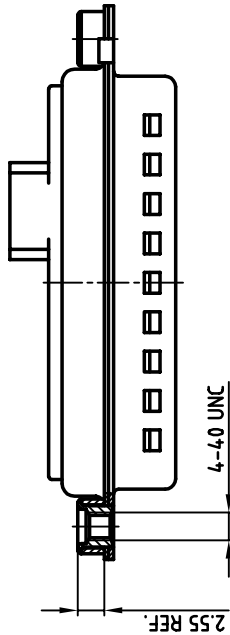


used for: D-SUB COMBINATION CRIMP

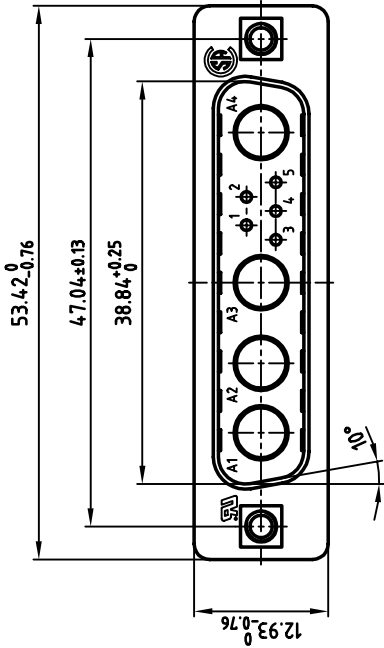

NOTES:

- METALSHELLS: STEEL, min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- COLLAR: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- ☐ = CRITICAL DIMENSION: SPC

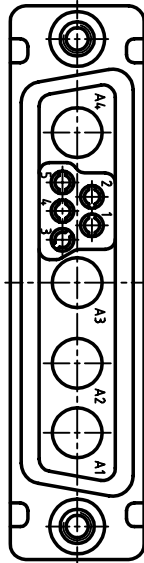

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION BRAMPTON, ONTARIO		tolerance		scale: 2:1	
				material: SEE NOTES	
				title: D-SUB COMBINATION MALE	
				CRIMP 9W4P	
				with threaded insert	
				dwg no: 13K1A297A	
				AutoCAD 2000	
				DIN-A	
				3	
				sh: 1/1	
				part no: 3009W4PK99A30X	

Directive 2002/95/EC
"RoHS"
Compliant