

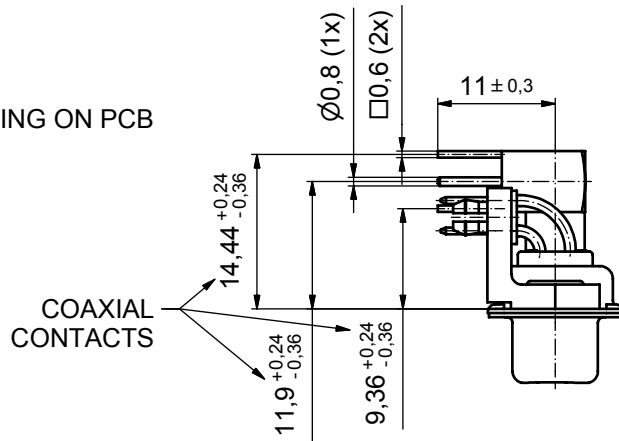
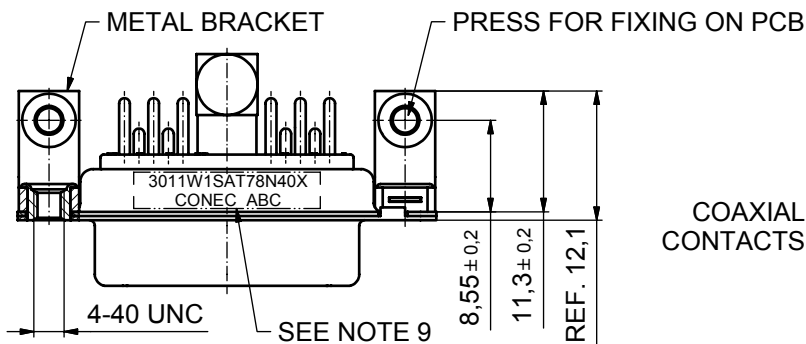
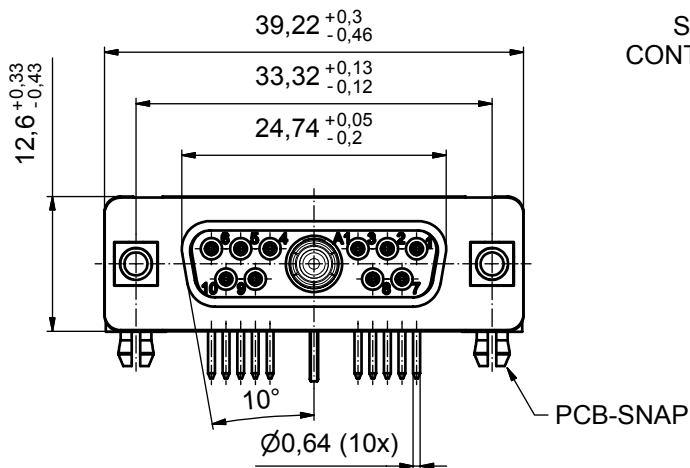
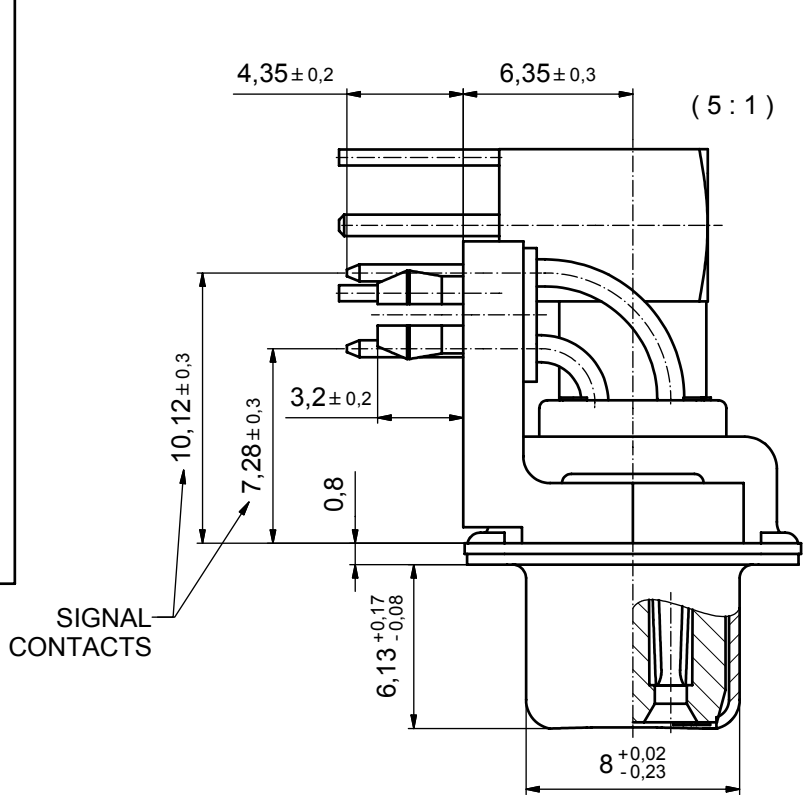


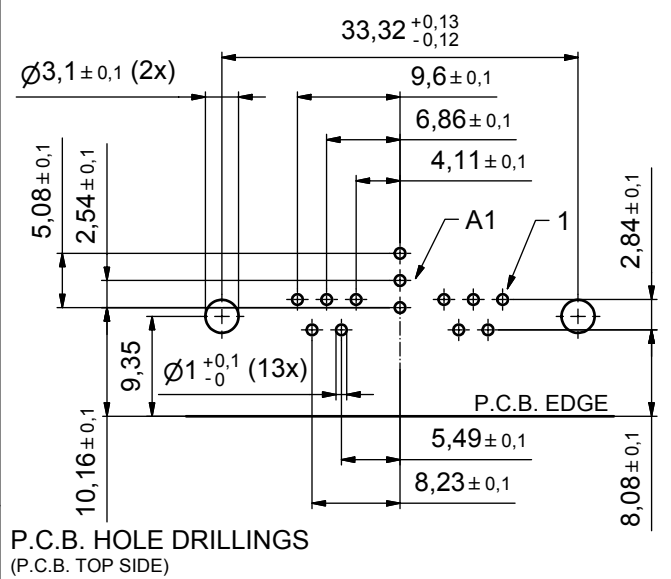

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
- COAXIAL CONTACT 50 OHM: COPPER ALLOY
PLATING INNER CONDUCTOR: 50µin HARD GOLD over min. 50µin NICKEL
PLATING OUTER CONDUCTOR: 30µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- THREADED INSERTS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- PCB-SNAPS: $\varnothing 3,1 \pm 0,1$ mm; PCB-THICKNESS: 1,6mm
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3011W1SAT78N40X CONEC ABC

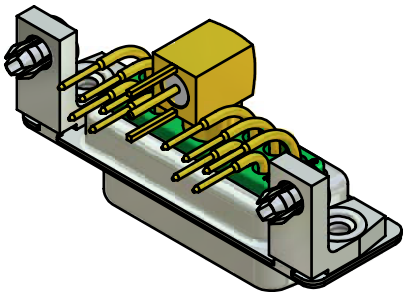

Directive 2002/95/EC
RoHS
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
rev.	description	date	name			
				date	name	
				drawn	13.08.09	Lehmenkühler
				appd.	13.08.09	Koch
				norm		
				d-old		
a	Origin					

CONEC

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB COMB. FEMALE 90° 11W1S with threaded insert, metal bracket and snap	
dwg no:	Inventor 10	DIN-A3
	13K2A1453	sh: 1
part no:	3011W1SAT78N40X	