
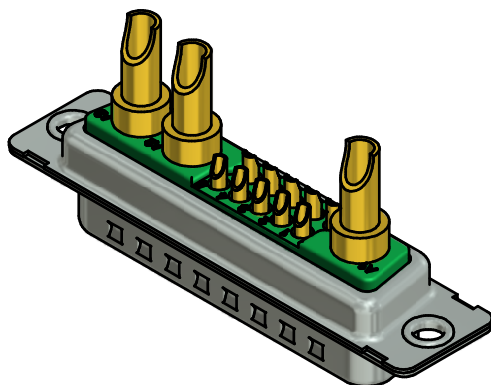

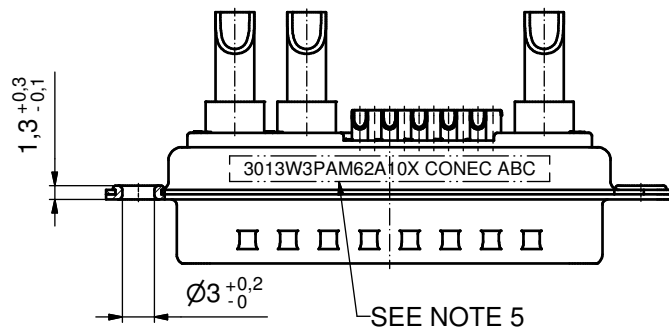
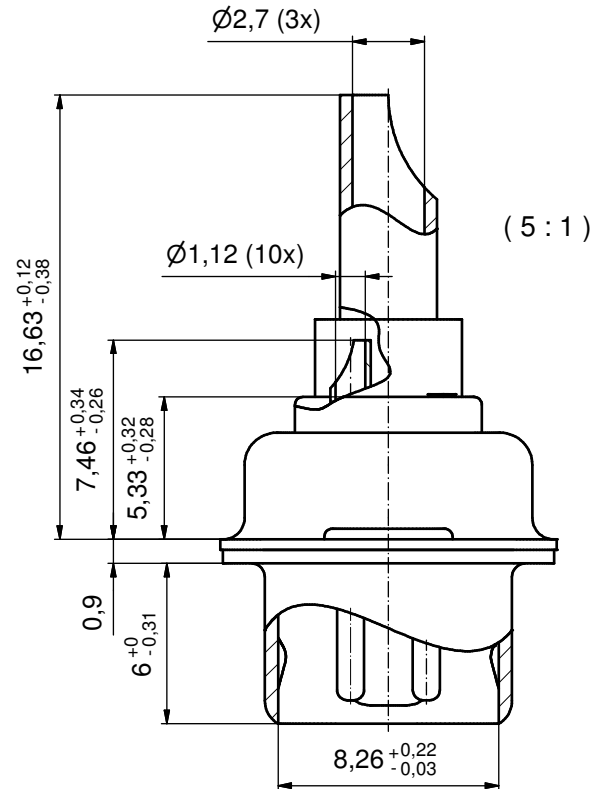


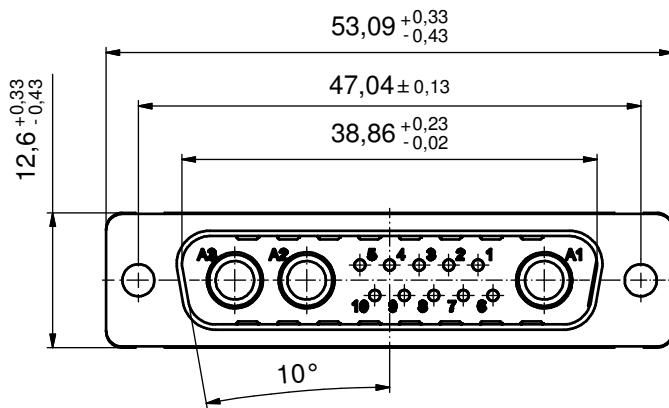

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING MATING AREA: GOLD over NICKEL
PLATING TERMINATION SIDE: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 12 - 14
- CONNECTOR IS PART MARKED: **3013W3PAM62A10X CONEC ABC**

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					tolerance		 dim. in mm	scale: 2:1 (5:1)	
								material: see notes	
						date	name	title: D-SUB COMBINATION MALE 13W3P SOLDER CUP	
					drawn	26.10.11	Henneboel		
					appd.	27.10.11	Fischer		
					norm				
					d-old				
	a	Original					dwg no:		DIN-A3
	rev.	description	date	name			13K1A3810		sh: 1
							part no: 3013W3PAM62A10X		

CONEC