

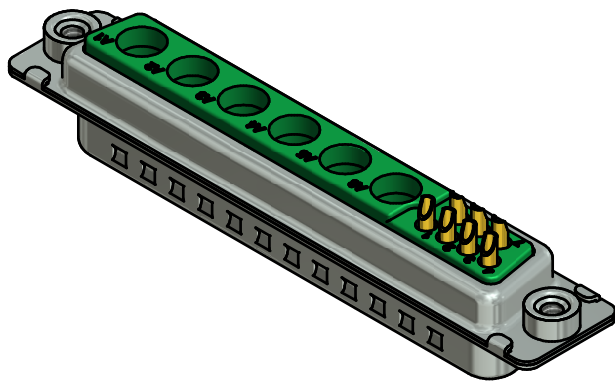

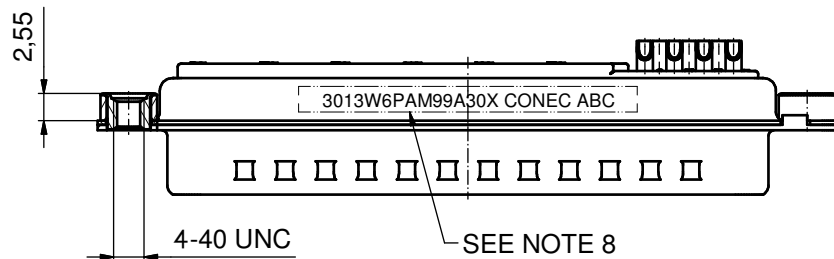


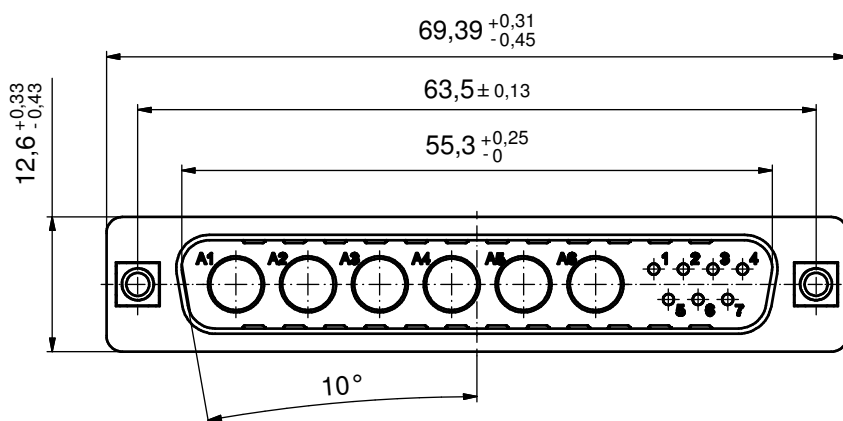

(5:1)

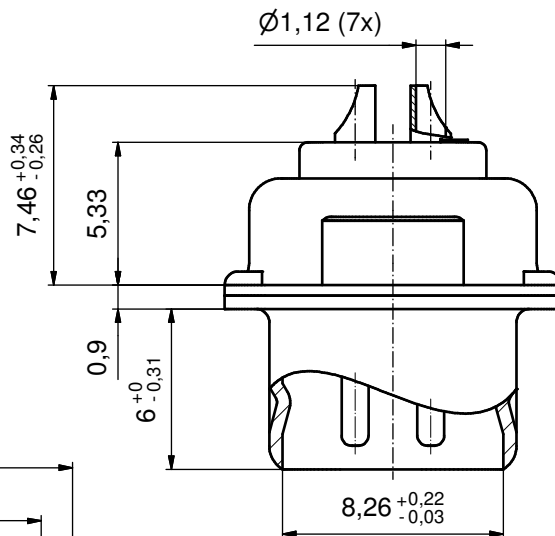

NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1-A6
5. THREADED INSERTS:
COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. COLLARS: COPPY ALLOY; min. 200µin TIN over 80µin NICKEL
7. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
8. CONNECTOR IS PART MARKED: 3013W6PAM99A30X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
				date	name		
				drawn	27.06.16	Henneboel	
				appd.	27.06.16	Lehmenkühler	
				norm			
				d-old			
a	Original						
rev.	description	date	name				

scale:		2:1 (5:1)	
material:		SEE NOTES	
title:			
D-SUB COMBINATION MALE			
13W6P SOLDER CUP			
with threaded insert			
dwg no:			DIN-A3
13K1A5234			sh: 1
part no:		3013W6PAM99A30X	