
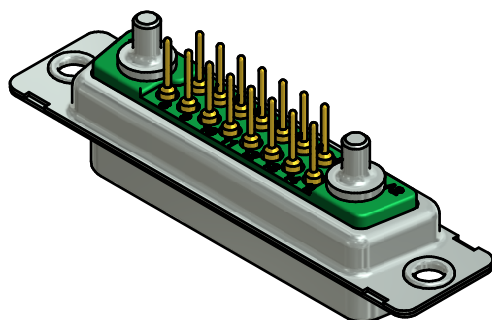

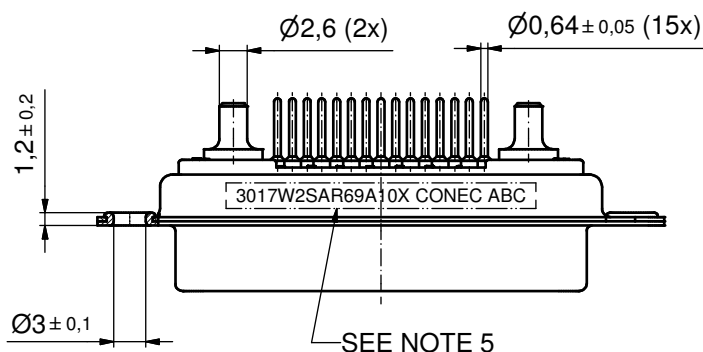
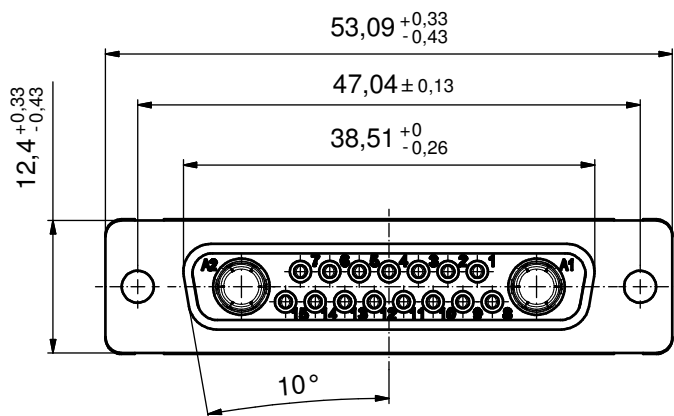
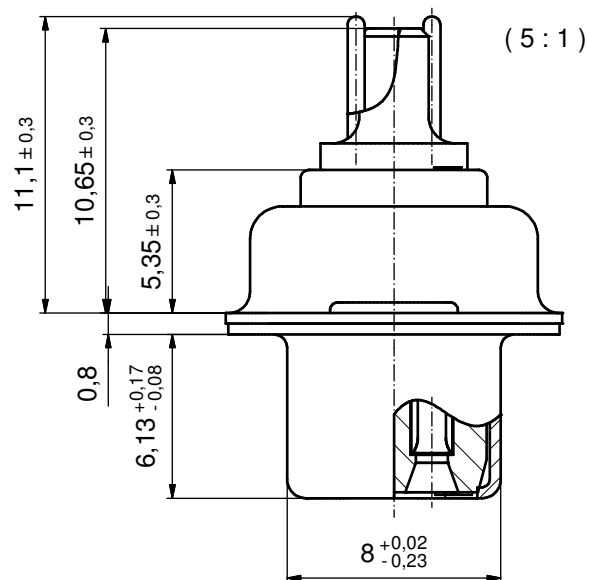


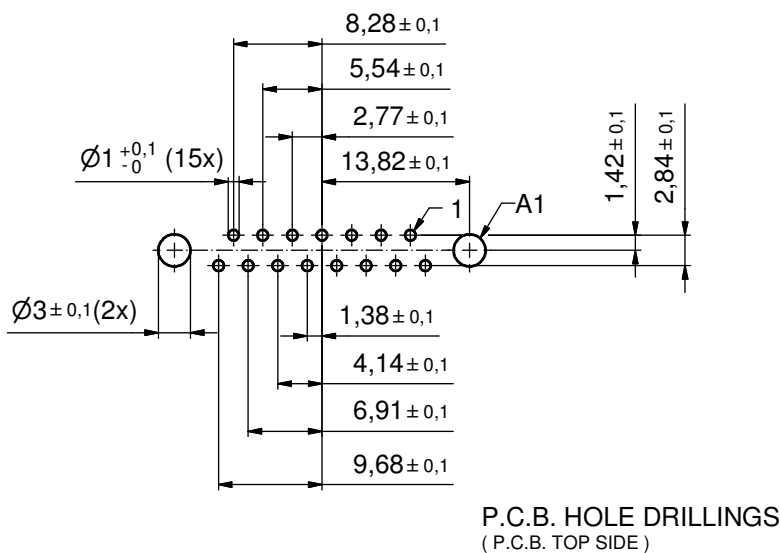

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- HIGH POWER CONTACTS 20A: COPPER ALLOY
PLATING MATING AREA: GOLD FLASH over NICKEL
PLATING TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
- CONNECTOR IS PART MARKED: 3017W2SAR69A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					tolerance		 dim. in mm	scale: 2:1 (5:1)		
								material: SEE NOTES		
					date	name	title: D-SUB COMBINATION FEMALE 17W2S with threaded rear spacer			
					drawn	21.06.12				Henneboel
					appd.	21.06.12				Koch
					norm					
					d-old		dwg no:		DIN-A3 sh: 1	
	a	Original								
	rev.	description	date	name			part no:		3017W2SAR69A10X	

CONEC

DIN-A3
sh: 1