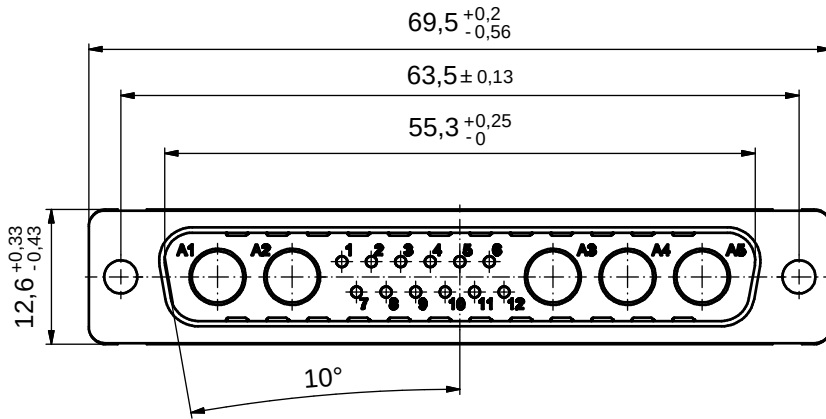
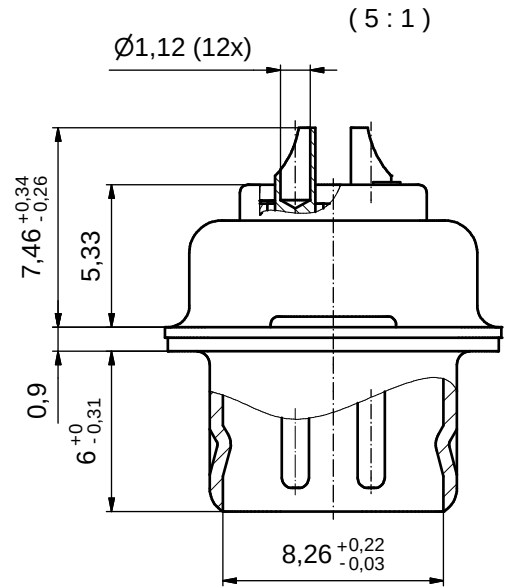
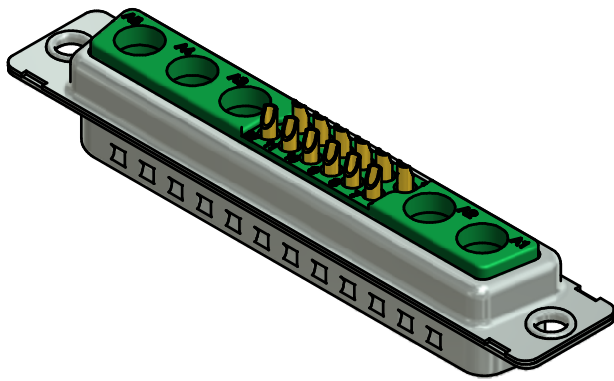


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1 - A5
5. CONNECTOR IS PART MARKED: 3017W5PAM99A10X CONEC ABC

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance			dim. in mm
rev.	description	date	name	date	name		
a	Original			drawn	04.01.2016	Unkrüer	
				appd.	04.01.2016	Lehmenkühler	
				norm			
				d-old			

CONEC

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB COMBINATION MALE 17W5P SOLDER CUP	
dwg no: 13K1A5132	DIN-A3 sh: 1
part no: 3017W5PAM99A10X	